

Design iGuzzini iGuzzini

Product configuration: QX73.01

Product code

Technical description

Installation

Colour
White (01)

Weight (Kg)
0.3

Mounting

mounting
wall recessed|ceiling recessed

Wiring

Quick-coupling connections on the ballast unit.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	851	MacAdam Step:	3
W system:	13	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Im source:	1050	Lamp code:	LED
W source:	9.9	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	65.4	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	81	Inrush current:	5 A / 50 µs
Beam angle [°]:	32°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
CRI (minimum):	90	Minimum dimming %:	1
CRI (typical):	92	Overvoltage protection:	4kV Common mode & 3kV Differential mode
Colour temperature [K]:	2700	Control:	DALI-2

Polar

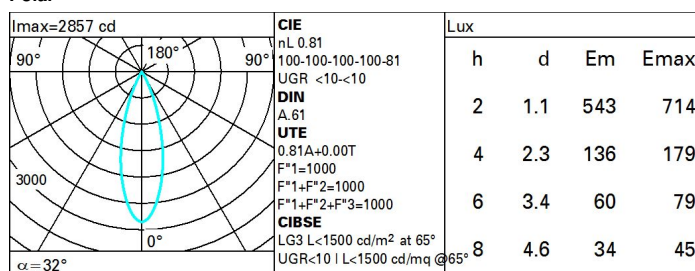

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	70	67	65	69	66	66	64	78
1.0	76	73	71	69	72	70	70	67	83
1.5	80	78	76	74	77	75	74	72	89
2.0	83	81	79	78	80	78	78	75	93
2.5	84	83	82	81	82	81	80	78	96
3.0	85	84	83	83	83	82	81	79	98
4.0	86	85	85	84	84	84	82	81	99
5.0	87	86	86	86	85	84	83	81	100

UGR diagram

Corrected UGR values (at 1050 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-8.0	-7.5	-7.7	-7.2	-7.0	-8.0	-7.5	-7.7	-7.2	-7.0
	3H	-8.1	-7.6	-7.8	-7.4	-7.1	-8.1	-7.6	-7.8	-7.4	-7.1
	4H	-8.2	-7.7	-7.8	-7.4	-7.1	-8.2	-7.7	-7.8	-7.4	-7.2
	6H	-8.2	-7.8	-7.9	-7.5	-7.2	-8.3	-7.8	-7.9	-7.5	-7.2
	8H	-8.3	-7.9	-7.9	-7.6	-7.2	-8.3	-7.9	-7.9	-7.6	-7.2
	12H	-8.3	-7.9	-7.9	-7.6	-7.2	-8.3	-8.0	-8.0	-7.6	-7.3
4H	2H	-8.2	-7.7	-7.8	-7.4	-7.2	-8.2	-7.7	-7.8	-7.4	-7.1
	3H	-8.3	-7.9	-8.0	-7.6	-7.3	-8.3	-7.9	-7.9	-7.6	-7.3
	4H	-8.4	-8.1	-8.0	-7.7	-7.3	-8.4	-8.1	-8.0	-7.7	-7.3
	6H	-8.5	-8.2	-8.1	-7.8	-7.4	-8.5	-8.2	-8.1	-7.8	-7.4
	8H	-8.5	-8.3	-8.1	-7.8	-7.4	-8.5	-8.3	-8.1	-7.9	-7.4
	12H	-8.6	-8.3	-8.1	-7.9	-7.4	-8.6	-8.4	-8.1	-7.9	-7.5
8H	4H	-8.5	-8.3	-8.1	-7.9	-7.4	-8.5	-8.3	-8.1	-7.8	-7.4
	6H	-8.6	-8.4	-8.2	-8.0	-7.5	-8.6	-8.4	-8.1	-7.9	-7.5
	8H	-8.7	-8.5	-8.2	-8.0	-7.5	-8.7	-8.5	-8.2	-8.0	-7.5
	12H	-8.7	-8.5	-8.2	-8.0	-7.5	-8.7	-8.5	-8.2	-8.1	-7.5
12H	4H	-8.6	-8.4	-8.1	-7.9	-7.5	-8.6	-8.3	-8.1	-7.9	-7.4
	6H	-8.7	-8.5	-8.2	-8.0	-7.5	-8.6	-8.4	-8.2	-8.0	-7.5
	8H	-8.7	-8.5	-8.2	-8.1	-7.5	-8.7	-8.5	-8.2	-8.0	-7.5
Variations with the observer position at spacing:											
S =		1.0H	6.7 / -11.6				6.7 / -11.6				
		1.5H	9.6 / -12.2				9.6 / -12.2				
		2.0H	11.5 / -12.6				11.5 / -12.6				