


Last information update: February 2025

Product configuration: QX73.04

QX73-04: Minimal 5 cells - Flood - LED - Black



Product code

QX73.04: Minimal 5 cells - Flood - LED - Black

Technical description

Technical description
Linear miniaturised recessed luminaire with 5 optical elements for LED lamps - fixed optic. Die-cast aluminium body, minimal version (frameless) installed flush with ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Metallised thermoplastic high definition OptiBeam reflector, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with a dimmable DALI power supply unit connected to the luminaire.

Installation

The recess body is inserted in the specific adapter installed previously by means of a steel wire spring - check the thickness of the false ceiling and use a compatible frame available with a separate item code.

Colour
Black (04)

Weight (Kg)
0.3

Mounting

mounting
wall recessed|ceiling recessed

Wiring

Quick-coupling connections on the ballast unit.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	851	MacAdam Step:	3
W system:	13	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Im source:	1050	Lamp code:	LED
W source:	9.9	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	65.4	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	81	Inrush current:	5 A / 50 µs
Beam angle [°]:	32°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
CRI (minimum):	90	Minimum dimming %:	1
CRI (typical):	92	Overvoltage protection:	4kV Common mode & 3kV Differential mode
Colour temperature [K]:	2700	Control:	DALI-2

Polar

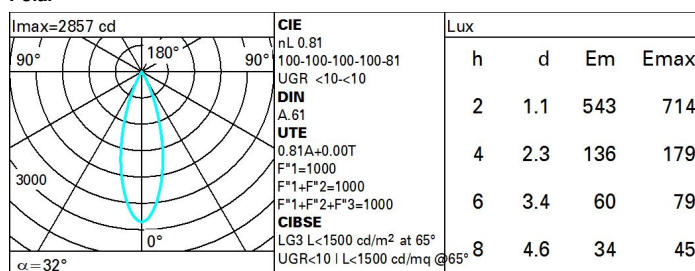

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	70	67	65	69	66	66	64	78
1.0	76	73	71	69	72	70	70	67	83
1.5	80	78	76	74	77	75	74	72	89
2.0	83	81	79	78	80	78	78	75	93
2.5	84	83	82	81	82	81	80	78	96
3.0	85	84	83	83	83	82	81	79	98
4.0	86	85	85	84	84	84	82	81	99
5.0	87	86	86	86	85	84	83	81	100

UGR diagram

Corrected UGR values (at 1050 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-8.0	-7.5	-7.7	-7.2	-7.0	-8.0	-7.5	-7.7	-7.2	-7.0
	3H	-8.1	-7.6	-7.8	-7.4	-7.1	-8.1	-7.6	-7.8	-7.4	-7.1
	4H	-8.2	-7.7	-7.8	-7.4	-7.1	-8.2	-7.7	-7.8	-7.4	-7.2
	6H	-8.2	-7.8	-7.9	-7.5	-7.2	-8.3	-7.8	-7.9	-7.5	-7.2
	8H	-8.3	-7.9	-7.9	-7.6	-7.2	-8.3	-7.9	-7.9	-7.6	-7.2
	12H	-8.3	-7.9	-7.9	-7.6	-7.2	-8.3	-8.0	-8.0	-7.6	-7.3
4H	2H	-8.2	-7.7	-7.8	-7.4	-7.2	-8.2	-7.7	-7.8	-7.4	-7.1
	3H	-8.3	-7.9	-8.0	-7.6	-7.3	-8.3	-7.9	-7.9	-7.6	-7.3
	4H	-8.4	-8.1	-8.0	-7.7	-7.3	-8.4	-8.1	-8.0	-7.7	-7.3
	6H	-8.5	-8.2	-8.1	-7.8	-7.4	-8.5	-8.2	-8.1	-7.8	-7.4
	8H	-8.5	-8.3	-8.1	-7.8	-7.4	-8.5	-8.3	-8.1	-7.9	-7.4
	12H	-8.6	-8.3	-8.1	-7.9	-7.4	-8.6	-8.4	-8.1	-7.9	-7.5
8H	4H	-8.5	-8.3	-8.1	-7.9	-7.4	-8.5	-8.3	-8.1	-7.8	-7.4
	6H	-8.6	-8.4	-8.2	-8.0	-7.5	-8.6	-8.4	-8.1	-7.9	-7.5
	8H	-8.7	-8.5	-8.2	-8.0	-7.5	-8.7	-8.5	-8.2	-8.0	-7.5
	12H	-8.7	-8.5	-8.2	-8.0	-7.5	-8.7	-8.5	-8.2	-8.1	-7.5
12H	4H	-8.6	-8.4	-8.1	-7.9	-7.5	-8.6	-8.3	-8.1	-7.9	-7.4
	6H	-8.7	-8.5	-8.2	-8.0	-7.5	-8.6	-8.4	-8.2	-8.0	-7.5
	8H	-8.7	-8.5	-8.2	-8.1	-7.5	-8.7	-8.5	-8.2	-8.0	-7.5
Variations with the observer position at spacing:											
S =		6.7 / -11.6					6.7 / -11.6				
		9.6 / -12.2					9.6 / -12.2				
		11.5 / -12.6					11.5 / -12.6				