


Last information update: October 2024

Product configuration: QY64.01

QY64.01: Fixed round recessed luminaire - LED - Super Comfort - Wall Washer - White

**Product code**

QY64.01: Fixed round recessed luminaire - LED - Super Comfort - Wall Washer - White

Technical description

Round recessed luminaire with contact frame. Wall Washer fixed version: the optic system is designed to aim the light flow on a vertical surface with no shadow zones and a precise outline. The main die-cast aluminium body includes a radiant surface that guarantees optimal heat dissipation. Structure featuring a die-cast aluminium external contact frame with a white finish only. The optical assembly includes two shaped metallised thermoplastic reflectors, a PMMA refractor/protective screen and a plastic anti-glare case available in different painted or metallised finishes. Quick, easy, tool-free assembly. 4000K high colour rendering index LED lamp. The power supply unit is available with a separate item code.

Installation

With steel wire anti-fall springs for recessed installation in false ceilings - minimum thickness of false ceiling 1 mm - preparation hole Ø 38 mm

Colour

White (01)

Weight (Kg)

0.11

Mounting

wall recessed|ceiling recessed

Wiring

Direct current ballasts available with separate item codes: ON-OFF / 1-10V dimmable / DALI dimmable / Phase Cut dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Complies with EN60598-1 and pertinent regulations




On the visible part of the product once installed

**Technical data**

Im system:	296	Colour temperature [K]:	4000
W system:	4.4	MacAdam Step:	2
Im source:	570	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	4.4	Lamp code:	LED
Luminous efficiency (Im/W, real value):	67.4	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	52	LED current [mA]:	400
CRI (minimum):	80		

Polar

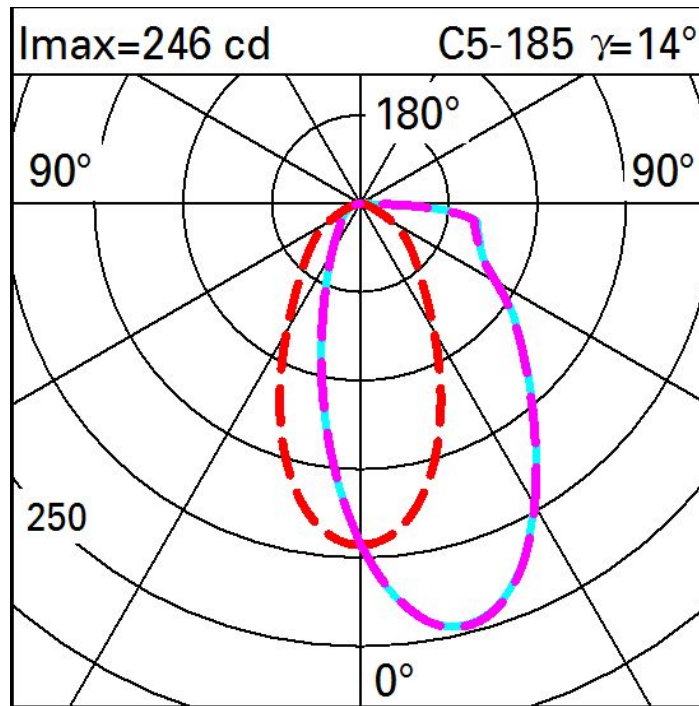

Illuminances

Lux												Wall distance = 1m	
3													
	0.2	0.7	2	9	30	58	30	9	2	0.7	0.2		
2	0.7	2	5	12	30	48	30	12	5	2	0.7		
	1	2	5	10	23	32	23	10	5	2	1		
1	1	2	4	8	16	20	16	8	4	2	1		
	1	2	4	7	10	12	10	7	4	2	1		
0													
	m	-2	-1	0	1	2	3						