


Blade R downlight

Last information update: November 2024

Product configuration: R225
R225: Minimal Ø 80 - Flood beam - LED

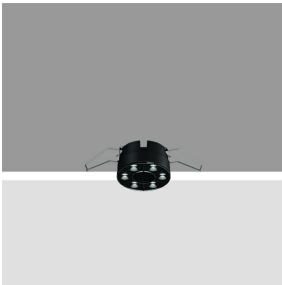

Product code
R225: Minimal Ø 80 - Flood beam - LED

Technical description
Ring luminaire with 6 optical elements for LED lamps - fixed optics. The optic system guarantees a high level of visual comfort and no glare. The body includes a radiant surface made of die-cast aluminium. Minimal (frameless) version for flush with ceiling installation. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. High definition reflectors made of thermoplastic material vacuum-metallised with aluminium vapours, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire.

Installation
Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - Ø 80 installation hole.

Colour
White (01) | Black (04) | Gold (14)* | Burnished chrome (E6)*

Weight (Kg)
0.18

* Colours on request

Mounting
ceiling recessed


Wiring
On the power supply unit with terminal board included. Available in on/off electronic versions.

Complies with EN60598-1 and pertinent regulations



Technical data			
Im system:	913	CRI (minimum):	90
W system:	12	Colour temperature [K]:	3000
Im source:	1100	MacAdam Step:	2
W source:	12	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	76.1	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	40°	Control:	On/off


Polar

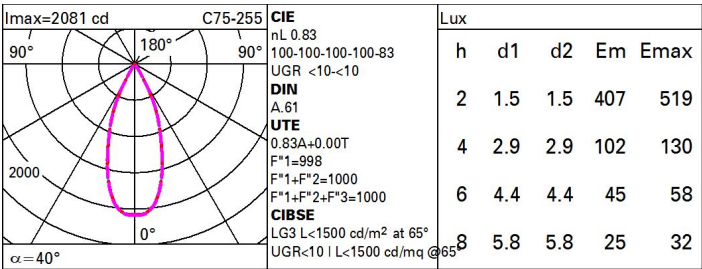

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

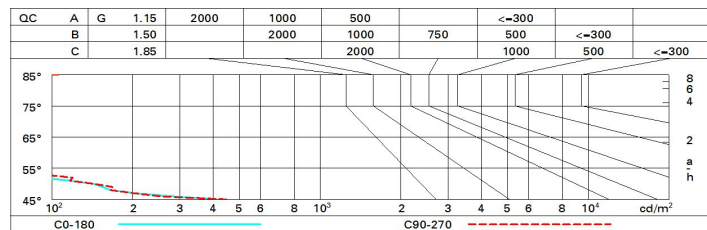

UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	3.3	3.9	3.6	4.1	4.3	3.4	4.0	3.7	4.2	4.5
	3H	3.2	3.7	3.5	4.0	4.2	3.3	3.8	3.6	4.1	4.4
	4H	3.1	3.6	3.4	3.9	4.2	3.2	3.7	3.6	4.0	4.3
	6H	3.0	3.5	3.4	3.8	4.1	3.1	3.6	3.5	3.9	4.2
	8H	3.0	3.4	3.3	3.7	4.1	3.1	3.5	3.5	3.9	4.2
	12H	2.9	3.4	3.3	3.7	4.0	3.1	3.5	3.4	3.8	4.2
4H	2H	3.1	3.6	3.4	3.9	4.2	3.2	3.7	3.6	4.0	4.3
	3H	2.9	3.4	3.3	3.7	4.0	3.1	3.5	3.4	3.8	4.2
	4H	2.9	3.2	3.3	3.6	4.0	3.0	3.3	3.4	3.7	4.1
	6H	2.8	3.1	3.2	3.5	3.9	2.9	3.2	3.3	3.6	4.0
	8H	2.7	3.0	3.2	3.4	3.9	2.9	3.1	3.3	3.6	4.0
	12H	2.7	2.9	3.1	3.4	3.8	2.8	3.1	3.3	3.5	4.0
8H	4H	2.7	3.0	3.2	3.4	3.9	2.9	3.1	3.3	3.6	4.0
	6H	2.6	2.9	3.1	3.3	3.8	2.8	3.0	3.2	3.4	3.9
	8H	2.6	2.8	3.1	3.2	3.7	2.7	2.9	3.2	3.4	3.9
	12H	2.5	2.7	3.0	3.2	3.7	2.7	2.8	3.2	3.3	3.8
12H	4H	2.7	2.9	3.1	3.4	3.8	2.8	3.1	3.3	3.5	4.0
	6H	2.6	2.8	3.1	3.2	3.7	2.7	2.9	3.2	3.4	3.9
	8H	2.5	2.7	3.0	3.2	3.7	2.7	2.8	3.2	3.3	3.8
Variations with the observer position at spacing:											
S =	1.0H	6.8 / -19.2					6.9 / -18.9				
	1.5H	9.6 / -20.8					9.7 / -20.2				
	2.0H	11.6 / -21.0					11.7 / -20.4				