


Design iGuzzini iGuzzini


Produktkonfiguration: R912
R912: 1196X296 - Neutral White - Blendschutz MPO UGR<19 - DALI

PEP
eco
PASS
PORT®

Wirkungsgrad

R	77	75	73	71	55	53	33	00	DRR
K0.8	50	44	40	37	43	39	39	35	51
1.0	55	49	45	42	48	44	44	40	58
1.5	61	57	53	50	56	52	52	48	70
2.0	65	61	58	56	60	58	57	53	77
2.5	67	64	62	60	63	61	60	57	82
3.0	68	66	64	62	65	63	62	59	86
4.0	70	68	67	65	67	65	64	62	89
5.0	71	69	68	67	68	67	66	63	91

Söller-Diagramm

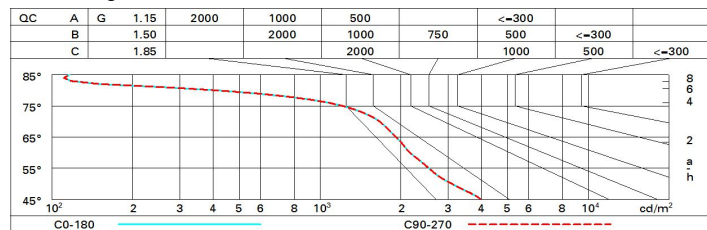

UGR-Diagramm

Corrected UGR values (at 5100 lm bare lamp luminous flux)										
Reflect.:		viewed crosswise					viewed endwise			
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim										
x y										
2H	2H	15.3	10.3	15.7	10.0	10.8	15.3	10.3	15.7	10.0
	3H	10.2	17.0	10.5	17.3	17.0	15.0	10.5	10.0	17.1
	4H	10.4	17.2	10.7	17.5	17.8	15.7	10.5	10.1	17.1
	6H	10.4	17.1	10.8	17.5	17.8	15.7	10.5	10.1	17.1
	8H	10.4	17.1	10.7	17.4	17.8	15.7	10.4	10.1	17.1
	12H	10.3	17.0	10.7	17.4	17.7	15.7	10.3	10.0	17.0
4H	2H	15.7	10.5	10.1	10.8	17.1	10.4	17.2	10.7	17.5
	3H	10.7	17.4	17.1	17.7	18.1	10.8	17.5	17.2	18.2
	4H	17.0	17.0	17.4	17.9	18.3	17.0	17.0	17.4	17.9
	6H	17.0	17.5	17.4	17.9	18.4	17.0	17.0	17.5	18.0
	8H	17.0	17.4	17.4	17.9	18.3	17.0	17.5	17.5	17.9
	12H	10.9	17.4	17.4	17.8	18.3	17.0	17.4	17.4	17.8
8H	4H	17.0	17.5	17.5	17.9	18.4	17.0	17.4	17.4	17.9
	6H	17.1	17.5	17.5	17.9	18.4	17.0	17.4	17.5	17.9
	8H	17.0	17.4	17.5	17.8	18.3	17.0	17.4	17.5	17.8
	12H	17.0	17.3	17.5	17.8	18.3	17.0	17.3	17.5	17.8
12H	4H	17.0	17.4	17.4	17.8	18.3	10.9	17.4	17.4	17.8
	6H	17.0	17.4	17.5	17.8	18.3	17.0	17.3	17.5	17.8
	8H	17.0	17.3	17.5	17.8	18.3	17.0	17.3	17.5	17.8
Variations with the observer position at spacing:										
S =		1.0H	0.5 / -0.6				0.5 / -0.6			
		1.5H	0.9 / -1.4				0.9 / -1.4			
		2.0H	1.8 / -1.9				1.8 / -1.9			