

iGuzzini

Product configuration: RA01.G1

RA01.G1: L=2772 mm - INVERTER - down emission - Black / dark space



RA01.G1: L=2772 mm - INVERTER - down emission - Black / dark space

Luminaire L = 2772 mm complete with LED lamp in neutral white colour tone 4000K. Body made of extruded painted aluminium and a thermoplastic raster with a white finish or a patented "Opti Diamond" technology, translucent textured thermoplastic raster created with a catadioptric system and no galvanic treatments. Product with high efficiency down emission LED UGR<19 L<3000 cd/mq $\alpha > 65^\circ$ emission, for use in environments with video monitors in compliance with EN 12464-1. The DALI driver is housed in the upper part of the luminaire. Possibility of pendant or surface-mounted installation using kit to be ordered separately as an accessory. The luminaire can be installed individually or in a continuous line. Product complete with INVERTER kit for emergency operation.

Pendant or surface-mounted installation using a kit to be ordered separately.

Colour
Black/Black Transparent (G1)

Weight (Kg)
8.76

ceiling surface

Product complete with DALI and INVERTER components for emergency lighting. Possibility of integrating ILS components available as accessories. The electrical cables used are made of a "halogen free" material.

The accessory kit for pendant installations includes a pair of end caps for individual installations.

Complies with EN60598-1 and pertinent regulations



Im system:	4958
W system:	45.3
Im source:	6700
W source:	38
Luminous efficiency (lm/W, real value):	109.4
Im in emergency mode:	-
Total light flux at or above an angle of 90° [Lm]:	0
Light Output Ratio (L.O.R.) [%]:	74
CRI (minimum):	90
Colour temperature [K]:	4000
MacAdam Step:	3
Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)


Voltage [Vin]:	230
Lamp code:	LED
Number of lamps for optical assembly:	1
ZVEI Code:	LED
Number of optical assemblies:	1
Power factor:	See installation instructions
Inrush current:	10 A / - µs
Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 12 luminaires B16A: 20 luminaires C10A: 20 luminaires C16A: 34 luminaires
Minimum dimming %:	1
Overvoltage protection:	2kV Common mode & 1kV Differential mode
Control:	DALI-2

[illegible]

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	56	50	46	42	49	45	45	41	55
1.0	60	55	51	48	54	50	50	46	62
1.5	67	62	59	56	61	58	57	54	73
2.0	70	67	64	62	66	63	62	59	80
2.5	72	70	67	65	68	66	65	62	84
3.0	74	72	70	68	70	69	67	65	87
4.0	75	74	72	71	72	71	70	67	91
5.0	76	75	74	73	74	72	71	68	93

Luminance curve limit

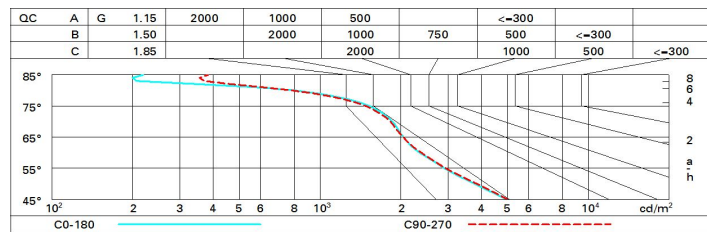

UGR diagram

Corrected UGR values (at 6700 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	15.5	16.4	15.8	16.6	16.9	15.5	16.4	15.8	16.7	16.9
	3H	16.2	16.9	16.5	17.2	17.5	15.7	16.5	16.1	16.8	17.1
	4H	16.4	17.1	16.7	17.4	17.7	15.8	16.5	16.1	16.8	17.1
	6H	16.5	17.1	16.8	17.5	17.8	15.8	16.5	16.2	16.8	17.1
	8H	16.4	17.1	16.8	17.4	17.8	15.8	16.4	16.1	16.8	17.1
	12H	16.4	17.0	16.8	17.4	17.7	15.7	16.4	16.1	16.7	17.1
4H	2H	15.8	16.5	16.1	16.8	17.1	16.4	17.1	16.7	17.4	17.7
	3H	16.6	17.2	17.0	17.6	18.0	16.8	17.4	17.2	17.8	18.1
	4H	17.0	17.5	17.4	17.9	18.3	16.9	17.5	17.3	17.9	18.3
	6H	17.1	17.6	17.5	18.0	18.4	17.1	17.5	17.5	17.9	18.4
	8H	17.1	17.5	17.5	17.9	18.4	17.1	17.5	17.5	17.9	18.4
	12H	17.0	17.4	17.5	17.9	18.3	17.0	17.4	17.5	17.9	18.3
8H	4H	17.1	17.5	17.5	17.9	18.4	17.0	17.5	17.5	17.9	18.4
	6H	17.3	17.6	17.7	18.1	18.5	17.2	17.6	17.7	18.0	18.5
	8H	17.2	17.5	17.7	18.0	18.5	17.2	17.5	17.7	18.0	18.5
	12H	17.2	17.5	17.7	17.9	18.5	17.2	17.5	17.7	18.0	18.5
12H	4H	17.0	17.4	17.5	17.9	18.3	17.0	17.4	17.5	17.8	18.3
	6H	17.2	17.5	17.7	18.0	18.5	17.2	17.5	17.6	17.9	18.4
	8H	17.2	17.5	17.7	18.0	18.5	17.2	17.5	17.7	17.9	18.5
Variations with the observer position at spacing:											
S =	1.0H	0.5 / -0.7					0.5 / -0.7				
	1.5H	1.2 / -1.5					1.2 / -1.6				
	2.0H	2.3 / -1.9					2.3 / -2.0				