

Last information update: May 2025

Product configuration: RE05.D8

RE05.D8: 9-cell recessed luminaire - Wall Washer - DALI - White / transparent

**Product code**

RE05.D8: 9-cell recessed luminaire - Wall Washer - DALI - White / transparent

Technical description

Recessed luminaire for vertical lighting consisting of a lamp device, 9-cell emission raster and operating components. LED lamps with high color rendering index. Main body made of extruded aluminium - anodised finish - cast zamak end caps - natural finish. Polycarbonate LED lamp support. Steel wire fixing springs. The optical system consists of a translucent textured methacrylate raster, created with a catadioptric system (patented Opti Beam Diamond optic) - with no galvanic treatments - combined with a gloss finish PET cover. The raster includes multiple lens diaphragms for LED lamps. The combined application of specially shaped screens produces a high-definition, asymmetrical emission on a vertical surface. DALI dimmable driver connected to the luminaire.

Installation

recessed with steel wire contrast springs; slot to make in false ceiling: 63 x 543

Colour

White Transparent (D8)

Weight (Kg)

1.33

Mounting

ceiling recessed

Wiring

complete with integrated DALI power supply; quick-coupling connections on driver.

Notes

for the optimum installation distances for recessed wall washers, consult the instruction sheet.

TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations


IP20

IP43

On the visible part of
the product once installed**Technical data**

Im system:	4093	Colour temperature [K]:	4000
W system:	34.8	MacAdam Step:	3
Im source:	5350	Life Time LED 1:	> 50,000h - L85 - B10 (Ta 25°C)
W source:	31	Lamp code:	LED
Luminous efficiency (Im/W, real value):	117.6	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	43	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	77	Control:	DALI-2
CRI (minimum):	90		

Polar

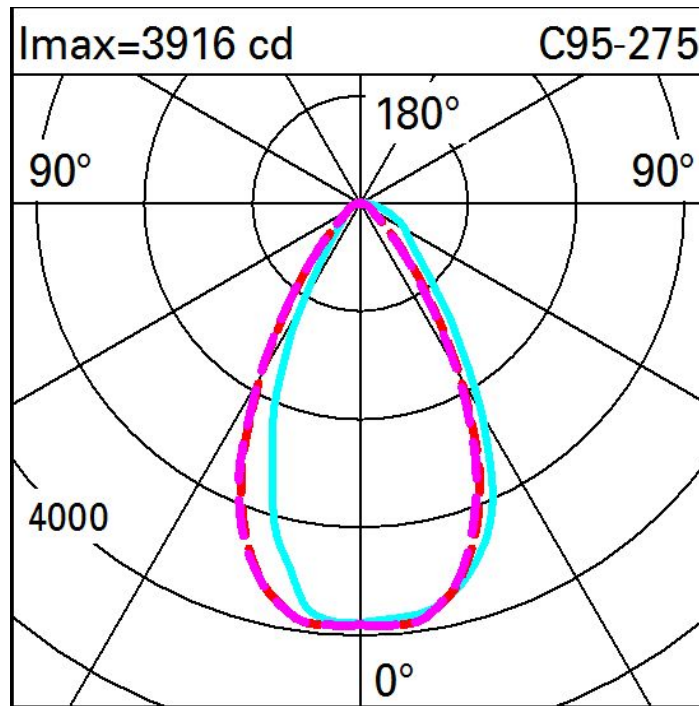

Illuminances

Lux													Wall distance = 1m	
3														
	3	8	19	54	162	289	162	54	19	8	3			
2	5	11	25	66	184	288	184	66	25	11	5			
	6	12	30	90	213	297	213	90	30	12	6			
1	7	15	40	106	196	250	196	106	40	15	7			
	8	21	50	98	146	173	146	98	50	21	8			
0														
	m	-2	-1	0	1	2	3							