
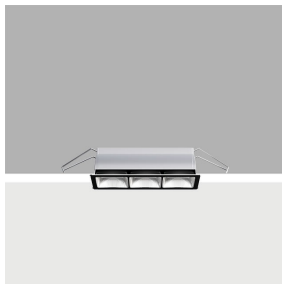


Last information update: February 2025

**Product configuration: RE69.83**

RE69.83: 3-cell recessed luminaire - MEDIUM beam - Transparent/Black

**Product code**

RE69.83: 3-cell recessed luminaire - MEDIUM beam - Transparent/Black

**Technical description**

Recessed luminaire consisting of a lamp device and a 3-cell emission raster - model with operating components to be ordered separately. Version with focused optics - medium opening. Main body made of extruded aluminium - anodised finish - cast zamak end caps - natural finish. Polycarbonate LED lamp support. Steel wire fixing springs. The optical system consists of a translucent textured methacrylate raster, created with a catadioptric system (patented Opti Beam Diamond optic) - with no galvanic treatments - combined with a gloss finish PET cover. The raster includes multiple lens diaphragms for LED lamps, designed to obtain an emission with a concentrated flux, recommended for lighting environments with a linear layout (e.g. corridors, galleries and aisles). The accessory wiring components also include the use of several recessed luminaires with a single power supply unit.

**Installation**

recessed with steel wire contrast springs; slot to make in false ceiling: 63 x 183

**Colour**

Black Transparent (83)

**Weight (Kg)**

0.4

**Mounting**

ceiling recessed

**Wiring**

Drivers and wiring components are available with a separate item code. This system allows several recessed luminaires to be used (2 / 3 max) with a single power supply unit. The product can also be connected to centralised emergency systems in compliance with the EN60598-2-22 standard. For more detailed information, see the instruction sheet.


**Notes**

Possibility of multiple uses through the use of splitters (mandatory) and connection extensions to be ordered separately. TPA version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations

**Technical data**


lm system:	1338	CRI (minimum):	80
W system:	8.4	Colour temperature [K]:	4000
lm source:	1760	MacAdam Step:	3
W source:	8.4	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	159.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	13	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	76	Number of optical assemblies:	1
Beam angle [°]:	36°		

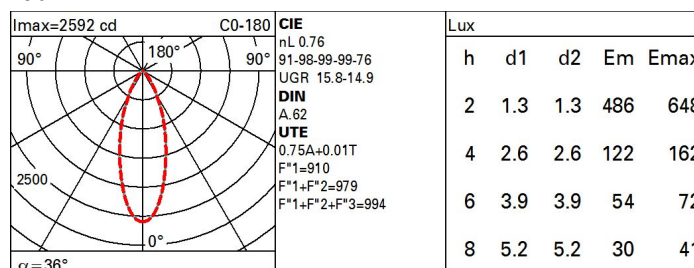**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	65	61	58	56	60	57	57	54	72
1.0	69	65	62	60	64	61	61	58	77
1.5	73	70	68	66	69	67	66	63	84
2.0	76	73	72	70	72	71	70	67	89
2.5	77	76	74	73	74	73	72	70	92
3.0	78	77	76	75	76	75	74	71	95
4.0	80	78	78	77	77	76	75	73	97
5.0	80	79	79	78	78	77	76	74	98

# Luminance curve limit

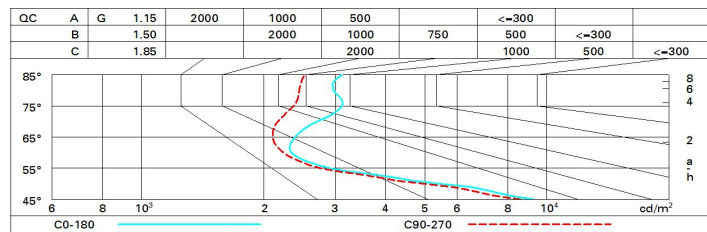

# UGR diagram

Corrected UGR values (at 1760 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	14.6	15.4	14.9	15.6	15.9	14.5	15.2	14.8	15.5	15.7
	3H	14.9	15.5	15.2	15.8	16.1	14.4	15.1	14.8	15.4	15.7
	4H	15.1	15.7	15.4	16.0	16.3	14.4	15.0	14.7	15.3	15.6
	6H	15.3	15.9	15.7	16.2	16.5	14.3	14.9	14.7	15.2	15.6
	8H	15.4	15.9	15.8	16.3	16.6	14.3	14.8	14.7	15.2	15.6
	12H	15.5	16.0	15.9	16.3	16.7	14.3	14.8	14.7	15.1	15.5
4H	2H	14.5	15.1	14.9	15.4	15.8	14.7	15.3	15.1	15.6	16.0
	3H	14.9	15.4	15.3	15.7	16.1	14.8	15.3	15.2	15.6	16.0
	4H	15.2	15.7	15.7	16.1	16.5	14.8	15.3	15.2	15.6	16.0
	6H	15.6	16.0	16.1	16.4	16.9	14.8	15.2	15.3	15.6	16.1
	8H	15.8	16.1	16.2	16.6	17.0	14.9	15.2	15.3	15.6	16.1
	12H	15.9	16.2	16.4	16.7	17.1	14.8	15.2	15.3	15.6	16.1
8H	4H	15.3	15.6	15.7	16.1	16.5	15.2	15.6	15.7	16.0	16.4
	6H	15.8	16.0	16.2	16.5	17.0	15.4	15.6	15.8	16.1	16.6
	8H	16.0	16.2	16.5	16.7	17.2	15.4	15.7	15.9	16.2	16.7
	12H	16.2	16.4	16.7	16.9	17.4	15.5	15.7	16.0	16.2	16.8
12H	4H	15.2	15.6	15.7	16.0	16.5	15.3	15.6	15.8	16.1	16.5
	6H	15.8	16.0	16.3	16.5	17.0	15.5	15.7	16.0	16.2	16.7
	8H	16.0	16.2	16.5	16.7	17.3	15.6	15.8	16.1	16.3	16.9
Variations with the observer position at spacing:											
S =	1.0H	1.9 / -1.9					2.1 / -2.2				
	1.5H	3.9 / -2.2					4.2 / -2.6				
	2.0H	5.6 / -2.4					6.0 / -2.8				