

## Easy Space Square


Design iGuzzini

iGuzzini

Last information update: April 2025

### Product configuration: RI82.D8

RI82.D8: Square 225 - UGR < 19 - DALI - Warm White - 16.7W 2217.2lm - 3000K - White Transparent

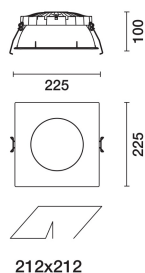

### Product code

RI82.D8: Square 225 - UGR < 19 - DALI - Warm White - 16.7W 2217.2lm - 3000K - White Transparent

### Technical description

Square recess luminaire with fixed optics, in version with outer frame. High efficiency LED source. Controlled luminance emission  $L < 3000 \text{ cd/sm}$  - UGR < 19 - ideal for environments with video screen use. Emission unit integrated into the polycarbonate external structure - made up of PMMA prismatic reflector in combination with flow recovery unit and transparent PMMA flat screen combined with the PET film with satin finish. The painted die-cast aluminium diffuser encompasses the steel wire coupling springs. A DALI dimmer power supply unit connected to the luminaire.

### Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick

### Colour

White Transparent (D8)

### Weight (Kg)

1.18

### Mounting

ceiling surface

### Wiring

DALI dimmer functioning components included - power supply connection on the terminals with rapid connection of the driver.

### Notes

TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of the product once installed



### Technical data

Im system:	2217	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	16.7	Lamp code:	LED
Im source:	2410	Number of lamps for optical assembly:	1
W source:	14	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	132.8	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	18 A / 250 µs
Light Output Ratio (L.O.R.) [%]:	92	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 21 luminaires B16A: 34 luminaires C10A: 35 luminaires C16A: 57 luminaires
CRI (minimum):	80	Minimum dimming %:	1
Colour temperature [K]:	3000	Overvoltage protection:	2kV Common mode & 1kV Differential mode
MacAdam Step:	2	Control:	DALI-2


### Polar

Imax=1514 cd				C0-180				CIE				Lux			
90°				180°				nL 0.92				h	d1	d2	Em Emax
								75-97-99-100-92				1	1.5	1.6	1063 1513
								UGR 18.0-17.9				2	3.1	3.1	266 378
								DIN A.61				3	4.6	4.7	118 168
								UTE 0.92B+0.00T				4	6.1	6.3	66 95
								F*1=753							
								F*1+F*2=967							
								F*1+F*2+F*3=994							
								CIBSE							
								LG3 L<3000 cd/m² at 65°							
								UGR<19   L<3000 cd/mq @65°							
$\alpha = 75^\circ / 76^\circ$															

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	66	61	57	65	60	60	55	60
1.0	78	72	67	64	70	66	66	62	67
1.5	85	80	77	74	79	76	75	71	77
2.0	89	86	83	80	84	82	81	77	84
2.5	92	89	86	84	87	85	84	80	87
3.0	93	91	89	87	89	87	86	83	90
4.0	95	93	91	90	91	90	88	85	93
5.0	96	94	93	92	92	91	90	87	94

# Luminance curve limit

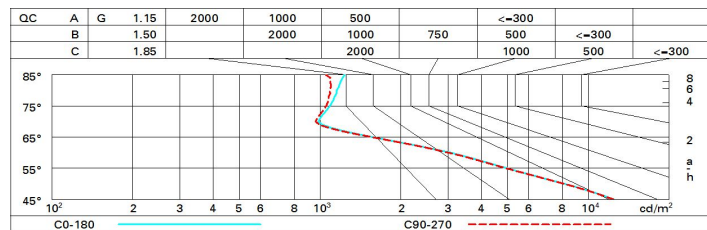

# UGR diagram

Corrected UGR values (at 2410 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	18.1	18.9	18.4	19.2	19.4	18.1	18.9	18.4	19.2	19.4
	3H	18.0	18.8	18.3	19.1	19.3	18.2	18.9	18.5	19.2	19.5
	4H	18.0	18.7	18.3	19.0	19.3	18.1	18.8	18.5	19.1	19.4
	6H	17.9	18.6	18.3	18.9	19.2	18.0	18.7	18.4	19.0	19.4
	8H	17.9	18.6	18.3	18.9	19.2	18.0	18.6	18.4	19.0	19.3
	12H	17.9	18.5	18.3	18.8	19.2	18.0	18.6	18.4	18.9	19.3
4H	2H	18.1	18.8	18.5	19.1	19.4	18.0	18.7	18.3	19.0	19.3
	3H	18.1	18.7	18.4	19.0	19.4	18.1	18.7	18.5	19.0	19.4
	4H	18.0	18.6	18.4	18.9	19.3	18.0	18.6	18.4	18.9	19.3
	6H	18.0	18.5	18.5	18.9	19.3	18.0	18.4	18.4	18.8	19.3
	8H	18.0	18.4	18.5	18.9	19.3	17.9	18.4	18.4	18.8	19.2
	12H	18.0	18.4	18.5	18.8	19.3	17.9	18.3	18.4	18.7	19.2
8H	4H	17.9	18.4	18.4	18.8	19.2	18.0	18.4	18.5	18.9	19.3
	6H	18.0	18.3	18.4	18.8	19.2	18.0	18.3	18.5	18.8	19.3
	8H	18.0	18.3	18.5	18.7	19.2	18.0	18.3	18.5	18.7	19.2
	12H	18.0	18.3	18.5	18.7	19.3	18.0	18.2	18.5	18.7	19.2
12H	4H	17.9	18.3	18.4	18.7	19.2	18.0	18.4	18.5	18.8	19.3
	6H	17.9	18.2	18.4	18.7	19.2	18.0	18.3	18.5	18.8	19.3
	8H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
Variations with the observer position at spacing:											
S =	1.0H	1.0 / -2.5					1.1 / -2.6				
	1.5H	2.6 / -5.3					2.6 / -5.4				
	2.0H	4.3 / -7.0					4.4 / -7.1				