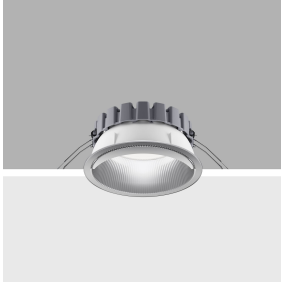


Last information update: April 2025

Product configuration: RM30

RM30: Ø 153 mm - warm white - WW - DALI

**Product code**

RM30: Ø 153 mm - warm white - WW - DALI

Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Prismatic thermoplastic reflector complete with flux enhancer and metallised flap to guarantee optimum vertical downlight. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3500K). Wall-washer light emission.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.

Colour

White/Transparent/Chrome (F6) | Black/transparent/chrome (F8)

Weight (Kg)


0.76

Mounting

ceiling surface

Wiring

Product complete with DALI components



Complies with EN60598-1 and pertinent regulations




IP20

IP54

On the visible part of
the product once installed**Technical data**

lm system:	1826	Colour temperature [K]:	3500
W system:	17	MacAdam Step:	2
lm source:	2200	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	15	Lamp code:	LED
Luminous efficiency (lm/W, real value):	107.4	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	Control:	DALI-2
CRI (minimum):	90		

Polar

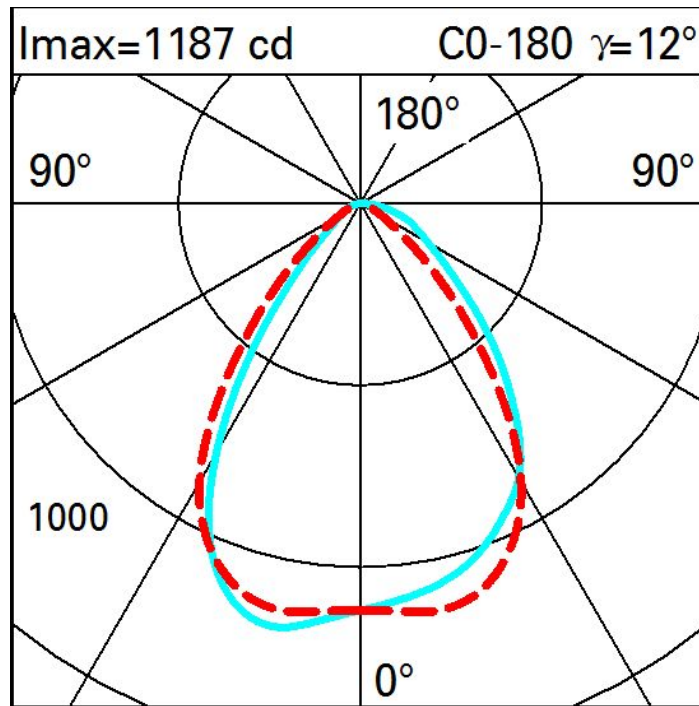

Illuminances

Lux											
						Wall distance = 1m					
3											
	1	3	9	29	81	127	81	29	9	3	1
2	2	5	13	41	110	166	110	41	13	5	2
	3	7	20	55	108	139	108	55	20	7	3
1	5	11	25	49	76	87	76	49	25	11	5
	6	13	24	38	48	53	48	38	24	13	6
0											
	m	-2	-1	0	1	2	3				