

Easy Space Square




Design iGuzzini

iGuzzini

Last information update: April 2025

Product configuration: RM39.83

RM39.83: Square 105 - General Lighting - DALI - Warm White - Low Output - 9.5W 1029.2lm - 3500K - CRI 90 - Black Transparent



Product code

RM39.83: Square 105 - General Lighting - DALI - Warm White - Low Output - 9.5W 1029.2lm - 3500K - CRI 90 - Black Transparent

Technical description

Square recess luminaire with fixed optics, in version with outer frame. LED source with high colour rendering index for general lighting uses. Reduced flow version to optimise visual comfort. Emission unit made up of a transparent PMMA prismatic reflector in combination with the flow recovery unit and diffuser screen, both produced in PMMA, integrated into the external polycarbonate structure. The painted die-cast aluminium diffuser encompasses the steel wire coupling springs. A DALI dimmer power supply unit connected to the luminaire.

Installation

recessed with steel wire springs for false ceilings from 1 to 25 mm thick

Colour

Black Transparent (83)

Weight (Kg)

0.35

Mounting

ceiling surface

Wiring

DALI dimmer functioning components included - power supply connection on the terminals with rapid connection of the driver.

Notes

TPa version available on request, contact iGuzzini for more info

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of the product once installed



pending

Technical data

Im system:	1029	Colour temperature [K]:	3500
W system:	9.5	MacAdam Step:	2
Im source:	1240	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	7.9	Lamp code:	LED
Luminous efficiency (lm/W, real value):	108.3	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	Control:	DALI-2
CRI (minimum):	90		


Polar

<p>Imax=867 cd C0-180 90° 180° 90° 900 0° α = 65°</p>	<p>CIE nL 0.83 81-97-99-100-83 UGR 19.3-19.1 DIN A.61 UTE 0.83B+0.00T F*1=815 F*1+F*2=974 F*1+F*2+F*3=993</p>	Lux				
		h	d1	d2	Em	E _{max}
		1	1.3	1.3	622	866
		2	2.6	2.6	155	217
		3	3.9	3.9	69	96
		4	5.1	5.2	39	54

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	62	58	55	61	58	57	54	65
1.0	72	67	63	61	66	63	62	59	71
1.5	78	74	71	69	73	70	70	66	80
2.0	81	79	76	74	77	75	74	71	86
2.5	83	81	79	78	80	78	77	74	89
3.0	85	83	81	80	81	80	79	76	92
4.0	86	85	83	82	83	82	81	78	94
5.0	87	86	85	84	84	83	82	79	95

Luminance curve limit

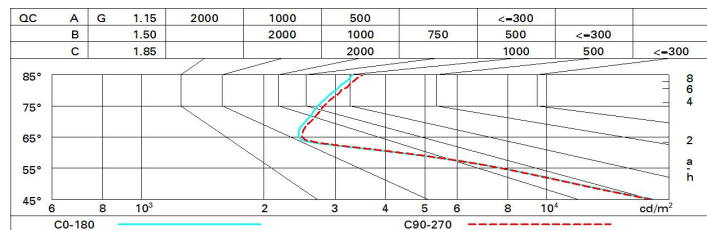

UGR diagram

Corrected UGR values (at 1240 lm bare lamp luminous flux)										
Reflect.:		viewed crosswise					viewed endwise			
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim										
x y										
2H	2H	19.3	20.0	19.6	20.3	20.5	19.3	20.0	19.5	20.3
	3H	19.2	19.9	19.5	20.2	20.5	19.2	19.9	19.5	20.2
	4H	19.2	19.9	19.5	20.1	20.5	19.2	19.8	19.5	20.1
	6H	19.2	19.8	19.6	20.1	20.5	19.1	19.7	19.4	20.0
	8H	19.2	19.8	19.6	20.1	20.5	19.1	19.6	19.4	20.0
	12H	19.2	19.8	19.6	20.1	20.5	19.0	19.6	19.4	20.0
4H	2H	19.2	19.8	19.5	20.1	20.4	19.2	19.8	19.5	20.1
	3H	19.1	19.7	19.5	20.0	20.4	19.2	19.8	19.6	20.1
	4H	19.2	19.6	19.6	20.0	20.4	19.2	19.6	19.6	20.0
	6H	19.2	19.7	19.7	20.1	20.5	19.1	19.5	19.5	19.9
	8H	19.3	19.7	19.7	20.1	20.5	19.1	19.5	19.5	19.9
	12H	19.3	19.7	19.8	20.1	20.6	19.1	19.4	19.5	19.8
8H	4H	19.1	19.5	19.5	19.9	20.3	19.3	19.7	19.7	20.1
	6H	19.2	19.5	19.7	20.0	20.4	19.3	19.6	19.8	20.1
	8H	19.3	19.6	19.8	20.0	20.5	19.3	19.6	19.8	20.1
	12H	19.4	19.6	19.9	20.1	20.6	19.3	19.5	19.8	20.0
12H	4H	19.1	19.4	19.5	19.8	20.3	19.3	19.7	19.8	20.1
	6H	19.2	19.5	19.7	19.9	20.4	19.4	19.7	19.9	20.1
	8H	19.3	19.5	19.8	20.0	20.5	19.4	19.7	19.9	20.1
Variations with the observer position at spacing:										
S =		2.1 / -2.9					2.1 / -2.8			
		3.4 / -4.8					3.4 / -4.6			
		5.2 / -5.2					5.2 / -5.0			