

Last information update: March 2025

Product configuration: RP13.11

RP13.11: Pendant-mounted luminaire - UP/DOWN - Ø234 - UGR < 19 - White-Champagne/White Transparent

**Product code**

RP13.11: Pendant-mounted luminaire - UP/DOWN - Ø234 - UGR < 19 - White-Champagne/White Transparent

Technical description

Direct and indirect lighting luminaire - pendant installation. LED source with high colour rendering index - lower component with controlled luminance emission $L < 3000 \text{ cd/m}^2$ - $UGR < 19$ - ideal for environments with video screen use. PMMA emission unit made up of a transparent PMMA prismatic reflector in combination with the flow recovery unit and diffuser screen - an internal polycarbonate cover visually defines the optics unit. Indirect light with diffused emission - PMMA screen with superficial texture. External structure of the light unit with double element in machined aluminium - finished with an even or combined painting. The practical bayonet coupling system allows for the two sections to be separated to perform all the operations prior to hanging. The upper part of the light unit is set up to be adjusted lengthwise, wired and to block the suspension cables/accessory power supply unit provided that is essential for completing the product. Two dimmable DALI power supplies are included in the base (to be ordered separately) that allow the Luce UP and Luce DOWN to be used separately.

Installation

Pendant installation with accessory base unit to be ordered separately.

Colour

White-Champagne/White Transparent (I1)

Weight (Kg)

1.84

Mounting

ceiling pendant


Wiring

Driver integrated into the accessory base unit - cabling terminal board and safety cable clamp positioned in the upper section of the structure.

Complies with EN60598-1 and pertinent regulations

**Technical data**


| | | | |
|--|-------|---------------------------------------|--------|
| lm system: | 4832 | Colour temperature [K]: | 3000 |
| W system: | 36 | MacAdam Step: | 2 |
| lm source: | 5140 | Lamp code: | LED |
| W source: | 36 | Number of lamps for optical assembly: | 1 |
| Luminous efficiency (lm/W, real value): | 134.2 | ZVEI Code: | LED |
| lm in emergency mode: | - | Number of optical assemblies: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 2528 | LED current [mA]: | 550 |
| Light Output Ratio (L.O.R.) [%]: | 94 | Control: | DALI-2 |
| CRI (minimum): | 90 | | |

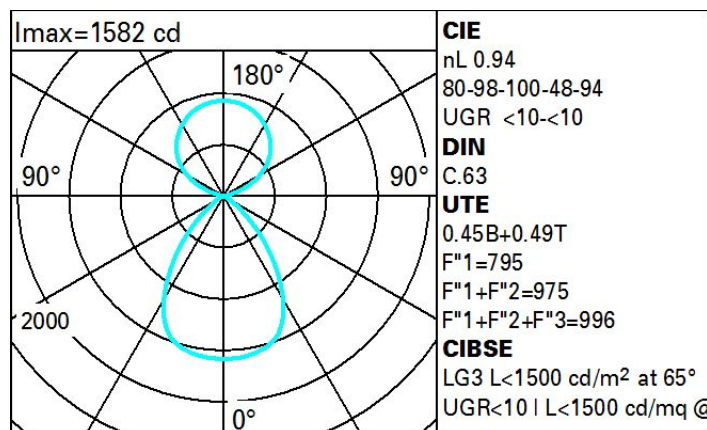Polar

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 58 | 51 | 46 | 42 | 45 | 41 | 36 | 28 | 63 |
| 1.0 | 63 | 56 | 51 | 48 | 49 | 46 | 40 | 31 | 70 |
| 1.5 | 70 | 64 | 60 | 57 | 56 | 53 | 46 | 35 | 79 |
| 2.0 | 74 | 69 | 66 | 63 | 60 | 58 | 50 | 38 | 85 |
| 2.5 | 76 | 72 | 70 | 67 | 63 | 61 | 53 | 40 | 89 |
| 3.0 | 78 | 75 | 72 | 70 | 65 | 63 | 54 | 41 | 91 |
| 4.0 | 80 | 77 | 75 | 73 | 67 | 65 | 56 | 42 | 94 |
| 5.0 | 81 | 79 | 77 | 75 | 68 | 67 | 57 | 43 | 95 |

Luminance curve limit

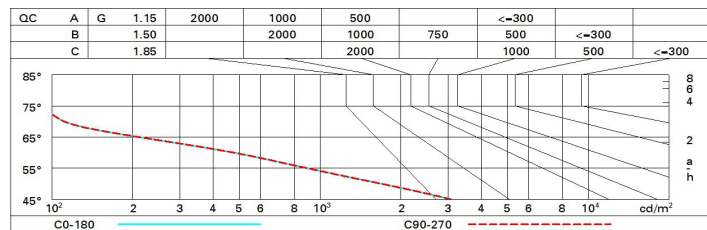

UGR diagram

| Corrected UGR values (at 5140 lm bare lamp luminous flux) | | | | | | | | | | | |
|---|------|---------------------|-----|-----|-----|------|-------------------|-----|-----|-----|------|
| Reflect.: ceiling/cav walls work pl. Room dim x y | | viewed crosswise | | | | | viewed endwise | | | | |
| 2H | 2H | 8.5 | 9.0 | 9.4 | 9.9 | 11.1 | 8.5 | 9.0 | 9.4 | 9.9 | 11.1 |
| | 3H | 8.2 | 8.7 | 9.2 | 9.7 | 10.9 | 8.3 | 8.8 | 9.2 | 9.7 | 10.9 |
| | 4H | 8.1 | 8.6 | 9.1 | 9.5 | 10.7 | 8.2 | 8.6 | 9.1 | 9.5 | 10.8 |
| | 6H | 8.0 | 8.4 | 9.0 | 9.4 | 10.6 | 8.0 | 8.4 | 9.0 | 9.4 | 10.6 |
| | 8H | 7.9 | 8.3 | 8.9 | 9.3 | 10.5 | 8.0 | 8.3 | 8.9 | 9.3 | 10.6 |
| | 12H | 7.9 | 8.2 | 8.9 | 9.2 | 10.5 | 7.9 | 8.3 | 8.9 | 9.2 | 10.5 |
| 4H | 2H | 8.2 | 8.6 | 9.1 | 9.5 | 10.8 | 8.1 | 8.6 | 9.1 | 9.5 | 10.7 |
| | 3H | 7.9 | 8.3 | 8.9 | 9.3 | 10.5 | 7.9 | 8.3 | 8.9 | 9.3 | 10.5 |
| | 4H | 7.8 | 8.1 | 8.8 | 9.1 | 10.4 | 7.8 | 8.1 | 8.8 | 9.1 | 10.4 |
| | 6H | 7.7 | 8.0 | 8.7 | 9.0 | 10.3 | 7.7 | 7.9 | 8.7 | 8.9 | 10.3 |
| | 8H | 7.6 | 7.9 | 8.6 | 8.9 | 10.2 | 7.6 | 7.9 | 8.6 | 8.9 | 10.2 |
| | 12H | 7.5 | 7.8 | 8.6 | 8.8 | 10.1 | 7.5 | 7.8 | 8.6 | 8.8 | 10.1 |
| 8H | 4H | 7.6 | 7.9 | 8.6 | 8.9 | 10.2 | 7.6 | 7.9 | 8.6 | 8.9 | 10.2 |
| | 6H | 7.5 | 7.7 | 8.5 | 8.7 | 10.1 | 7.5 | 7.7 | 8.5 | 8.7 | 10.1 |
| | 8H | 7.4 | 7.6 | 8.5 | 8.6 | 10.0 | 7.4 | 7.6 | 8.5 | 8.6 | 10.0 |
| | 12H | 7.3 | 7.5 | 8.4 | 8.5 | 9.9 | 7.3 | 7.5 | 8.4 | 8.5 | 9.9 |
| 12H | 4H | 7.5 | 7.8 | 8.6 | 8.8 | 10.1 | 7.5 | 7.8 | 8.6 | 8.8 | 10.1 |
| | 6H | 7.4 | 7.6 | 8.5 | 8.6 | 10.0 | 7.4 | 7.6 | 8.5 | 8.6 | 10.0 |
| | 8H | 7.3 | 7.5 | 8.4 | 8.5 | 9.9 | 7.3 | 7.5 | 8.4 | 8.5 | 9.9 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | 1.0H | 2.3 / -4.7 | | | | | 2.3 / -4.7 | | | | |
| | 1.5H | 4.6 / -8.6 | | | | | 4.6 / -8.6 | | | | |
| | 2.0H | 6.6 / -11.3 | | | | | 6.6 / -11.3 | | | | |