

Last information update: November 2024

Product configuration: RR51

RR51: Dimmable electronic Ø122mm DALI body - Flood optic - Warm White



Product code

RR51: Dimmable electronic Ø122mm DALI body - Flood optic - Warm White

Technical description

Adjustable spotlight with adapter for installation on an electrified track or base. High chromatic yield LED lamp with Warm White (3000K) tone and OptiBeam Lens optic system and Flood optic. Dimmable electronic DALI power supply integrated in product. Luminaire made of die-cast aluminium and thermoplastic material that allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane with mechanical aiming locks. Passive heat dissipation. Spotlight with "Push&Go" system designed to hold up to two flat accessories at the same time. The same system can also be used to apply another external component selected from the directional flaps and anti-glare screen. All internal accessories rotate 360° about the spotlight longitudinal axis.

Installation

Installation on an electrified track or base.

Colour

White (01) | Black (04)

Weight (Kg)

2.13

Mounting

wall surface/ceiling surface

Wiring

Electronic components integrated in product


Complies with EN60598-1 and pertinent regulations




Technical data

| | | | |
|----------------------------------------------------|------|---------------------------------------|---------------------------------|
| lm system: | 2184 | CRI (minimum): | 97 |
| W system: | 29.3 | Colour temperature [K]: | 3000 |
| lm source: | 2800 | MacAdam Step: | 2 |
| W source: | 26 | Life Time LED 1: | > 50,000h - L90 - B10 (Ta 25°C) |
| Luminous efficiency (lm/W, real value): | 74.5 | Lamp code: | LED |
| lm in emergency mode: | - | Number of lamps for optical assembly: | 1 |
| Total light flux at or above an angle of 90° [Lm]: | 0 | ZVEI Code: | LED |
| Light Output Ratio (L.O.R.) [%]: | 78 | Number of optical assemblies: | 1 |
| Beam angle [°]: | 29° | Control: | DALI-2 |

Polar

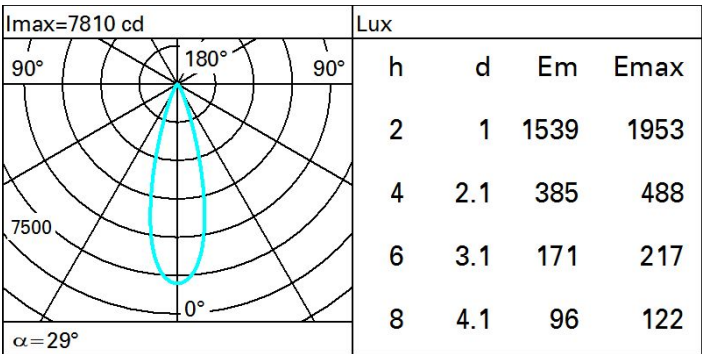

Isolux

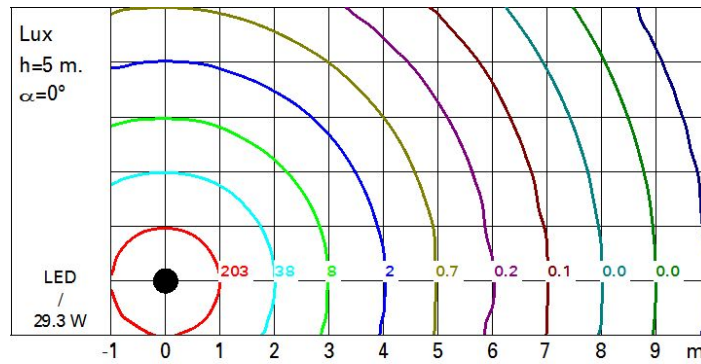

UGR diagram

| Corrected UGR values (at 2800 lm bare lamp luminous flux) | | | | | | | | | | | | |
|-----------------------------------------------------------|-----|------------------|-------------|------|------|------|----------------|------|------|------|------|--|
| Reflect.: | | viewed crosswise | | | | | viewed endwise | | | | | |
| ceiling | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | |
| walls | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | |
| work pl. | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | |
| Room dim | | viewed crosswise | | | | | viewed endwise | | | | | |
| x | y | | | | | | | | | | | |
| 2H | 2H | 10.2 | 12.2 | 10.6 | 12.5 | 12.8 | 10.2 | 12.2 | 10.6 | 12.5 | 12.8 | |
| | 3H | 10.1 | 11.6 | 10.5 | 12.0 | 12.3 | 10.1 | 11.6 | 10.5 | 12.0 | 12.3 | |
| | 4H | 10.0 | 11.3 | 10.4 | 11.7 | 12.0 | 10.0 | 11.4 | 10.4 | 11.7 | 12.0 | |
| | 6H | 10.0 | 11.0 | 10.3 | 11.4 | 11.7 | 10.0 | 11.0 | 10.4 | 11.4 | 11.7 | |
| | 8H | 9.9 | 11.0 | 10.3 | 11.3 | 11.7 | 9.9 | 11.0 | 10.3 | 11.3 | 11.7 | |
| | 12H | 9.9 | 10.9 | 10.3 | 11.3 | 11.6 | 9.9 | 10.9 | 10.3 | 11.3 | 11.6 | |
| 4H | 2H | 10.0 | 11.4 | 10.4 | 11.7 | 12.0 | 10.0 | 11.3 | 10.4 | 11.7 | 12.0 | |
| | 3H | 9.9 | 10.9 | 10.3 | 11.3 | 11.7 | 9.9 | 10.9 | 10.3 | 11.3 | 11.7 | |
| | 4H | 9.8 | 10.8 | 10.2 | 11.2 | 11.6 | 9.8 | 10.8 | 10.2 | 11.2 | 11.6 | |
| | 6H | 9.5 | 11.1 | 10.0 | 11.5 | 12.0 | 9.5 | 11.1 | 10.0 | 11.5 | 12.0 | |
| | 8H | 9.3 | 11.1 | 9.8 | 11.6 | 12.1 | 9.3 | 11.1 | 9.8 | 11.6 | 12.1 | |
| | 12H | 9.2 | 11.1 | 9.7 | 11.6 | 12.1 | 9.2 | 11.1 | 9.7 | 11.6 | 12.1 | |
| 8H | 4H | 9.3 | 11.1 | 9.8 | 11.6 | 12.1 | 9.3 | 11.1 | 9.8 | 11.6 | 12.1 | |
| | 6H | 9.2 | 10.9 | 9.7 | 11.4 | 12.0 | 9.2 | 10.9 | 9.7 | 11.4 | 12.0 | |
| | 8H | 9.2 | 10.7 | 9.7 | 11.2 | 11.8 | 9.2 | 10.7 | 9.7 | 11.2 | 11.8 | |
| | 12H | 9.3 | 10.4 | 9.8 | 10.9 | 11.4 | 9.3 | 10.4 | 9.8 | 10.9 | 11.4 | |
| 12H | 4H | 9.2 | 11.1 | 9.7 | 11.6 | 12.1 | 9.2 | 11.1 | 9.7 | 11.6 | 12.1 | |
| | 6H | 9.2 | 10.7 | 9.7 | 11.2 | 11.8 | 9.2 | 10.7 | 9.7 | 11.2 | 11.8 | |
| | 8H | 9.3 | 10.4 | 9.8 | 10.9 | 11.4 | 9.3 | 10.4 | 9.8 | 10.9 | 11.4 | |
| Variations with the observer position at spacing: | | | | | | | | | | | | |
| S = | | 1.0H | 4.1 / -7.9 | | | | 4.1 / -7.9 | | | | | |
| | | 1.5H | 6.8 / -10.3 | | | | 6.8 / -10.3 | | | | | |
| | | 2.0H | 8.8 / -12.4 | | | | 8.8 / -12.4 | | | | | |