

Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	67	63	60	66	62	62	58	67
1.0	77	72	68	65	71	67	67	63	73
1.5	82	79	75	73	77	75	74	70	81
2.0	86	83	80	78	82	79	78	75	87
2.5	88	85	84	82	84	82	81	78	90
3.0	89	87	86	84	86	85	83	81	93
4.0	91	89	88	87	88	87	85	83	95
5.0	91	90	89	88	89	88	86	84	96

Curva limite di luminanza

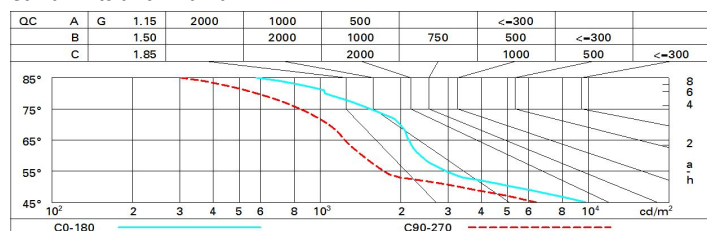


Diagramma UGR

Corrected UGR values (at 4750 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	10.6	17.3	10.9	17.6	17.8	15.9	10.6	10.1	10.9	17.1
	3H	10.7	17.3	17.0	17.6	17.9	15.8	10.5	10.1	10.8	17.0
	4H	10.7	17.3	17.0	17.6	17.9	15.7	10.4	10.1	10.7	17.0
	6H	10.7	17.3	17.0	17.6	17.9	15.7	10.3	10.0	10.6	16.9
	8H	10.7	17.2	17.0	17.6	17.9	15.6	10.2	10.0	10.5	16.9
	12H	10.7	17.2	17.0	17.5	17.9	15.6	10.1	10.0	10.5	16.8
4H	2H	10.4	17.1	10.8	17.4	17.7	15.9	10.5	10.2	10.8	17.2
	3H	10.6	17.1	10.9	17.4	17.8	15.9	10.4	10.3	10.8	17.1
	4H	10.6	17.1	17.0	17.5	17.9	15.9	10.3	10.3	10.7	17.1
	6H	10.7	17.1	17.1	17.5	17.9	15.8	10.2	10.3	10.6	17.1
	8H	10.6	17.0	17.1	17.4	17.9	15.8	10.2	10.2	10.6	17.0
	12H	10.6	17.0	17.1	17.4	17.9	15.8	10.1	10.2	10.5	17.0
8H	4H	10.5	16.9	17.0	17.3	17.8	15.9	10.3	10.3	10.7	17.1
	6H	10.6	16.9	17.1	17.4	17.8	15.9	10.2	10.3	10.6	17.1
	8H	10.6	16.9	17.1	17.3	17.8	15.8	10.1	10.3	10.6	17.1
	12H	10.6	16.8	17.1	17.3	17.8	15.8	10.1	10.3	10.5	17.1
12H	4H	10.5	16.8	17.0	17.3	17.7	15.9	10.2	10.3	10.6	17.1
	6H	10.6	16.8	17.0	17.3	17.8	15.8	10.1	10.3	10.6	17.1
	8H	10.6	16.8	17.1	17.3	17.8	15.8	10.1	10.3	10.6	17.1
Variations with the observer position at spacing:											
S =	1.0H	2.8 / -4.0					3.0 / -4.4				
	1.5H	5.3 / -4.7					5.3 / -5.0				
	2.0H	7.2 / -5.1					7.2 / -5.2				