

Last information update: February 2025

Product configuration: RU37.12+RW69.04

RU37.12: Linear module - recessed Minimal Down - for MMO/Space/Wall Washer versions - L=3576 - Aluminium
RW69.04: Plate with LED - Downlight - Wall Washer - HO - DALI - L=1192 - 19W 1618.4lm - 3500K - CRI 90 - Black



Product code

RU37.12: Linear module - recessed Minimal Down - for MMO/Space/Wall Washer versions - L=3576 - Aluminium

Technical description

Recessed Minimal (Frameless) version with extruded aluminium profile installed flush with ceiling. Designed for use with an LED plate in MMO, Space and Wall Washer versions.

Installation

Can be recess-mounted.


Colour

Aluminium (12)

Wiring

Designed to house the LED modules that can be used by the system.

Complies with EN60598-1 and pertinent regulations



Product code

RW69.04: Plate with LED - Downlight - Wall Washer - HO - DALI - L=1192 - 19W 1618.4lm - 3500K - CRI 90 - Black

Technical description

3500K LED plate with direct (Down) light emission. Wall Washer High Output (HO) Wall Washer version to be used with suitable profiles to be ordered separately. The module optic and structural fittings allow high luminous flux and system efficiency values. DALI dimmable power supply integrated in the luminaire. Extruded aluminium heat sink formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. "Halogen Free" electric cables.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour

Black (04)

Weight (Kg)

1.89

Wiring

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI power supply.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	4850	Colour temperature [K]:	3500
W system:	56.9	MacAdam Step:	3
lm source:	8660	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	50	Lamp code:	LED
Luminous efficiency (lm/W, real value):	85.2	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	56	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2

Polar

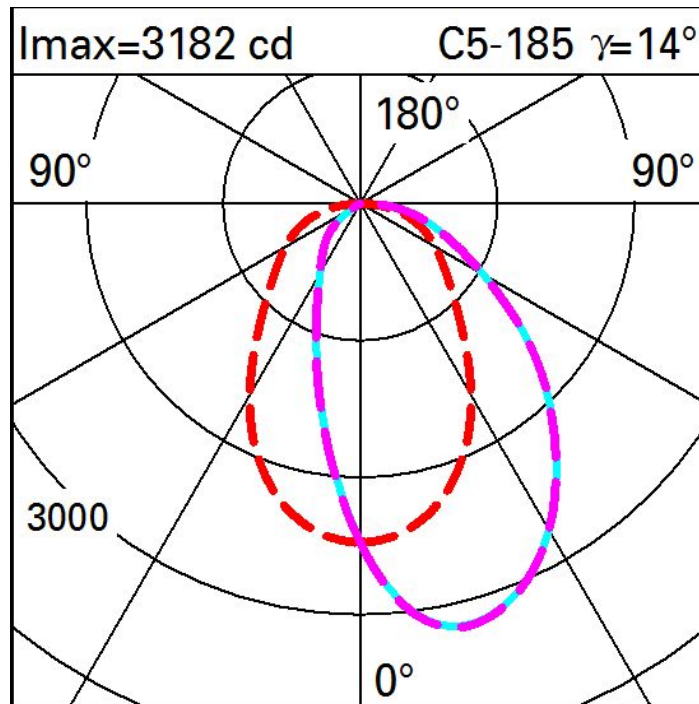

Illuminances

Lux													Wall distance = 1m	
3														
	15	31	69	165	390	592	390	165	69	31	15			
2	23	44	90	212	493	690	493	212	90	44	23			
	26	46	95	210	367	457	367	210	95	46	26			
1	26	46	88	160	237	275	237	160	88	46	26			
	25	44	74	114	149	166	149	114	74	44	25			
0														
	m	-2	-1	0	1	2	3							