

Last information update: May 2025

Product configuration: RU34.12+RW69.04

RU34.12: Linear module - recessed Minimal Down - for MMO/Space/Wall Washer versions - L=2384 - Aluminium

RW69.04: Plate with LED - Downlight - Wall Washer - HO - DALI - L=1192 - 19W 1618.4lm - 3500K - CRI 90 - Black

**Product code**

RU34.12: Linear module - recessed Minimal Down - for MMO/Space/Wall Washer versions - L=2384 - Aluminium

Technical description

Recessed Minimal (Frameless) version with extruded aluminium profile installed flush with ceiling. Designed for use with an LED plate in MMO, Space and Wall Washer versions.

Installation

Can be recess-mounted.

Colour

Aluminium (12)

Wiring

Designed to house the LED modules that can be used by the system.

Complies with EN60598-1 and pertinent regulations

**Product code**

RW69.04: Plate with LED - Downlight - Wall Washer - HO - DALI - L=1192 - 19W 1618.4lm - 3500K - CRI 90 - Black

Technical description

3500K LED plate with direct (Down) light emission. Wall Washer High Output (HO) Wall Washer version to be used with suitable profiles to be ordered separately. The module optic and structural fittings allow high luminous flux and system efficiency values. DALI dimmable power supply integrated in the luminaire. Extruded aluminium heat sink formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. "Halogen Free" electric cables.

Installation

Module insertion on profiles facilitated by a quick coupling system.

Colour
Black (04)

Weight (Kg)
1.89

Wiring

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI power supply.

Complies with EN60598-1 and pertinent regulations




IP20

**Technical data**

lm system:	3231	Colour temperature [K]:	3500
W system:	37.9	MacAdam Step:	3
lm source:	5770	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	33	Lamp code:	LED
Luminous efficiency (lm/W, real value):	85.3	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	56	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2

Polar

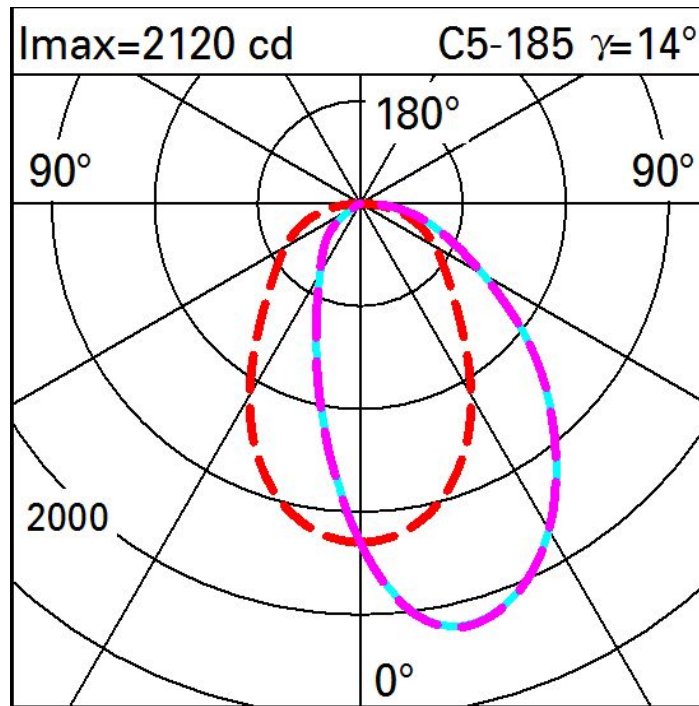

Illuminances

Lux													Wall distance = 1m	
3														
	10	21	46	110	260	395	260	110	46	21	10			
2	16	29	60	142	329	460	329	142	60	29	16			
	17	31	63	140	245	305	245	140	63	31	17			
1	17	31	58	107	158	183	158	107	58	31	17			
	17	29	49	76	99	110	99	76	49	29	17			
0														
	m	-2	-1	0	1	2	3							