

Last information update: February 2025

**Product configuration: RU32.12+RW69.04**

RU32.12: Linear module - recessed Minimal Down - for MMO/Space/Wall Washer versions - L=1192 - Aluminium  
RW69.04: Plate with LED - Downlight - Wall Washer - HO - DALI - L=1192 - 19W 1618.4lm - 3500K - CRI 90 - Black



**Product code**

RU32.12: Linear module - recessed Minimal Down - for MMO/Space/Wall Washer versions - L=1192 - Aluminium

**Technical description**

Recessed Minimal (Frameless) version with extruded aluminium profile installed flush with ceiling. Designed for use with an LED plate in MMO, Space and Wall Washer versions.

**Installation**

Can be recess-mounted.


**Colour**

Aluminium (12)

**Wiring**

Designed to house the LED modules that can be used by the system.

Complies with EN60598-1 and pertinent regulations



**Product code**

RW69.04: Plate with LED - Downlight - Wall Washer - HO - DALI - L=1192 - 19W 1618.4lm - 3500K - CRI 90 - Black

**Technical description**

3500K LED plate with direct (Down) light emission. Wall Washer High Output (HO) Wall Washer version to be used with suitable profiles to be ordered separately. The module optic and structural fittings allow high luminous flux and system efficiency values. DALI dimmable power supply integrated in the luminaire. Extruded aluminium heat sink formally designed to house the exclusive asymmetric optic system that generates an even and effective wall washer emission. Linear PMMA screen combined with a special acrylic film; anodised aluminium main beam reflector and side reflectors. "Halogen Free" electric cables.

**Installation**

Module insertion on profiles facilitated by a quick coupling system.

**Colour**  
Black (04)

**Weight (Kg)**  
1.89

**Wiring**

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI power supply.


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	1618	Colour temperature [K]:	3500
W system:	19	MacAdam Step:	3
lm source:	2890	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	17	Lamp code:	LED
Luminous efficiency (lm/W, real value):	85.2	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	56	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2

Polar

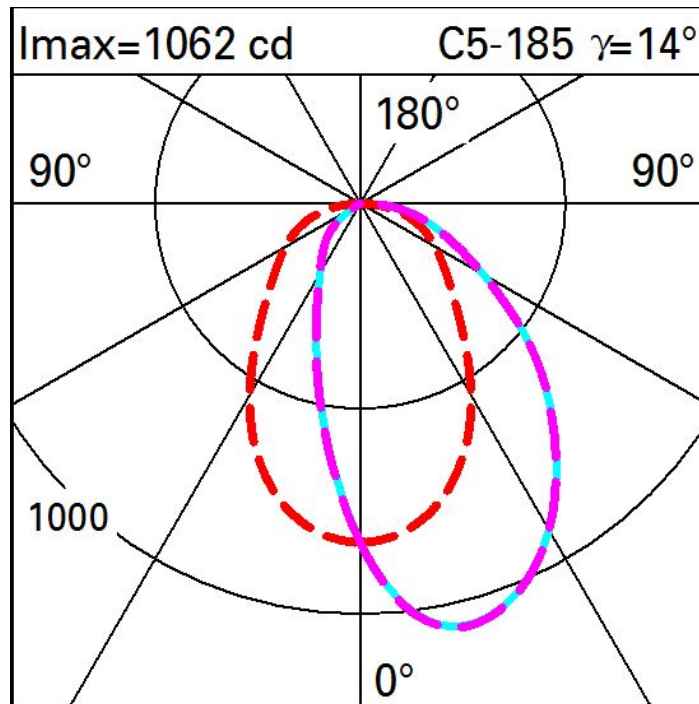

Illuminances

