


Last information update: February 2025

Product configuration: RY20.01+RU58.38

RY20.01: Surface/pendant-mounted corner module - Down - UGR<19 - LO - DALI - 8.5W 960lm - 3500K - White
RU58.38: Single Microprismatic screen L=1200 (UGR) - Opaline

**Product code**

RY20.01: Surface/pendant-mounted corner module - Down - UGR<19 - LO - DALI - 8.5W 960lm - 3500K - White

Technical description

Minimal surface/pendant-mounted corner element; including a 3500K LED module in a Low Output (LO) version with UGR<19 controlled luminance ($L \leq 3000 \text{cd/m}^2$) ideal for environments with video monitors. Integrated DALI dimmable power supply with pass-through wiring for continuous lines. The module optic and structural fittings allow high luminous flux and system efficiency values. Extruded aluminium heat sink and "Halogen Free" electric cables. Element with light not including a screen but compatible with both roll and single MPO screens.

Installation

Surface or pendant-mounted

Colour

White (01)

Wiring

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI power supply.

Complies with EN60598-1 and pertinent regulations

**Accessory code**

RU58.38: Single Microprismatic screen L=1200 (UGR) - Opaline

Technical description

Flexible single Microprismatic screen for composition L=1200 - UGR< 19 optic -

Installation

snapped on via special springs located in the profile

Colour

Opaline (38)

Notes


TPa rated

Complies with EN60598-1 and pertinent regulations

Technical data

Im system:	960	Colour temperature [K]:	3500
W system:	8.5	MacAdam Step:	3
Im source:	750	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	3.5	Lamp code:	LED
Luminous efficiency (Im/W, real value):	112.9	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	2
Light Output Ratio (L.O.R.) [%]:	64	Control:	DALI-2
CRI (minimum):	80		


Polar

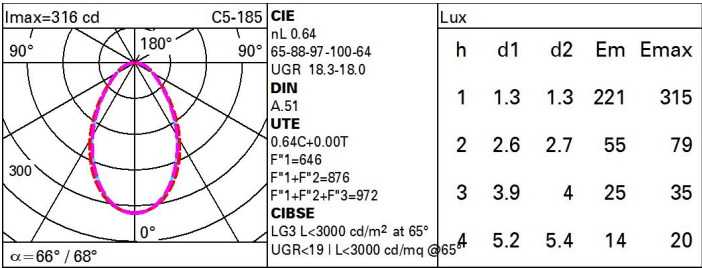

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	47	42	38	35	41	37	37	33	52
1.0	51	46	42	39	45	42	41	38	59
1.5	57	52	49	47	51	49	48	45	70
2.0	60	57	54	52	55	53	52	49	77
2.5	62	59	57	55	58	56	55	52	81
3.0	63	61	59	57	60	58	57	54	85
4.0	65	63	61	60	62	60	59	57	88
5.0	65	64	63	62	63	62	60	58	91

Luminance curve limit

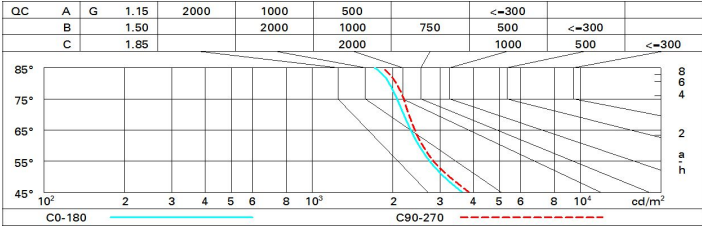

UGR diagram

Corrected UGR values (at 750 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	15.1	16.1	15.4	16.4	16.6	15.4	16.4	15.7	16.6	16.9	16.9
	3H	16.3	17.2	16.6	17.5	17.8	15.6	16.5	16.0	16.8	17.1	17.1
	4H	16.8	17.6	17.1	17.9	18.2	15.7	16.6	16.1	16.9	17.2	17.2
	6H	17.2	18.0	17.6	18.3	18.6	15.7	16.5	16.1	16.9	17.2	17.2
	8H	17.3	18.1	17.7	18.4	18.8	15.7	16.5	16.1	16.8	17.2	17.2
	12H	17.4	18.2	17.8	18.5	18.9	15.7	16.4	16.1	16.8	17.2	17.2
4H	2H	15.5	16.4	15.9	16.7	17.0	17.0	17.9	17.4	18.2	18.5	18.5
	3H	16.9	17.6	17.3	18.0	18.3	17.5	18.3	17.9	18.6	19.0	19.0
	4H	17.5	18.2	17.9	18.5	18.9	17.8	18.4	18.2	18.8	19.2	19.2
	6H	18.1	18.7	18.5	19.1	19.5	17.9	18.5	18.4	18.9	19.3	19.3
	8H	18.3	18.8	18.7	19.2	19.7	18.0	18.5	18.4	18.9	19.4	19.4
	12H	18.4	18.9	18.9	19.4	19.8	18.0	18.5	18.4	18.9	19.4	19.4
8H	4H	17.8	18.3	18.2	18.7	19.2	18.6	19.1	19.0	19.5	19.9	19.9
	6H	18.5	18.9	19.0	19.4	19.9	18.9	19.3	19.4	19.8	20.3	20.3
	8H	18.8	19.2	19.3	19.6	20.1	19.0	19.4	19.5	19.9	20.4	20.4
	12H	19.0	19.3	19.5	19.8	20.4	19.1	19.5	19.6	20.0	20.5	20.5
12H	4H	17.8	18.3	18.3	18.7	19.2	18.7	19.2	19.2	19.6	20.1	20.1
	6H	18.6	18.9	19.0	19.4	19.9	19.1	19.5	19.6	19.9	20.5	20.5
	8H	18.9	19.2	19.4	19.7	20.2	19.3	19.6	19.8	20.1	20.6	20.6
Variations with the observer position at spacing:												
S =		1.0H	0.2 / -0.3		0.2 / -0.3							
		1.5H	0.3 / -0.6		0.3 / -0.6							
		2.0H	0.7 / -0.7		0.8 / -0.7							