



SF50: 27 surface Full Remote - RGBW (W=3000K) - 48 Vdc - L=1,216mm - Spot optic



Im system:	1035	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
W system:	16.2	Life Time LED 2:	100,000h - L80 - B10 (Ta 40°C)
Im source:	1670	Voltage [Vin]:	48
W source:	13	Lamp code:	LED
Luminous efficiency (lm/W, real value):	63.9	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	62	Intervallo temperatura ambiente:	from -30°C to 50°C.
Beam angle [°]:	11°	LED current [mA]:	45
CRI (typical):	82	Control:	PWM
Colour temperature [K]:	RGBW - 3000K		

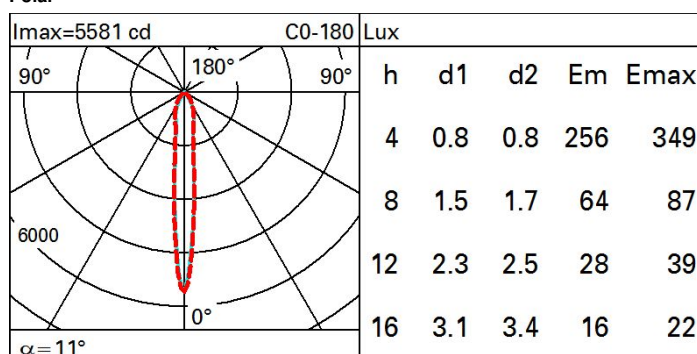

Isolux

