


Last information update: January 2025

**Product configuration: UE03**

UE03: Pole-mounted system - STCy0.5 optic - Neutral White - Ta 50°C

**Product code**

UE03: Pole-mounted system - STCy0.5 optic - Neutral White - Ta 50°C

**Technical description**

Outdoor luminaire with a direct light street optic with a maximum ambient temperature of 50°C. Optical assembly made of die-cast aluminium, with dual phosphorous - chromium plating of the base metal, passivation at 120°C, RAL 9007 grey liquid paint, curing at 150°C. A sodium - calcium closing glass with silicone seal for the frame closes the LED assembly, which is fixed to the component-holder box by 4 screws. The optical assembly is fixed to the arm by 4 securing screws with an anti-loosening device. A 60 Shore silicone gasket located between the two parts guarantees a high IP66 level. Complete with circuit fitted with Neutral White monochrome LEDs. Replaceable LED unit. The light flow emitted in the upper hemisphere of the system in the horizontal position is null (in conformity with the strictest standards for the prevention of light pollution). Power supply, connected using quick-couplings and removed using clips. DALI electronic power supply. Wiring and optical compartment can be opened with everyday tools. All external screws are made of stainless steel.

**Installation**

The projector can be installed on ø76/102mm diameters via steel arms. For ø60mm to ø89mm diameters a reducer can be used.

**Colour**

White / white (11) | Grey/White (B5) | Black/white (F2) | Rust  
Brown / White (G3)

**Weight (Kg)**

5.8


**Mounting**

pole arm|pole-top side entry|pole-top


Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	3590	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W system:	24.2	Lamp code:	LED
Im source:	-	Number of lamps for optical assembly:	1
W source:	-	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	148.3	Number of optical assemblies:	1
Im in emergency mode:	-	Intervallo temperatura ambiente:	from -40°C to 50°C.
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	100	Inrush current:	32 A / - µs
CRI (minimum):	70	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 6 luminaires B16A: 10 luminaires C10A: 10 luminaires C16A: 17 luminaires
Colour temperature [K]:	4000	Minimum dimming %:	5
MacAdam Step:	3	Overvoltage protection:	10kV Common mode & 6kV Differential mode
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)	Control:	Midnight preset/DALI NFC

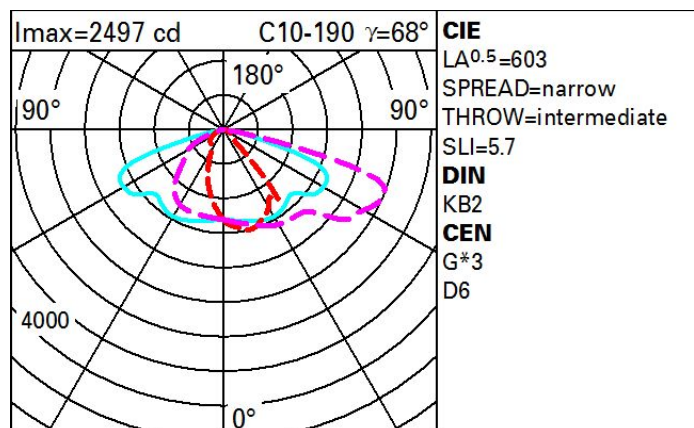**Polar**

### Isolux

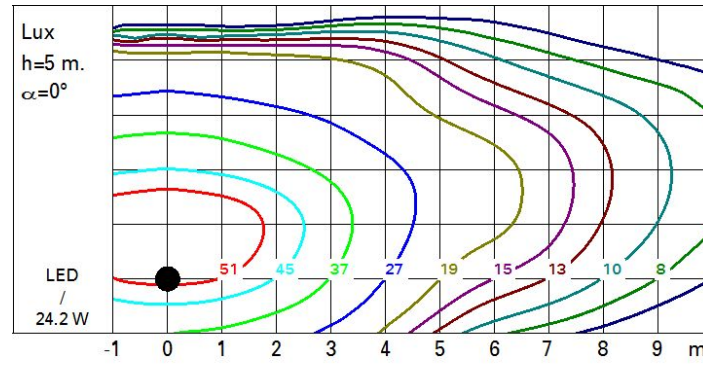

### Utilisation factors

