

## Agorà


**Design Jean-Michel Wilmotte**

iGuzzini

Last information update: March 2025

**Product configuration: UH34+Ta50°C**

UH34: Spotlight with bracket (to be ordered separately) - Neutral White LED - Remote Ballast - Wall Washer optic - Class I



## Product code

UH34: Spotlight with bracket (to be ordered separately) - Neutral White LED - Remote Ballast - Wall Washer optic - Class I

### Technical description

**Spotlight description:**  
Spotlight designed to use LED lamps and a Wall Washer optic. Consists of a die-cast aluminium optical assembly, steel brackets (both a bracket for the spotlight and a bracket for handle/pole application) and a clear, tempered sodium-calcium safety glass cover. It is fitted with an A2 stainless steel cable gland and a 2x1mm2 section 05RN-F cable. The optical assembly can be adjusted on a horizontal plane at an angle between  $-50^{\circ} / +90^{\circ}$ . Agorà is fitted with a graduated scale and mechanical locking device for positioning. The Opti Beam Lens optical system comes complete with a Neutral White monochrome LED circuit. The electronic DALI ballast is remote and can be ordered separately to allow the spotlights to be connected in series. The spotlight is fitted with a protection system that in the event of a fault allows all the other products in the same circuit to operate normally. Class I, IP67 rated power supply units must be used (all the necessary information is included in the instruction sheet). Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

## Installation

Installation  
Floor-installed or wall-mounted with a bracket or handle (special bracket).

**Colour**

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

## Weight (Kg)

3.6

## Wiring

A2 stainless steel cable gland.


Complies with EN60598-1 and pertinent regulations



## Technical data

Im system:	4340	MacAdam Step:	3
W system:	53.6	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	7000	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W source:	44	Lamp code:	LED
Luminous efficiency (lm/W, real value):	81	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	62	Intervallo temperatura ambiente:	from -30°C to 50°C.
CRI (minimum):	80	Control:	DALI-2
Colour temperature [K]:	4000		

Polar

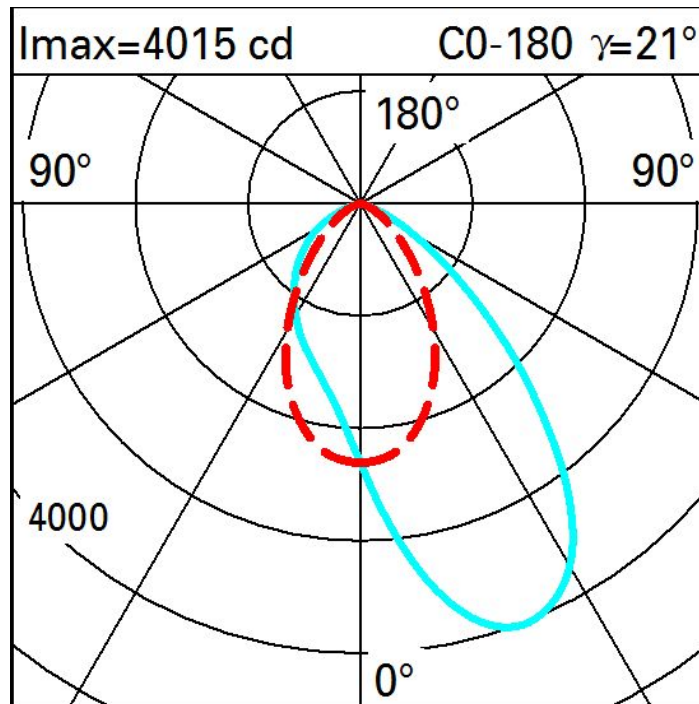

Illuminances

Lux													Wall distance = 1m	
3														
	0.1	0.5	4	22	98	200	98	22	4	0.5	0.1			
2	3	9	29	107	359	640	359	107	29	9	3			
	7	19	53	165	412	597	412	165	53	19	7			
1	11	25	63	154	293	371	293	154	63	25	11			
	14	30	62	118	185	217	185	118	62	30	14			
0														
	m	-2	-1	0	1	2	3							