



Last information update: March 2025

**Product configuration: VFZ4.83**

VFZ4.83: Recessed with 5 cells - WideFlood optic - Tunable Warm - 13.2W 686lm - Tunable warm - CRI 90 - Black Transparent

**Product code**

VFZ4.83: Recessed with 5 cells - WideFlood optic - Tunable Warm - 13.2W 686lm - Tunable warm - CRI 90 - Black Transparent

**Technical description**

Rectangular 5 optic element recessed miniaturised luminaire. LED lamps with different colour temperatures and warm tones that allow them to be modulated. This variation is achieved by mixing the emission of 5 x 2000K high CRI LEDs and 5 x 3500K high CRI LEDs. Every optic element includes a pair of LEDs that when rotated by 72°, allow a perfect mixture of emissions to be created at ground level, even between products of different sizes. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition - wideflood beam - optics are integrated in a set-back position in the black anti-glare screen. The structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with an integrated power supply system that, without using additional components, allows the colour temperature to be changed by simply pressing a single button. A programmable setup with an intuitive, easy-to-use touch screen can be obtained using the X479 code with the M630 power supply unit. Other configurable check systems are available, too, including app-operated ones for remote devices.

**Installation**

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141.

**Colour**

Black Transparent (83)

**Weight (Kg)**

0.29

**Mounting**

wall recessed|ceiling recessed

**Wiring**

Control gear units included. Different management systems are available with a separate code. For technical details, properties and connection procedures see the instruction sheet.

Complies with EN60598-1 and pertinent regulations




IP20

IP23

On the visible part of the product once installed

**Technical data**


lm system:	735	MacAdam Step:	3
W system:	13.2	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
lm source:	980	Lamp code:	LED
W source:	9.4	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	55.7	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	75	Inrush current:	29 A / 153 µs
Beam angle [°]:	42°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 32 luminaires B16A: 51 luminaires C10A: 53 luminaires C16A: 86 luminaires
CRI (minimum):	90	Minimum dimming %:	1
CRI (typical):	92	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	Tunable warm	Control:	DALI-2

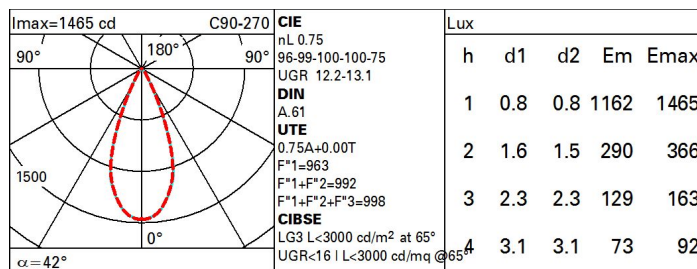**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	67	63	60	58	62	60	59	57	76
1.0	70	66	64	62	65	63	63	60	81
1.5	73	71	69	67	70	68	68	65	87
2.0	76	74	72	71	73	72	71	69	91
2.5	77	76	75	74	75	74	73	71	94
3.0	78	77	76	76	76	75	74	72	97
4.0	79	79	78	77	77	77	76	74	98
5.0	80	79	79	78	78	78	76	74	99

# Luminance curve limit

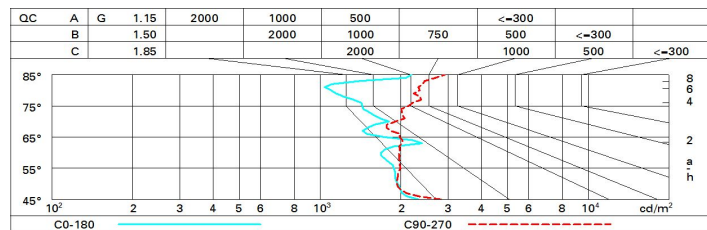

# UGR diagram

Corrected UGR values (at 980 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	12.2	12.7	12.5	13.0	13.2	13.0	13.6	13.3	13.8	14.0
	3H	12.2	12.7	12.5	13.0	13.2	13.0	13.5	13.3	13.7	14.0
	4H	12.2	12.7	12.5	13.0	13.3	12.9	13.4	13.3	13.7	14.0
	6H	12.2	12.6	12.6	12.9	13.3	12.9	13.3	13.2	13.6	13.9
	8H	12.2	12.6	12.5	12.9	13.2	12.8	13.2	13.2	13.6	13.9
	12H	12.2	12.6	12.6	12.9	13.3	12.8	13.2	13.2	13.5	13.9
4H	2H	12.1	12.6	12.5	12.9	13.2	13.1	13.6	13.5	13.9	14.2
	3H	12.2	12.6	12.6	12.9	13.3	13.2	13.6	13.6	13.9	14.3
	4H	12.2	12.6	12.6	13.0	13.3	13.2	13.5	13.6	13.9	14.3
	6H	12.3	12.6	12.7	13.0	13.4	13.2	13.5	13.6	13.9	14.3
	8H	12.2	12.5	12.7	12.9	13.4	13.1	13.4	13.6	13.8	14.3
	12H	12.3	12.5	12.7	13.0	13.4	13.1	13.3	13.5	13.8	14.2
8H	4H	12.2	12.5	12.7	12.9	13.3	13.4	13.7	13.8	14.1	14.5
	6H	12.3	12.5	12.7	12.9	13.4	13.4	13.7	13.9	14.1	14.6
	8H	12.3	12.5	12.7	12.9	13.4	13.4	13.6	13.9	14.1	14.6
	12H	12.3	12.5	12.8	13.0	13.5	13.4	13.6	13.9	14.1	14.6
12H	4H	12.2	12.4	12.6	12.9	13.3	13.4	13.7	13.9	14.1	14.6
	6H	12.2	12.4	12.7	12.9	13.4	13.5	13.7	14.0	14.2	14.7
	8H	12.2	12.4	12.7	12.9	13.4	13.6	13.7	14.1	14.2	14.7
Variations with the observer position at spacing:											
S =	1.0H	3.3 / -4.4					2.5 / -3.5				
	1.5H	5.5 / -4.6					4.7 / -3.7				
	2.0H	7.4 / -5.4					6.6 / -4.1				