


Last information update: May 2024

Product configuration: BH83

BH83: Floodlight - immersion 3 LEDs - 350mA DC

**Product code**BH83: Floodlight - immersion 3 LEDs - 350mA DC **Attention! Code no longer in production****Technical description**

Monochrome floodlight for permanent immersion, IP68 5m. Adjustable about the vertical axis and relative to the horizontal plane. The luminaire is made strictly of AISI 316L stainless steel to guarantee maximum lasting reliability in pools and fountains (fresh water). Clear, transparent 6mm thick tempered closing glass. All screws used are made of stainless steel and the seals are silicone. The product is supplied with a 4m long 2x0,5NS20N power cable. The luminaire technical characteristics conform to EN60598-2-18 standards and particular requirements. IP68 - IK08. The luminaire is complete with 3 Cool White LEDs (3x1,2W). Optical assembly opening is not required for its installation. Insulation class III. The luminaire must be powered by a 350mA DC external driver

Colour

Steel (13)

Mounting

ground surface

Notes

Permanent immersion

Complies with EN60598-1 and pertinent regulations



IK08

IP68


**Technical data**

Im system:	312	CRI (minimum):	70
W system:	3.1	Colour temperature [K]:	6500
Im source:	410	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
W source:	3.1	Lamp code:	LED
Luminous efficiency (Im/W, real value):	100.5	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	76	Intervallo temperatura ambiente:	from -20°C to +35°C.
Beam angle [°]:	28°	LED current [mA]:	350

Polar

Imax=849 cd		Lux			
90°	180°	h	d	Em	Emax
	180°	2	1	161	212
		4	2	40	53
		6	3	18	24
		8	4	10	13
	0°				
α=28°					

Isolux

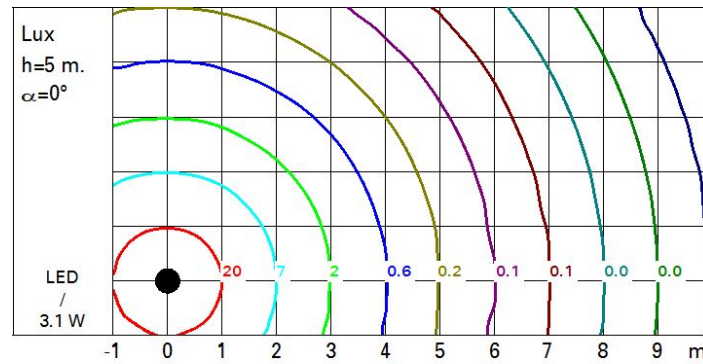

UGR diagram

Corrected UGR values (at 410 lm bare lamp luminous flux)												
Reflect.:		viewed crosswise					viewed endwise					
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim		viewed crosswise					viewed endwise					
x	y											
2H	2H	12.4	13.1	12.7	13.3	13.5	12.4	13.1	12.7	13.3	13.5	
	3H	12.6	13.2	12.9	13.5	13.8	12.4	13.0	12.8	13.3	13.6	
	4H	12.7	13.2	13.0	13.5	13.8	12.4	13.0	12.8	13.3	13.6	
	6H	12.7	13.2	13.0	13.5	13.8	12.4	12.9	12.7	13.2	13.5	
	8H	12.7	13.1	13.0	13.5	13.8	12.4	12.8	12.7	13.2	13.5	
	12H	12.6	13.1	13.0	13.4	13.8	12.3	12.8	12.7	13.1	13.5	
4H	2H	12.4	13.0	12.8	13.3	13.6	12.7	13.2	13.0	13.5	13.8	
	3H	12.7	13.2	13.1	13.5	13.9	12.8	13.3	13.2	13.6	14.0	
	4H	12.8	13.2	13.2	13.6	14.0	12.8	13.2	13.2	13.6	14.0	
	6H	12.9	13.2	13.3	13.6	14.0	12.8	13.2	13.2	13.6	14.0	
	8H	12.9	13.2	13.3	13.6	14.0	12.8	13.1	13.2	13.5	14.0	
	12H	12.8	13.1	13.3	13.6	14.0	12.8	13.1	13.2	13.5	13.9	
8H	4H	12.8	13.1	13.2	13.5	14.0	12.9	13.2	13.3	13.6	14.0	
	6H	12.9	13.1	13.3	13.6	14.1	12.9	13.2	13.4	13.6	14.1	
	8H	12.9	13.1	13.4	13.6	14.1	12.9	13.1	13.4	13.6	14.1	
	12H	12.9	13.1	13.4	13.5	14.1	12.8	13.0	13.3	13.5	14.1	
12H	4H	12.8	13.1	13.2	13.5	13.9	12.8	13.1	13.3	13.6	14.0	
	6H	12.8	13.1	13.3	13.5	14.0	12.9	13.1	13.3	13.6	14.1	
	8H	12.8	13.0	13.3	13.5	14.1	12.9	13.1	13.4	13.5	14.1	
Variations with the observer position at spacing:												
S =		1.0H	2.5 / -2.1				2.5 / -2.1					
		1.5H	4.7 / -3.2				4.7 / -3.2					
		2.0H	6.5 / -3.8				6.5 / -3.8					