


Last information update: May 2024

Product configuration: MS16

MS16: Recessed DALI extractable-control gear



Product code

MS16: Recessed DALI extractable-control gear **Attention! Code no longer in production**

Technical description

Die-cast aluminium and thermoplastic material, recessed luminaire complete with C.O.B technology LED lamp in a 3000K warm white colour tone with high color rendering index. Luminaire with wide flood optic complete with high level light output and uniform distribution OPTIBEAM reflector. The product permits an internal rotation around the 335° vertical axis and the 65° horizontal plane with continuous friction (only on this rotation). Product complete with a DALI driver separate from the luminaire.

Installation

Recessed in false ceilings, with thicknesses starting from between 1 mm and 20 mm, using special steel torsion springs and hinged brackets.

Colour

White (01) | Grey (15)

Weight (Kg)

1.46

Mounting

ceiling recessed

Wiring

product complete with DALI components

Notes

For compliance with the NFC 20-455 standard use an optional filter code MW57 for each optical assembly


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	1973	CRI:	90
W system:	25.1	Colour temperature [K]:	3000
Im source:	2500	MacAdam Step:	2
W source:	22	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	78.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	54°	Control:	DALI


Polar

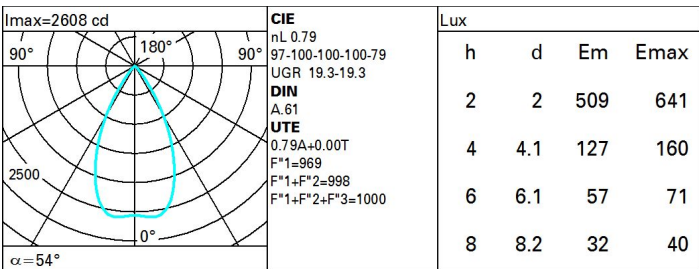

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	64	61	66	63	63	60	76
1.0	74	70	67	66	69	67	67	64	81
1.5	78	75	73	71	74	72	71	69	87
2.0	80	78	77	75	77	76	75	73	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	80	80	78	76	97
4.0	84	83	82	82	81	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Luminance curve limit

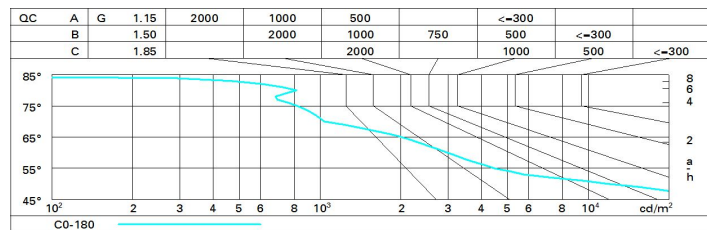

UGR diagram

Corrected UGR values (at 2500 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	19.9	20.5	20.2	20.8	21.0	19.9	20.5	20.2	20.8	21.0
	3H	19.8	20.3	20.1	20.6	20.9	19.8	20.3	20.1	20.6	20.9
	4H	19.7	20.2	20.0	20.5	20.8	19.7	20.2	20.0	20.5	20.8
	6H	19.6	20.1	20.0	20.4	20.8	19.6	20.1	20.0	20.4	20.8
	8H	19.6	20.1	20.0	20.4	20.7	19.6	20.1	20.0	20.4	20.7
	12H	19.6	20.0	19.9	20.3	20.7	19.6	20.0	19.9	20.3	20.7
4H	2H	19.7	20.2	20.0	20.5	20.8	19.7	20.2	20.0	20.5	20.8
	3H	19.6	20.0	19.9	20.3	20.7	19.6	20.0	19.9	20.3	20.7
	4H	19.5	19.9	19.9	20.2	20.6	19.5	19.9	19.9	20.2	20.6
	6H	19.4	19.7	19.8	20.1	20.5	19.4	19.7	19.8	20.1	20.5
	8H	19.3	19.7	19.8	20.1	20.5	19.3	19.7	19.8	20.1	20.5
	12H	19.3	19.6	19.8	20.0	20.5	19.3	19.6	19.8	20.0	20.5
8H	4H	19.3	19.7	19.8	20.1	20.5	19.3	19.7	19.8	20.1	20.5
	6H	19.3	19.5	19.7	20.0	20.4	19.3	19.5	19.7	20.0	20.4
	8H	19.2	19.4	19.7	19.9	20.4	19.2	19.4	19.7	19.9	20.4
	12H	19.2	19.3	19.7	19.8	20.3	19.2	19.3	19.7	19.8	20.3
12H	4H	19.3	19.6	19.8	20.0	20.5	19.3	19.6	19.8	20.0	20.5
	6H	19.2	19.4	19.7	19.9	20.4	19.2	19.4	19.7	19.9	20.4
	8H	19.2	19.3	19.7	19.8	20.3	19.2	19.3	19.7	19.8	20.3
Variations with the observer position at spacing:											
S =		1.0H					5.4 / -14.3				
		1.5H					8.2 / -16.7				
		2.0H					10.2 / -18.9				