

Blade R downlight



Design iGuzzini

iGuzzini

Last information update: October 2024

Product configuration: QS08

QS08: Frame Ø 80 - Wide Flood beam - LED

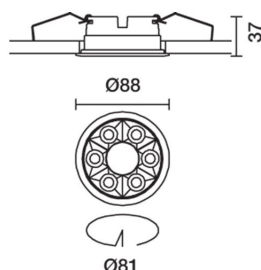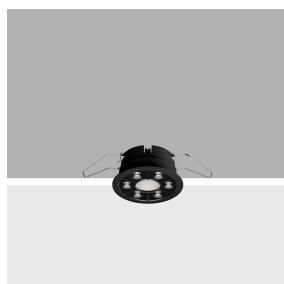

Product code

QS08: Frame Ø 80 - Wide Flood beam - LED **Attention! Code no longer in production**

Technical description

Technical description
Ring luminaire with 6 optical elements for LED lamps - fixed optics. The optic system guarantees a high level of visual comfort and no glare. The body includes a radiant surface made of die-cast aluminium. Version includes a perimeter surface frame. High definition reflectors made of thermoplastic material vacuum-metallised with aluminium vapours, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire. Central cover available with separate item code.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - Ø 80 installation hole.

Colour

White (01) | White/Gold (41) | Black / Black (43) | Black / White (47) | White / burnished chrome (E7)

Weight (Kg)

0.3

Mounting

ceiling recessed

Wiring

On the power supply unit with terminal board included. Available in on/off electronic versions.

Notes

Central cover to complete the luminaire to be ordered with a separate item code - available in a standard finish, it is designed to be painted with a customised finish.

Complies with EN60598-1 and pertinent regulations



IP

IP


On the visible part of
the product once installed



Technical data

Im system:	1134	CRI (minimum):	90
W system:	14.1	Colour temperature [K]:	4000
Im source:	1350	MacAdam Step:	2
W source:	12	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	80.4	Voltage [Vin]:	230
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	84	ZVEI Code:	LED
Beam angle [°]:	58°	Number of optical assemblies:	1


Polar

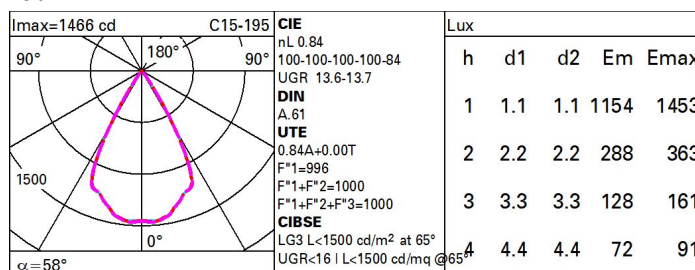

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	76	72	69	67	71	69	68	66	78
1.0	79	76	73	71	75	73	72	69	83
1.5	83	80	78	77	79	78	77	74	89
2.0	86	84	82	81	83	81	80	78	93
2.5	87	86	85	84	85	83	83	80	96
3.0	88	87	86	86	86	85	84	82	98
4.0	89	88	88	87	87	87	85	83	99
5.0	90	89	89	89	88	88	86	84	100

Luminance curve limit

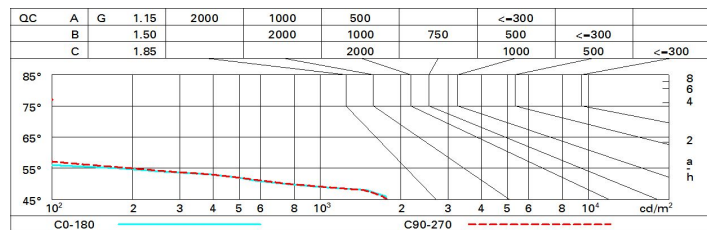

UGR diagram

Corrected UGR values (at 1350 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	14.2	14.8	14.5	15.0	15.3	14.3	14.9	14.6	15.1	15.4
	3H	14.1	14.6	14.4	14.9	15.2	14.2	14.7	14.5	15.0	15.2
	4H	14.0	14.5	14.3	14.8	15.1	14.1	14.6	14.4	14.9	15.2
	6H	13.9	14.4	14.3	14.7	15.0	14.0	14.5	14.4	14.8	15.1
	8H	13.9	14.3	14.3	14.7	15.0	14.0	14.4	14.3	14.7	15.1
	12H	13.9	14.3	14.2	14.6	15.0	13.9	14.4	14.3	14.7	15.1
4H	2H	14.0	14.5	14.3	14.8	15.1	14.1	14.6	14.4	14.9	15.2
	3H	13.9	14.3	14.2	14.6	15.0	13.9	14.4	14.3	14.7	15.1
	4H	13.8	14.1	14.2	14.5	14.9	13.9	14.2	14.3	14.6	15.0
	6H	13.7	14.0	14.1	14.4	14.8	13.8	14.1	14.2	14.5	14.9
	8H	13.6	13.9	14.1	14.3	14.8	13.7	14.0	14.2	14.4	14.9
	12H	13.6	13.9	14.0	14.3	14.7	13.7	13.9	14.1	14.4	14.8
8H	4H	13.6	13.9	14.1	14.3	14.8	13.7	14.0	14.2	14.4	14.9
	6H	13.5	13.8	14.0	14.2	14.7	13.6	13.9	14.1	14.3	14.8
	8H	13.5	13.7	14.0	14.2	14.7	13.6	13.8	14.1	14.2	14.7
	12H	13.4	13.6	13.9	14.1	14.6	13.5	13.7	14.0	14.2	14.7
12H	4H	13.6	13.9	14.0	14.3	14.7	13.7	13.9	14.1	14.4	14.8
	6H	13.5	13.7	14.0	14.2	14.7	13.6	13.8	14.1	14.2	14.7
	8H	13.4	13.6	13.9	14.1	14.6	13.5	13.7	14.0	14.2	14.7
Variations with the observer position at spacing:											
S =	1.0H	6.7 / -28.1					6.7 / -27.6				
	1.5H	9.5 / -30.7					9.5 / -30.1				
	2.0H	11.5 / -30.9					11.5 / -30.3				