


Last information update: May 2024

Product configuration: MP90

MP90: Medium body spotlight - Neutral white - electronic ballast and dimmer - wide flood optic

**Product code**MP90: Medium body spotlight - Neutral white - electronic ballast and dimmer - wide flood optic **Attention! Code no longer in production****Technical description**

Pendant luminaire equipped with a multiphase adapter made of die-cast aluminium and thermoplastic material. The pendant system consists of steel cables L=2000 that provide a simple mechanical anchoring system. Having been rotated and tilted, the luminaire can be locked mechanically in position to ensure efficient light aiming (even during maintenance operations). Luminaire for high output LED lamp with monochrome emission in a neutral white colour tone (4000K). Dimmable electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. Another external component can also be applied, selected from directional flaps and an asymmetric screen. All external accessories rotate 360° about the spotlight longitudinal axis.

Installation

Mounted on an electrified track with a multiphase adapter.

Colour

White (01) | Grey / Black (74)

Weight (Kg)

1.45

Mounting

ceiling pendant


Wiring

The dimmable electronic components are housed in the luminaire.

Complies with EN60598-1 and pertinent regulations

**Technical data**


Im system:	2479	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W system:	23.9	Lamp code:	LED
Im source:	3400	Number of lamps for optical assembly:	1
W source:	20	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	103.7	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	42 A / 100 µs
Light Output Ratio (L.O.R.) [%]:	73	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 21 luminaires B16A: 34 luminaires C10A: 35 luminaires C16A: 57 luminaires
Beam angle [°]:	48°	Minimum dimming %:	0
CRI (minimum):	80	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	4000	Control:	Completo di dimmer
MacAdam Step:	2		

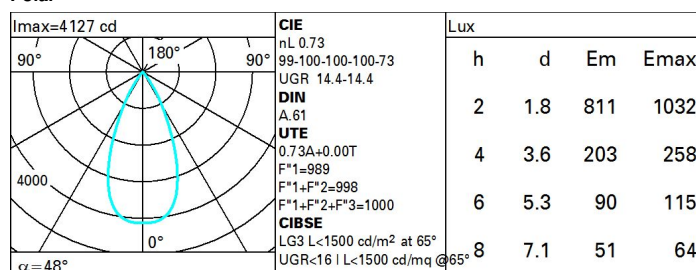Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	62	60	58	62	59	59	57	78
1.0	68	65	63	61	65	63	62	60	82
1.5	72	70	68	66	69	67	66	64	88
2.0	74	73	71	70	71	70	70	68	93
2.5	76	74	73	72	73	72	72	70	95
3.0	77	76	75	74	74	74	73	71	97
4.0	77	77	76	76	76	75	74	72	99
5.0	78	77	77	77	76	76	75	73	100

Luminance curve limit

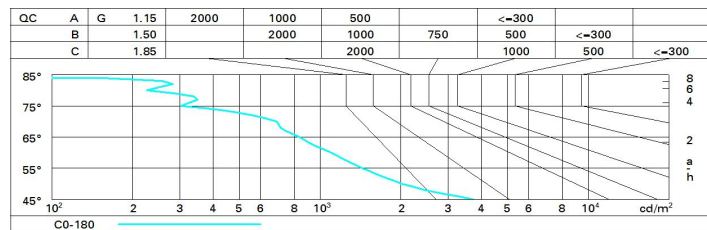

UGR diagram

Corrected UGR values (at 3400 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	15.0	15.5	15.2	15.7	16.0	15.0	15.5	15.2	15.7	16.0
	3H	14.8	15.3	15.1	15.6	15.9	14.8	15.3	15.1	15.6	15.9
	4H	14.8	15.2	15.1	15.5	15.8	14.8	15.2	15.1	15.5	15.8
	6H	14.7	15.1	15.0	15.4	15.8	14.7	15.1	15.0	15.4	15.7
	8H	14.7	15.1	15.0	15.4	15.7	14.6	15.1	15.0	15.4	15.7
	12H	14.6	15.0	15.0	15.3	15.7	14.6	15.0	15.0	15.3	15.7
4H	2H	14.8	15.2	15.1	15.5	15.8	14.8	15.2	15.1	15.5	15.8
	3H	14.6	15.0	15.0	15.4	15.7	14.6	15.0	15.0	15.4	15.7
	4H	14.5	14.9	14.9	15.2	15.6	14.5	14.9	14.9	15.2	15.6
	6H	14.4	14.8	14.9	15.1	15.6	14.4	14.8	14.9	15.1	15.6
	8H	14.4	14.7	14.8	15.1	15.5	14.4	14.7	14.8	15.1	15.5
	12H	14.3	14.6	14.8	15.0	15.5	14.3	14.6	14.8	15.0	15.5
8H	4H	14.4	14.7	14.8	15.1	15.5	14.4	14.7	14.8	15.1	15.5
	6H	14.3	14.5	14.8	15.0	15.5	14.3	14.5	14.8	15.0	15.5
	8H	14.3	14.5	14.7	14.9	15.4	14.3	14.5	14.7	14.9	15.4
	12H	14.2	14.4	14.7	14.9	15.4	14.2	14.4	14.7	14.9	15.4
12H	4H	14.3	14.6	14.8	15.0	15.5	14.3	14.6	14.8	15.0	15.5
	6H	14.3	14.4	14.7	14.9	15.4	14.3	14.4	14.7	14.9	15.4
	8H	14.2	14.4	14.7	14.9	15.4	14.2	14.4	14.7	14.9	15.4
Variations with the observer position at spacing:											
S =	1.0H	6.1 / -14.2					6.1 / -14.2				
	1.5H	8.9 / -15.7					8.9 / -15.7				
	2.0H	10.9 / -16.4					10.9 / -16.4				