

Laser Blade XS

Design iGuzzini

iGuzzini

Last information update: May 2025

Product configuration: Q905.01

Q905.01: Linear module LB XS for 48V track - HC 5 cells - Flood beam - 11.4W 954.5lm - 4000K - CRI 90 - White

Product code

Q905.01: Linear module LB XS for 48V track - HC 5 cells - Flood beam - 11.4W 954.5lm - 4000K - CRI 90 - White

Technical description

Fixed linear module with 5 optic elements complete with adapter for installation on a 48V low voltage track. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each light module on the track to be adjusted separately. Fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Extruded aluminium main body and technical dissipation unit. A rapid tool-free system for connecting the adapter electrically and mechanically to the track.

Installation

Mechanical fastening with adapter on track.

Colour

White (01)

Weight (Kg)

0.16

Mounting

Low voltage track

Wiring

Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	955	Colour temperature [K]:	4000
W system:	11.4	MacAdam Step:	2
lm source:	1150	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	10	Lamp code:	LED
Luminous efficiency (lm/W, real value):	83.7	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	LED current [mA]:	700
Beam angle [°]:	43°	Power factor:	See installation instructions
CRI (minimum):	90	Minimum dimming %:	5
Rf (Colour Fidelity Index):	92	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Rg (Gamut Index):	98	Control:	DALI

Polar

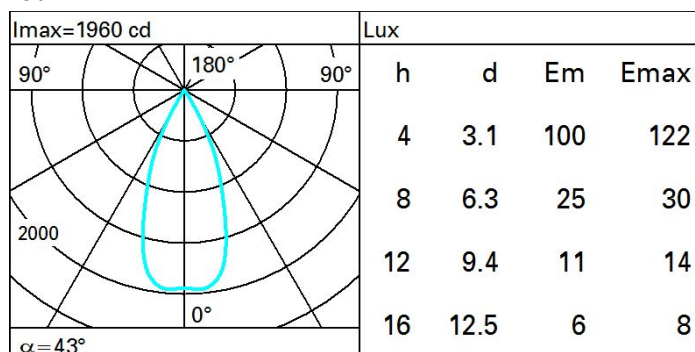

Isolux

