

Last information update: March 2025

Product configuration: ET01

ET01: Spotlight with bracket - Warm White LED - Integrated Ballast - Wall Washer optic - Ta 40°

**Product code**

ET01: Spotlight with bracket - Warm White LED - Integrated Ballast - Wall Washer optic - Ta 40°

Technical description

Spotlight designed to use LED lamps and a Wall Washer optic. Consists of a die-cast aluminium optical assembly, bracket and box for the ballast with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The Opti Beam Lens optical system comes complete with a Warm White monochrome LED circuit. The electronic DALI ballast is integrated in the product and compatible with remote management systems. Compatible with programming systems via DALI terminals or an NFC system. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Installation

Floor, ceiling or wall-mounted installation.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

9.35

Wiring

Double PG.

Complies with EN60598-1 and pertinent regulations



IK08



IP66



CE

UK
CAEurasian
Conformity

S




EAC



OCERT




WOM

PEP
ECO
PASS
PORT**Technical data**

Im system:	5487	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
W system:	63.3	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
Im source:	8850	Lamp code:	LED
W source:	57	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	86.7	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 50°C.
Light Output Ratio (L.O.R.) [%]:	62	Power factor:	See installation instructions
CRI (minimum):	80	Overvoltage protection:	10kV Common mode & 6kV Differential mode
Colour temperature [K]:	2700	Control:	DALI-2
MacAdam Step:	3		

Polar

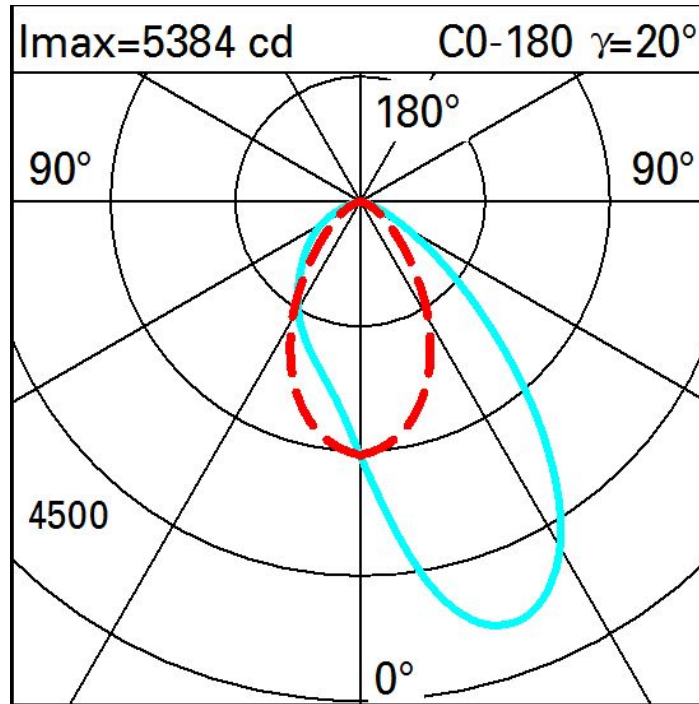

Illuminances

Lux Wall distance = 1m

3											
	0.6	3	11	36	81	102	75	29	8	2	0.4
2	8	21	49	108	183	224	224	122	47	17	6
	16	32	62	112	173	231	271	196	93	38	16
1	19	33	55	90	129	176	224	191	112	57	27
	18	29	46	67	88	119	154	151	111	67	35
0											
	m	-2	-1	0	1	2	3				