


Last information update: June 2023

Product configuration: MD92

MD92: recessed luminaire Ø 137 - neutral white passive dissipation integrated electronic control gear - flood

**Product code**MD92: recessed luminaire Ø 137 - neutral white passive dissipation integrated electronic control gear - flood **Attention! Code no longer in production****Technical description**

recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Structure with die-cast aluminium frame and main body; shaped surface with high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Steel rotation hinge, chrome-plated aluminium body closing ring. Reflector with high efficiency super-pure aluminium optic - flood beam angle. Body adjusted using manually operated device: internal 30° - external 75° - rotation about axis 355°. Supplied with electronic control gear connected to the luminaire. Neutral white high efficiency LED

Installation

recessed using special steel springs in false ceilings with thicknesses starting at 1 mm; preparation hole Ø 125

Colour

White / Aluminium (39) | Grey/Aluminium (78)

Weight (Kg)

1.01

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1578	CRI:	80
W system:	15.4	Colour temperature [K]:	4000
lm source:	2000	MacAdam Step:	2
W source:	12	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	102.5	Ballast losses [W]:	3.4
lm in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	79	ZVEI Code:	LED
Beam angle [°]:	42°	Number of optical assemblies:	1


Polar

	Imax=2715 cd	CIE nL 0.79 97-100-100-100-79 UGR 18.8-18.8 DIN A.61 UTE 0.79A+0.00T F*1=968 F*1+F*2=998 F*1+F*2+F*3=1000 CIBSE LG3 L<3000 cd/m² at 65° UGR<19 L<3000 cd/mq @65°	Lux			
			h	d	Em	Emax
			2	1.5	526	679
			4	3.1	132	170
			6	4.6	58	75
α=42°	8	6.1	33	42		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	64	61	66	63	63	60	76
1.0	73	70	67	66	69	67	67	64	81
1.5	77	75	73	71	74	72	71	69	87
2.0	80	78	77	75	77	76	75	72	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	80	79	78	76	97
4.0	84	83	82	82	81	81	80	78	99
5.0	84	84	83	83	82	82	80	79	100

Luminance curve limit

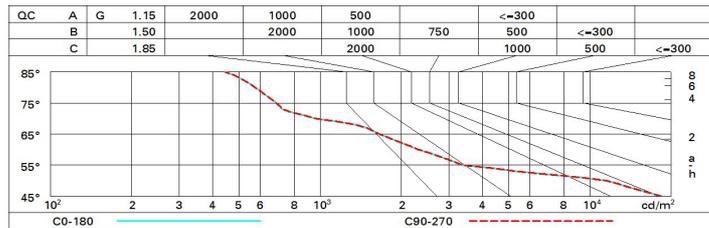

UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	19.4	20.1	19.7	20.3	20.5	19.4	20.1	19.7	20.3	20.5
	3H	19.2	19.8	19.6	20.1	20.4	19.2	19.8	19.6	20.1	20.4
	4H	19.2	19.7	19.5	20.0	20.3	19.2	19.7	19.5	20.0	20.3
	6H	19.1	19.6	19.4	19.9	20.3	19.1	19.6	19.4	19.9	20.3
	8H	19.1	19.6	19.4	19.9	20.2	19.1	19.6	19.4	19.9	20.2
	12H	19.0	19.5	19.4	19.8	20.2	19.0	19.5	19.4	19.8	20.2
4H	2H	19.2	19.7	19.5	20.0	20.3	19.2	19.7	19.5	20.0	20.3
	3H	19.0	19.5	19.4	19.8	20.2	19.0	19.5	19.4	19.8	20.2
	4H	18.9	19.4	19.3	19.7	20.1	18.9	19.4	19.3	19.7	20.1
	6H	18.9	19.2	19.3	19.6	20.0	18.9	19.2	19.3	19.6	20.0
	8H	18.8	19.1	19.3	19.6	20.0	18.8	19.1	19.2	19.6	20.0
	12H	18.8	19.1	19.2	19.5	19.9	18.8	19.1	19.2	19.5	19.9
8H	4H	18.8	19.1	19.2	19.6	20.0	18.8	19.1	19.3	19.6	20.0
	6H	18.7	19.0	19.2	19.4	19.9	18.7	19.0	19.2	19.4	19.9
	8H	18.7	18.9	19.2	19.4	19.9	18.7	18.9	19.2	19.4	19.9
	12H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
12H	4H	18.8	19.1	19.2	19.5	19.9	18.8	19.1	19.2	19.5	19.9
	6H	18.7	18.9	19.2	19.4	19.9	18.7	18.9	19.2	19.4	19.9
	8H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
Variations with the observer position at spacing:											
S =	1.0H	5.1 / -14.3					5.1 / -14.3				
	1.5H	7.9 / -16.4					7.9 / -16.4				
	2.0H	9.9 / -17.8					9.9 / -17.8				