


Last information update: May 2024

Product configuration: P177P177: iplan - warm white - UGR<19 with L<1,500 cd/m2 for $\alpha \geq 65^\circ$ - DALI**Product code**P177: iplan - warm white - UGR<19 with L<1,500 cd/m2 for $\alpha \geq 65^\circ$ - DALI **Attention! Code no longer in production****Technical description**

Recessed direct emission luminaire designed to use Warm White 3000K high colour rendering LEDs and be installed in modular false ceilings with a 625 x 625 mm step. Anodised aluminium perimeter profile. The micro-prismatic diffuser screen, combined with an inner screen and diffusing film, allows optimum diffusion of the direct light and controlled luminance UGR<19 with L<1,500 cd/m2 for $\alpha \geq 65^\circ$ ideal for environments where video monitors are used. The LEDs are arranged inside the perimeter and the DALI driver is housed in the product.

Installation

Recessed in modular false ceilings with a 625 x 625 mm step

Colour

Aluminium (12)

Mounting

ceiling pendant

Wiring

Product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations




IP20

IP43

On the visible part of the product once installed

**Technical data**


Im system:	3208	Colour temperature [K]:	3000
W system:	32	MacAdam Step:	3
Im source:	4650	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	28	Lamp code:	LED
Luminous efficiency (Im/W, real value):	100.3	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	69	Control:	DALI
CRI:	80		

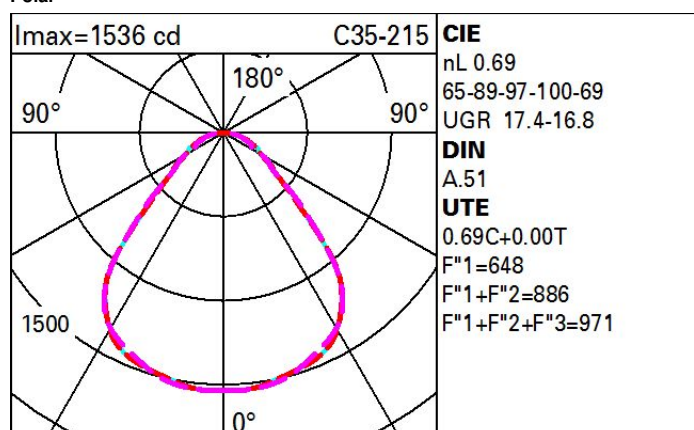Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	51	45	41	38	44	40	40	36	52
1.0	55	50	46	43	49	45	45	41	59
1.5	61	57	53	50	56	53	52	48	70
2.0	65	61	58	56	60	57	56	53	77
2.5	67	64	61	59	62	60	60	56	82
3.0	68	66	64	62	64	62	61	59	85
4.0	70	68	66	65	66	65	64	61	88
5.0	71	69	68	66	68	66	65	63	91

Luminance curve limit

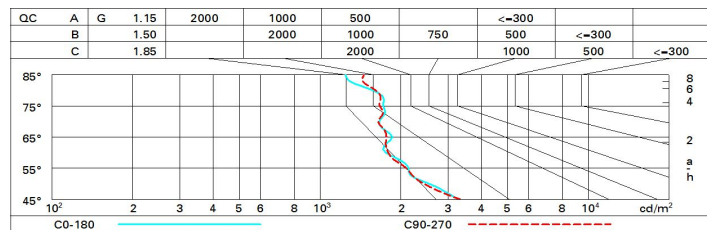

UGR diagram

Corrected UGR values (at 4050 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	14.6	15.5	14.9	15.8	16.0	14.6	15.5	14.9	15.8	16.0
	3H	15.5	16.3	15.8	16.6	16.9	14.8	15.6	15.1	15.9	16.2
	4H	15.9	16.8	16.3	17.1	17.4	14.8	15.6	15.2	15.9	16.3
	6H	16.4	17.1	16.7	17.5	17.8	14.8	15.6	15.2	15.9	16.3
	8H	16.5	17.3	16.9	17.6	17.9	14.8	15.6	15.2	15.9	16.2
	12H	16.6	17.3	17.0	17.7	18.0	14.8	15.5	15.2	15.9	16.2
4H	2H	14.8	15.6	15.2	15.9	16.3	15.9	16.7	16.3	17.1	17.4
	3H	15.9	16.6	16.3	17.0	17.3	16.3	17.0	16.7	17.4	17.7
	4H	16.5	17.2	17.0	17.5	17.9	16.5	17.2	17.0	17.5	17.9
	6H	17.1	17.7	17.6	18.1	18.5	16.7	17.3	17.2	17.7	18.1
	8H	17.4	17.9	17.8	18.3	18.7	16.8	17.3	17.2	17.7	18.2
	12H	17.5	18.0	18.0	18.4	18.9	16.8	17.3	17.3	17.7	18.2
8H	4H	16.8	17.3	17.3	17.7	18.2	17.4	17.9	17.8	18.3	18.7
	6H	17.6	18.0	18.0	18.4	18.9	17.7	18.2	18.2	18.6	19.1
	8H	17.9	18.2	18.4	18.7	19.2	17.9	18.3	18.4	18.7	19.2
	12H	18.1	18.4	18.6	18.9	19.5	18.1	18.4	18.6	18.9	19.4
12H	4H	16.8	17.3	17.3	17.7	18.2	17.6	18.0	18.0	18.4	18.9
	6H	17.7	18.0	18.1	18.5	19.0	18.0	18.3	18.5	18.8	19.3
	8H	18.0	18.3	18.5	18.8	19.4	18.2	18.5	18.7	19.0	19.5
Variations with the observer position at spacing:											
S =	1.0H	0.4 / -0.3					0.4 / -0.3				
	1.5H	1.0 / -0.7					1.0 / -0.7				
	2.0H	1.8 / -1.0					1.8 / -1.0				