

iGuzzini

M848: X26 superficie 1000 High Flux 4200K



 pending

Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	35	29	26	23	29	25	25	22	42
1.0	38	33	30	27	32	29	29	25	49
1.5	43	39	36	33	38	35	35	32	62
2.0	46	43	40	38	42	40	39	36	70
2.5	48	45	43	41	44	42	42	39	76
3.0	49	47	45	43	46	44	43	41	79
4.0	51	49	47	46	48	46	46	43	84
5.0	52	50	49	48	49	48	47	45	87

Courbe limite de luminance

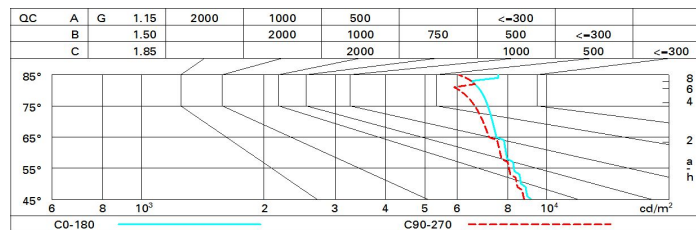


Diagramme UGR

Corrected UGR values (at 1117 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	19.5	20.6	19.8	20.9	21.2	19.4	20.5	19.7	20.8	21.0
	3H	21.0	22.0	21.3	22.3	22.6	19.8	20.9	20.2	21.2	21.5
	4H	21.7	22.6	22.0	22.9	23.3	20.0	21.0	20.4	21.3	21.6
	6H	22.2	23.1	22.6	23.4	23.8	20.1	21.0	20.5	21.4	21.7
	8H	22.4	23.3	22.8	23.6	24.0	20.1	21.0	20.5	21.3	21.7
	12H	22.6	23.4	23.0	23.8	24.2	20.1	20.9	20.5	21.3	21.7
4H	2H	20.1	21.1	20.5	21.4	21.7	21.3	22.3	21.7	22.6	22.9
	3H	21.8	22.6	22.2	23.0	23.3	22.0	22.8	22.4	23.2	23.5
	4H	22.5	23.3	23.0	23.7	24.1	22.3	23.0	22.7	23.4	23.8
	6H	23.2	23.8	23.6	24.3	24.7	22.5	23.2	23.0	23.6	24.0
	8H	23.4	24.0	23.9	24.5	24.9	22.6	23.2	23.1	23.6	24.1
	12H	23.7	24.2	24.1	24.7	25.1	22.6	23.2	23.1	23.6	24.1
8H	4H	22.8	23.4	23.3	23.8	24.3	23.0	23.6	23.5	24.0	24.5
	6H	23.6	24.1	24.1	24.5	25.0	23.4	23.9	23.9	24.4	24.9
	8H	23.9	24.4	24.4	24.8	25.3	23.6	24.0	24.1	24.5	25.0
	12H	24.2	24.6	24.7	25.1	25.6	23.7	24.1	24.2	24.6	25.1
12H	4H	22.8	23.4	23.3	23.8	24.3	23.2	23.7	23.6	24.1	24.6
	6H	23.6	24.1	24.1	24.6	25.1	23.6	24.0	24.1	24.5	25.0
	8H	24.0	24.4	24.5	24.9	25.4	23.8	24.2	24.3	24.7	25.2
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.1 / -0.1				
	1.5H	0.2 / -0.3					0.2 / -0.4				
	2.0H	0.5 / -0.6					0.4 / -0.7				