

Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	53	50	48	47	50	48	48	46	78
1.0	55	53	51	50	52	51	50	49	83
1.5	58	56	55	54	56	54	54	52	88
2.0	60	59	57	57	58	57	56	55	93
2.5	61	60	59	59	59	58	58	56	96
3.0	62	61	60	60	60	60	59	57	98
4.0	62	62	62	61	61	61	60	58	99
5.0	63	62	62	62	62	61	60	59	100

Courbe limite de luminance

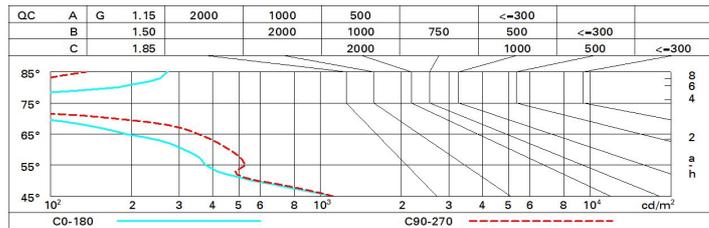


Diagramme UGR

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	-2.9	-0.7	-2.5	-0.4	-0.1	-0.5	1.0	-0.2	1.9	2.3
	3H	-3.0	-1.4	-2.6	-1.1	-0.7	-0.6	1.0	-0.2	1.4	1.7
	4H	-3.1	-1.7	-2.7	-1.4	-1.1	-0.6	0.7	-0.2	1.0	1.4
	6H	-3.0	-2.0	-2.6	-1.7	-1.3	-0.7	0.3	-0.3	0.7	1.0
	8H	-2.8	-1.9	-2.4	-1.5	-1.2	-0.7	0.3	-0.3	0.6	1.0
	12H	-2.7	-1.7	-2.3	-1.4	-1.0	-0.7	0.2	-0.3	0.6	0.9
4H	2H	-3.0	-1.7	-2.6	-1.4	-1.0	-0.6	0.8	-0.2	1.1	1.4
	3H	-3.1	-2.2	-2.7	-1.8	-1.4	-0.6	0.4	-0.2	0.7	1.1
	4H	-3.2	-2.3	-2.8	-1.9	-1.5	-0.7	0.3	-0.2	0.7	1.1
	6H	-3.4	-1.7	-2.9	-1.3	-0.8	-1.0	0.7	-0.6	1.1	1.6
	8H	-3.1	-1.2	-2.6	-0.7	-0.2	-1.2	0.7	-0.7	1.2	1.7
	12H	-2.8	-0.8	-2.3	-0.3	0.2	-1.3	0.7	-0.8	1.2	1.7
8H	4H	-3.7	-1.8	-3.2	-1.4	-0.9	-1.2	0.7	-0.7	1.2	1.7
	6H	-3.6	-1.7	-3.0	-1.3	-0.7	-1.3	0.5	-0.7	1.0	1.6
	8H	-2.8	-1.2	-2.3	-0.7	-0.2	-1.3	0.3	-0.7	0.8	1.4
	12H	-2.0	-0.9	-1.5	-0.4	0.1	-1.1	-0.0	-0.6	0.5	1.0
12H	4H	-3.8	-1.9	-3.3	-1.4	-0.9	-1.3	0.7	-0.7	1.2	1.7
	6H	-3.6	-2.0	-3.0	-1.5	-0.9	-1.2	0.3	-0.7	0.8	1.4
	8H	-2.6	-1.6	-2.1	-1.1	-0.5	-1.1	-0.0	-0.6	0.5	1.0
Variations with the observer position at spacing:											
S =	1.0H	2.6 / -2.5					5.2 / -4.5				
	1.5H	4.9 / -3.2					7.6 / -5.0				
	2.0H	6.7 / -3.5					9.6 / -6.9				