

## Blade R downlight



Design iGuzzini

iGuzzini

Last information update: November 2024

### Product configuration: R781

R781: Frame Ø 170 - Flood beam - LED



### Product code

R781: Frame Ø 170 - Flood beam - LED

### Technical description

Ring luminaire with 18+12 optical elements for LED lamps - fixed optics. The optic system guarantees a high level of visual comfort and no glare. The body includes a radiant surface made of die-cast aluminium. The 18 LED and 12 LED optical assemblies include control gear and separate on/off switches. Version includes a perimeter surface frame. High definition reflectors made of thermoplastic material vacuum-metallised with aluminium vapours, integrated in a set-back position in the anti-glare screen. Supplied with a power supply unit connected to the luminaire.

### Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - Ø 170 installation hole.

### Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)\* | White / burnished chrome (E7)\*

\* Colours on request

### Weight (Kg)

1.25

### Mounting

ceiling recessed

### Wiring

On the power supply unit with terminal board included. Available in DALI versions.

Complies with EN60598-1 and pertinent regulations



IP20

IP23


On the visible part of the product once installed



### Technical data

lm system:	4026	CRI (minimum):	90
W system:	51	Colour temperature [K]:	3000
lm source:	4850	MacAdam Step:	2
W source:	51	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	78.9	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	44°	Control:	DALI-2


### Polar

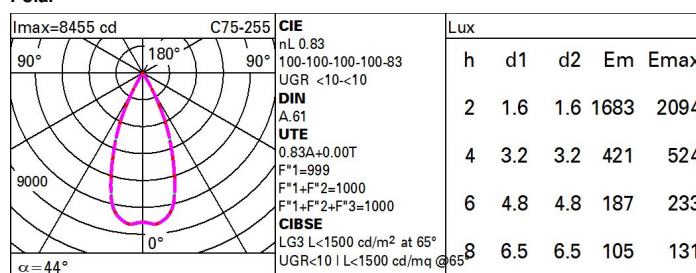

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	69	66	71	68	68	65	78
1.0	78	75	72	71	74	72	71	69	83
1.5	82	80	78	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

# Luminance curve limit

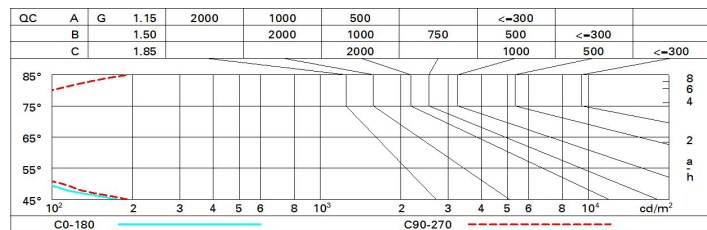

# UGR diagram

Corrected UGR values (at 4850 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20	0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20
viewed crosswise						viewed endwise					
2H	2H	1.8	2.3	2.0	2.6	2.8	1.7	2.3	2.0	2.5	2.8
	3H	1.6	2.1	1.9	2.4	2.7	1.6	2.1	1.9	2.4	2.7
	4H	1.5	2.0	1.9	2.3	2.6	1.5	2.0	1.9	2.3	2.6
	6H	1.5	1.9	1.8	2.2	2.5	1.5	1.9	1.8	2.2	2.5
	8H	1.4	1.9	1.8	2.2	2.5	1.4	1.9	1.8	2.2	2.5
12H	1.4	1.8	1.8	2.1	2.5	1.4	1.8	1.8	2.1	2.5	
4H	2H	1.5	2.0	1.9	2.3	2.6	1.5	2.0	1.9	2.3	2.6
	3H	1.4	1.8	1.8	2.1	2.5	1.4	1.8	1.8	2.1	2.5
	4H	1.3	1.7	1.7	2.0	2.4	1.3	1.7	1.7	2.0	2.4
	6H	1.2	1.5	1.6	1.9	2.3	1.2	1.5	1.6	1.9	2.3
	8H	1.2	1.5	1.6	1.9	2.3	1.2	1.5	1.6	1.9	2.3
12H	1.1	1.4	1.6	1.8	2.3	1.1	1.4	1.6	1.8	2.3	
8H	4H	1.2	1.5	1.6	1.9	2.3	1.2	1.5	1.6	1.9	2.3
	6H	1.1	1.3	1.5	1.8	2.2	1.1	1.3	1.6	1.8	2.2
	8H	1.0	1.2	1.5	1.7	2.2	1.0	1.2	1.5	1.7	2.2
	12H	1.0	1.1	1.5	1.6	2.1	1.0	1.2	1.5	1.6	2.2
12H	4H	1.1	1.4	1.6	1.8	2.3	1.1	1.4	1.6	1.8	2.3
	6H	1.0	1.2	1.5	1.7	2.2	1.1	1.3	1.5	1.7	2.2
	8H	1.0	1.1	1.5	1.6	2.1	1.0	1.2	1.5	1.7	2.2
Variations with the observer position at spacing:											
S =	1.0H	6.9 / -21.5					6.9 / -14.1				
	1.5H	9.7 / -23.4					9.7 / -14.5				
	2.0H	11.7 / -24.2					11.7 / -14.8				