


Q934: Encastré à 5 cellules - General Lighting Pro



Coefficients d'utilisation

R	77	75	73	71	55	53	33	00	DRR
K0.8	61	57	54	52	56	53	53	50	70
1.0	65	61	58	56	60	57	57	54	75
1.5	69	66	64	62	65	63	62	60	83
2.0	72	69	68	66	68	67	66	64	88
2.5	73	72	70	69	70	69	68	66	92
3.0	74	73	72	71	72	71	70	68	94
4.0	75	74	74	73	73	72	71	69	96
5.0	76	75	74	74	74	73	72	70	97

Courbe limite de luminance

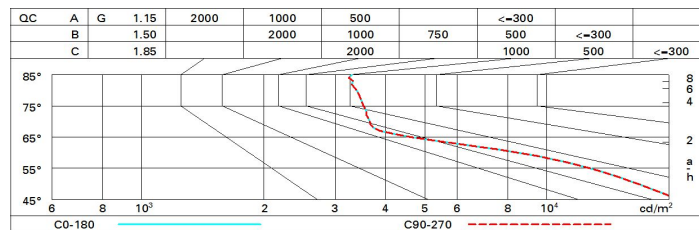


Diagramme UGR

Corrected UGR values (at 800 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.8	18.5	18.1	18.7	18.9	17.8	18.5	18.1	18.7	18.9
	3H	17.8	18.4	18.1	18.7	19.0	17.8	18.4	18.1	18.7	19.0
	4H	17.8	18.4	18.2	18.7	19.0	17.8	18.4	18.1	18.7	19.0
	6H	17.8	18.4	18.2	18.7	19.0	17.7	18.2	18.1	18.6	18.9
	8H	17.9	18.4	18.2	18.7	19.0	17.7	18.2	18.1	18.5	18.9
	12H	17.8	18.3	18.2	18.7	19.0	17.7	18.1	18.0	18.5	18.8
4H	2H	17.8	18.4	18.1	18.7	19.0	17.8	18.4	18.2	18.7	19.0
	3H	17.9	18.4	18.3	18.7	19.1	17.9	18.4	18.3	18.8	19.1
	4H	17.9	18.4	18.3	18.7	19.1	17.9	18.4	18.3	18.7	19.1
	6H	18.0	18.4	18.4	18.8	19.2	17.9	18.3	18.3	18.7	19.1
	8H	18.0	18.4	18.5	18.8	19.2	17.9	18.2	18.3	18.6	19.1
	12H	18.0	18.3	18.5	18.8	19.2	17.8	18.2	18.3	18.6	19.0
8H	4H	17.9	18.2	18.3	18.6	19.1	18.0	18.4	18.5	18.8	19.2
	6H	18.0	18.3	18.5	18.7	19.2	18.0	18.3	18.5	18.8	19.2
	8H	18.0	18.3	18.5	18.8	19.2	18.0	18.3	18.5	18.8	19.2
	12H	18.1	18.3	18.6	18.8	19.3	18.0	18.2	18.5	18.7	19.3
12H	4H	17.8	18.2	18.3	18.6	19.0	18.0	18.3	18.5	18.8	19.2
	6H	18.0	18.2	18.5	18.7	19.2	18.1	18.3	18.5	18.8	19.3
	8H	18.0	18.2	18.5	18.7	19.3	18.1	18.3	18.6	18.8	19.3
Variations with the observer position at spacing:											
S =		1.0H	1.5 / -1.5				1.5 / -1.5				
		1.5H	3.1 / -3.4				3.1 / -3.4				
		2.0H	4.9 / -4.6				4.9 / -4.6				