

Last information update: May 2024

**Product configuration: EC76**

EC76: Pole-mounted system – ST1.2 optic - Warm White - DALI - ø42-60mm



**Product code**

EC76: Pole-mounted system – ST1.2 optic - Warm White - DALI - ø42-60mm **Attention! Code no longer in production**

**Technical description**

Outdoor luminaire with direct light street optic, designed to use LED lamps. The optical assembly and the pole attachment system are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are: degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a textured acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. Option of adjusting the inclination in relation to the road surface by +20°/-5° (in 5° steps) for a pole-top installation and +5°/-20° (in 5° steps) for a lateral installation. 5 mm thick extra-clear sodium-calcium closure glass. Screw-free opening using an anodized extruded aluminium clip. Upper door retaining system. The high IP rating is guaranteed by the silicone gasket placed between the two elements. Complete with circuit having monochrome LEDs and polymer optic multilayer lenses. LEDs can be substituted in groups of 6. DALI electronic control gear. Midnight (100%-70%) or Bi-energy without external programming mode operation. Customised Midnight programming, fixed dimming and compatibility with flow regulators via a special programming interface. Control gear connected with quick-coupling connectors. Driver with automatic internal temperature control system. Tool-free removable control gear unit. The light flow emitted in the upper hemisphere of the system in the horizontal position is null (in conformity with the strictest standards for the prevention of light pollution). All external screws are made of stainless steel.

**Installation**

The floodlight can be installed with a pole-top or lateral mounting using a die-cast aluminium pole-top for 42/60mm diameter pole ends.

**Colour**

Grey (15)

**Weight (Kg)**

7

**Mounting**

wall arm|pole-top

**Wiring**

The attachment guarantees the completely safe passage of power cables, avoiding piercing. 6-pole terminal board for ø 7-14mm cables. Overvoltage protection: 10KV Common Mode and 6KV Differential Mode.


Complies with EN60598-1 and pertinent regulations




**Technical data**

|  |       |                                       |                                |
|--|-------|---------------------------------------|--------------------------------|
| lm system:   | 7810  | Life Time LED 1:                      | 100,000h - L90 - B10 (Ta 25°C) |
| W system:  | 74.6  | Life Time LED 2:                      | 84,000h - L90 - B10 (Ta 40°C)  |
| lm source:   | -     | Life Time LED 3:                      | 100,000h - L80 - B10 (Ta 40°C) |
| W source:  | -     | Voltage [Vin]:                        | 230                            |
| Luminous efficiency (lm/W, real value):            | 104.7 | Lamp code:                            | LED                            |
| lm in emergency mode:                              | -     | Number of lamps for optical assembly: | 1                              |
| Total light flux at or above an angle of 90° [Lm]: | 0     | ZVEI Code:                            | LED                            |
| Light Output Ratio (L.O.R.) [%]:                   | 100   | Number of optical assemblies:         | 1                              |
| CRI (minimum):                                     | 70    | Intervallo temperatura ambiente:      | from -40°C to 50°C.            |
| Colour temperature [K]:                            | 3000  | Control:                              | DALI                           |
| MacAdam Step:                                      | 3     |                                       |                                |

**Polar**

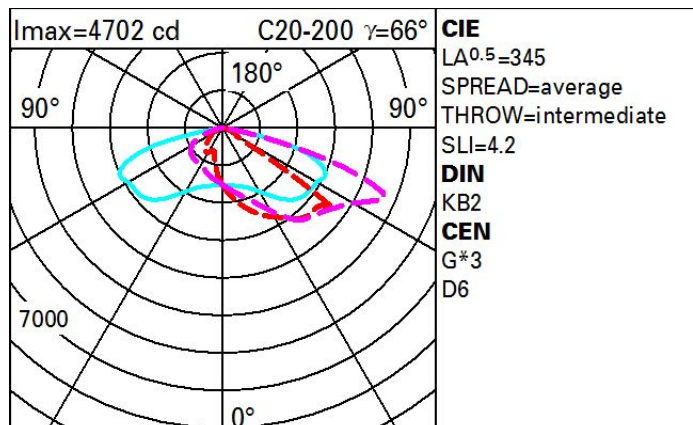

# Isolux

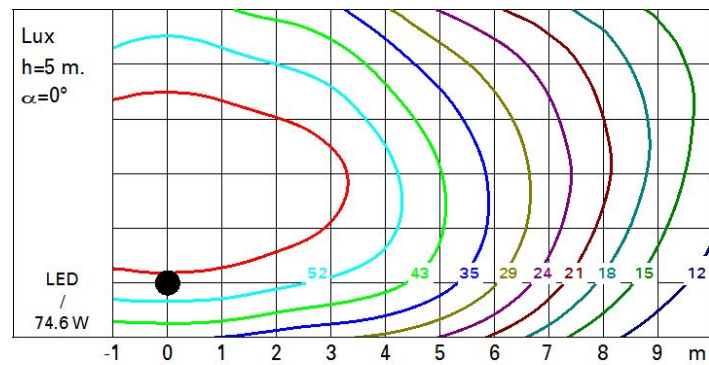

# Utilisation factors

