

Last information update: January 2025

**Product configuration: MU98.43**

MU98.43: 5 - cell Recessed luminaire - LED - Warm white - Flood optic - 9.8W 750.8lm - 3000K - CRI 95 - Black / Black



**Product code**

MU98.43: 5 - cell Recessed luminaire - LED - Warm white - Flood optic - 9.8W 750.8lm - 3000K - CRI 95 - Black / Black

**Technical description**

rectangular miniaturised recessed luminaire with 5 optical elements with LED lamps - fixed optics - flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare . Warm white high colour rendering LED.

**Installation**


recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 141

**Colour**


Black / Black (43)

**Mounting**

wall recessed|ceiling recessed



Complies with EN60598-1 and pertinent regulations




On the visible part of the product once installed

**Technical data**

lm system:	751	CRI (typical):	97
W system:	9.8	Colour temperature [K]:	3000
lm source:	940	MacAdam Step:	3
W source:	9.8	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	76.6	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1
Beam angle [°]:	31°	LED current [mA]:	700
CRI (minimum):	95		

**Polar**

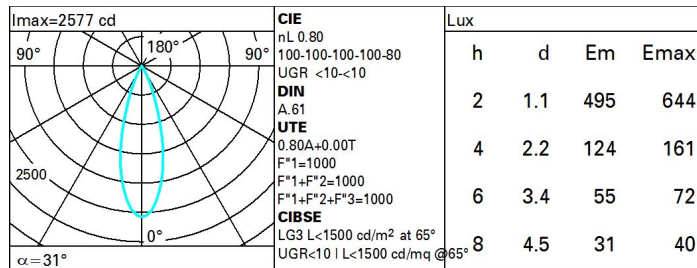

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	81	80	78	77	79	77	76	74	93
2.5	83	82	81	80	80	79	79	77	96
3.0	84	83	82	81	82	81	80	78	98
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	85	84	84	83	82	80	100

UGR diagram

Corrected UGR values (at 940 lm bare lamp luminous flux)											
Reflect.:											
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed					viewed				
x	y	crosswise					endwise				
2H	2H	-3.4	-2.8	-3.1	-2.6	-2.4	-3.4	-2.8	-3.1	-2.6	-2.4
	3H	-3.5	-3.0	-3.2	-2.8	-2.5	-3.5	-3.0	-3.2	-2.8	-2.5
	4H	-3.6	-3.1	-3.2	-2.8	-2.5	-3.6	-3.1	-3.2	-2.8	-2.5
	6H	-3.6	-3.2	-3.3	-2.9	-2.6	-3.6	-3.2	-3.3	-2.9	-2.6
	8H	-3.7	-3.3	-3.3	-3.0	-2.6	-3.7	-3.3	-3.3	-3.0	-2.6
	12H	-3.7	-3.3	-3.3	-3.0	-2.7	-3.7	-3.3	-3.3	-3.0	-2.7
4H	2H	-3.6	-3.1	-3.2	-2.8	-2.5	-3.6	-3.1	-3.2	-2.8	-2.5
	3H	-3.7	-3.3	-3.3	-3.0	-2.7	-3.7	-3.3	-3.3	-3.0	-2.7
	4H	-3.8	-3.5	-3.4	-3.1	-2.7	-3.8	-3.5	-3.4	-3.1	-2.7
	6H	-3.9	-3.6	-3.5	-3.2	-2.8	-3.9	-3.6	-3.5	-3.2	-2.8
	8H	-3.9	-3.7	-3.5	-3.3	-2.8	-3.9	-3.7	-3.5	-3.3	-2.8
	12H	-4.0	-3.8	-3.5	-3.3	-2.9	-4.0	-3.8	-3.5	-3.3	-2.9
8H	4H	-3.9	-3.7	-3.5	-3.3	-2.8	-3.9	-3.7	-3.5	-3.3	-2.8
	6H	-4.0	-3.8	-3.6	-3.4	-2.9	-4.0	-3.8	-3.6	-3.4	-2.9
	8H	-4.1	-3.9	-3.6	-3.4	-2.9	-4.1	-3.9	-3.6	-3.4	-2.9
	12H	-4.1	-4.0	-3.6	-3.5	-3.0	-4.1	-4.0	-3.6	-3.5	-3.0
12H	4H	-4.0	-3.8	-3.5	-3.3	-2.9	-4.0	-3.8	-3.5	-3.3	-2.9
	6H	-4.1	-3.9	-3.6	-3.4	-2.9	-4.1	-3.9	-3.6	-3.4	-2.9
	8H	-4.1	-4.0	-3.6	-3.5	-3.0	-4.1	-4.0	-3.6	-3.5	-3.0
Variations with the observer position at spacing:											
S =	1.0H	0.8 / -18.5					0.8 / -18.5				
	1.5H	9.6 / -18.7					9.6 / -18.7				
	2.0H	11.6 / -23.0					11.6 / -23.0				