

Last information update: April 2024

**Product configuration: MC39**

MC39: Round recessed luminaire - D=226 mm H=103 mm - LED warm white - DALI ballast - general light optic

**Product code**MC39: Round recessed luminaire - D=226 mm H=103 mm - LED warm white - DALI ballast - general light optic **Attention! Code no longer in production****Technical description**

Recessed fixed round luminaire designed to use a LED lamp. Version with rim for surface-mounting. Multi-faceted reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 2000 lm DALI LED unit in a warm white tone 3000K with IRC90 and driver separate from the luminaire. General light distribution.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

**Colour**

White / Aluminium (39)

**Mounting**

ceiling recessed


**Wiring**

Product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations



IP20

**Technical data**

lm system:	1910	Colour temperature [K]:	3000
W system:	25	MacAdam Step:	3
lm source:	2000	Life Time LED 1:	50,000h - L80 - B20 (Ta 25°C)
W source:	21	Lamp code:	LED
Luminous efficiency (lm/W, real value):	76.4	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	95	Control:	DALI
CRI:	90		


**Polar**

Imax=1037 cd		CIE nL 0.95 72-99-100-100-95 UGR 20.8-20.8 DIN A.61 UTE 0.95B+0.00T F*1=716 F*1+F*2=985 F*1+F*2+F*3=1000 CIBSE LG3 L<3000 cd/m² at 65°	Lux			
90°	180°		h	d	Em	E <sub>max</sub>
1000	0°		1	1.9	707	1037
			2	3.9	177	259
			3	5.8	79	115
			4	7.7	44	65

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	66	61	57	65	60	59	55	57
1.0	80	73	68	64	72	67	67	62	65
1.5	88	83	79	76	81	78	77	73	76
2.0	92	88	85	83	87	84	83	79	83
2.5	95	92	89	87	90	88	87	83	87
3.0	96	94	92	90	92	90	89	86	90
4.0	98	96	94	93	94	93	91	88	92
5.0	99	97	96	94	95	94	92	89	93

# Luminance curve limit

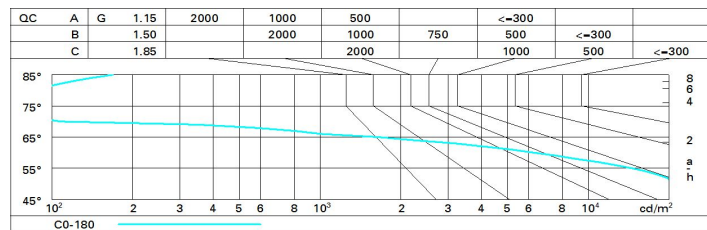

# UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	21.2	22.1	21.5	22.3	22.5	21.2	22.1	21.5	22.3	22.5
	3H	21.1	21.8	21.4	22.1	22.4	21.2	21.9	21.5	22.2	22.5
	4H	21.0	21.7	21.3	22.0	22.3	21.1	21.8	21.5	22.1	22.4
	6H	20.9	21.5	21.3	21.9	22.2	21.1	21.7	21.4	22.0	22.3
	8H	20.9	21.5	21.3	21.8	22.2	21.0	21.6	21.4	22.0	22.3
	12H	20.8	21.4	21.2	21.8	22.1	21.0	21.6	21.4	21.9	22.3
4H	2H	21.1	21.8	21.5	22.1	22.4	21.0	21.7	21.3	22.0	22.3
	3H	21.0	21.6	21.4	21.9	22.3	21.0	21.6	21.4	21.9	22.3
	4H	20.9	21.4	21.3	21.8	22.2	20.9	21.4	21.3	21.8	22.2
	6H	20.8	21.3	21.2	21.7	22.1	20.8	21.3	21.2	21.7	22.1
	8H	20.8	21.2	21.2	21.6	22.0	20.8	21.2	21.2	21.6	22.0
	12H	20.7	21.1	21.2	21.5	22.0	20.7	21.1	21.2	21.5	22.0
8H	4H	20.8	21.2	21.2	21.6	22.0	20.8	21.2	21.2	21.6	22.0
	6H	20.7	21.0	21.2	21.5	21.9	20.7	21.0	21.2	21.5	21.9
	8H	20.6	20.9	21.1	21.4	21.9	20.6	20.9	21.1	21.4	21.9
	12H	20.6	20.8	21.1	21.3	21.8	20.6	20.8	21.1	21.3	21.8
12H	4H	20.7	21.1	21.2	21.5	22.0	20.7	21.1	21.2	21.5	22.0
	6H	20.6	20.9	21.1	21.4	21.9	20.6	20.9	21.1	21.4	21.9
	8H	20.6	20.8	21.1	21.3	21.8	20.6	20.8	21.1	21.3	21.8
Variations with the observer position at spacing:											
S =		0.6 / -1.8					0.6 / -1.8				
		2.3 / -10.0					2.3 / -10.0				
		4.2 / -21.2					4.2 / -21.2				