

Configuraciones productos: EZ44

EZ44: Wall-/Ceiling-mounted – Warm White – 220÷240Vac DALI – L=611mm – Wall Grazing Spot optic



EZ44: Wall/Ceiling-mounted – Warm White – 220÷240Vac DALI – L=611mm – Wall Grazing Spot optic **¡Advertencia! Código fuera de producción**

Direct light luminaire, designed to use monochrome LED lamps, DALI 220÷240Vac dimmable with searching and addressing function. Ceiling-, wall- or surface-mounted. Consists of a body and supports for installation, to be ordered separately. The body is made of extruded aluminium and includes die-cast aluminium end caps with 50/60 Shore A silicone seals. It is subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate in Warm White and a 220÷240Vac DALI electronic driver (ballast included). Supplied with a double PG13.5 and outlet cables for pass-through wiring with IP68 male/female joiners. Fitted with a PMMA diffusing filter and optics with a plastic (methacrylate) lens for Wall Grazing Spot lighting. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

Disponibles como accesorios para la instalación: brazos de aplique orientables de acero inoxidable AISI304.

Blanco (01) | Negro (04) | Gris (15) | Marrón óxido (F5)

1.8

fijación en pared|a la pared|en el techo

Incluye tarjeta de control DALI y alimentador electrónico 220 - 240 Vca. El producto incorpora un prensacable PG11 de latón niquelado con cable de salida de goma H05RN-F 5x1,5 mm² con conector macho IP68. Para la conexión eléctrica y el control DALI disponibles: conector hembra IP68 de 5 polos, conector macho y conector hembra IP68 de 5 polos, conector de derivación macho/hembra IP68 de 3 vías 5 polos 250/400 V para DALI.


Producto con tecnología led.

Se conforma con EN60598-1 y regulaciones pertinentes



Im de sistema:	1848	MacAdam Step:	3
W de sistema:	27.8	Life time (vida útil) LED 1:	100,000h - L80 - B10 (Ta 25°C)
Im de la fuente:	2800	Life time (vida útil) LED 2:	100,000h - L80 - B10 (Ta 40°C)
W de la fuente:	21	Voltaje [Vin]:	230
Eficiencia luminosa (lm/W, valor del sistema):	66.5	Código de lámpara:	LED
Im en modo emergencia:	-	Número de lámparas por grupo óptico:	1
Flujo total de emisión en un ángulo de 90º o superior [Lm]:	0	Código ZVEI:	LED
Light Output Ratio (L.O.R.):	66	Número de grupos ópticos:	1
[%]:		Rango de temperatura ambiente operativa:	de -30°C a 50°C.
CRI (mínimo):	80	Control:	DALI-2
Temperatura de color [K]:	3000		

Polar

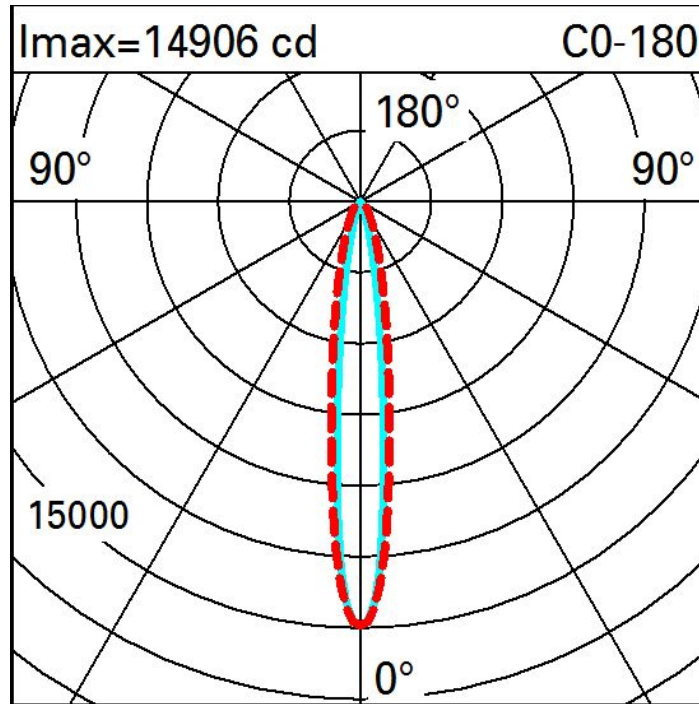

Iluminaciones

Lux												Wall distance = 1m	
3													
	0.2	0.5	1	3	7	10	7	3	1	0.5	0.2		
2	1	2	4	8	13	17	13	8	4	2	1		
	2	3	5	8	14	17	14	8	5	3	2		
1	2	3	5	8	14	19	14	8	5	3	2		
	2	3	5	8	14	19	14	8	5	3	2		
0													
	m	-2	-1	0	1	2	3						