



Last information update: May 2024

Product configuration: Q204

Q204: square recessed luminaire - warm white passive dissipation LED - integrated DALI control gear - medium

**Product code**Q204: square recessed luminaire - warm white passive dissipation LED - integrated DALI control gear - medium **Attention! Code no longer in production****Technical description**

Recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Square sheet steel perimeter frame. Main structure made of die-cast aluminium. Steel rotation hinges. Die-cast aluminium lamp body with shaped surface for high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Chrome-plated aluminium lamp body closing ring. Riflettore con ottica ad alta efficienza in alluminio superpuro - apertura medium. Orientamento del corpo con dispositivo di manovra manuale: interno 29° - esterno 75° - rotazione sull'asse 355°. Supplied with DALI dimmable control gear connected to the luminaire. Warm white high efficiency LED.

Installation

recessed using steel springs for false ceilings with thicknesses starting at 1 mm; preparation slot 142 x 142 mm

Colour

White / Aluminium (39) | Grey / Black / Aluminium (E1)

Weight (Kg)

0.95

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	2370	CRI:	80
W system:	24.6	Colour temperature [K]:	3000
Im source:	3000	MacAdam Step:	2
W source:	22	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	96.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	22°	Control:	DALI


Polar

Imax=7973 cd		CIE		Lux			
		nL 0.79		h	d	Em	Emax
		95-100-100-100-79					
		UGR 16.9-16.9					
		DIN					
		A.61					
		UTE		2	0.8	1575	1993
		0.79A+0.00T		4	1.6	394	498
		F*1=954		6	2.3	175	221
		F*1+F*2=997		8	3.1	98	125
		F*1+F*2+F*3=1000					
CIBSE							
LG3 L<1500 cd/m² at 65°							
UGR<19 L<1500 cd/mq @65°							
α=22°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	63	61	65	62	62	59	75
1.0	73	70	67	65	69	66	66	63	80
1.5	77	75	72	71	74	72	71	68	87
2.0	80	78	76	75	77	75	74	72	91
2.5	81	80	79	78	79	78	77	75	94
3.0	82	81	80	80	80	79	78	76	96
4.0	84	83	82	81	81	81	80	78	98
5.0	84	83	83	83	82	82	80	78	99

Luminance curve limit

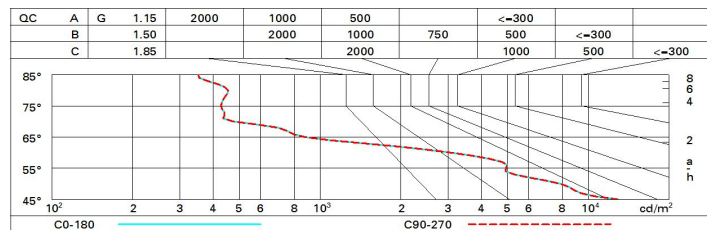

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.7	19.3	18.0	19.6	19.9	17.7	19.3	18.0	19.6	19.9
	3H	17.6	18.8	17.9	19.1	19.4	17.6	18.8	17.9	19.1	19.4
	4H	17.5	18.6	17.9	18.9	19.2	17.5	18.6	17.9	18.9	19.3
	6H	17.4	18.5	17.8	18.8	19.2	17.4	18.5	17.8	18.8	19.2
	8H	17.3	18.4	17.7	18.8	19.2	17.3	18.4	17.7	18.8	19.2
	12H	17.3	18.4	17.7	18.7	19.1	17.3	18.4	17.7	18.7	19.1
4H	2H	17.5	18.6	17.9	18.9	19.3	17.5	18.6	17.9	18.9	19.2
	3H	17.3	18.4	17.7	18.7	19.1	17.3	18.4	17.7	18.7	19.1
	4H	17.2	18.2	17.6	18.6	19.0	17.2	18.2	17.6	18.6	19.0
	6H	17.0	18.3	17.4	18.7	19.1	17.0	18.3	17.4	18.7	19.1
	8H	16.9	18.3	17.3	18.7	19.2	16.9	18.3	17.3	18.7	19.2
	12H	16.7	18.3	17.2	18.7	19.2	16.7	18.3	17.2	18.7	19.2
8H	4H	16.9	18.3	17.3	18.7	19.2	16.9	18.3	17.3	18.7	19.2
	6H	16.7	18.1	17.2	18.6	19.1	16.7	18.1	17.2	18.6	19.1
	8H	16.7	17.9	17.2	18.4	18.9	16.7	17.9	17.2	18.4	18.9
	12H	16.8	17.7	17.3	18.2	18.7	16.8	17.7	17.3	18.2	18.7
12H	4H	16.7	18.3	17.2	18.7	19.2	16.7	18.3	17.2	18.7	19.2
	6H	16.7	17.9	17.2	18.4	18.9	16.7	17.9	17.2	18.4	18.9
	8H	16.8	17.7	17.3	18.2	18.7	16.8	17.7	17.3	18.2	18.7
Variations with the observer position at spacing:											
S =	1.0H	4.3 / -9.6					4.3 / -9.6				
	1.5H	7.1 / -15.0					7.1 / -15.0				
	2.0H	9.1 / -18.0					9.1 / -18.0				