

Laser Blade



Design iGuzzini

iGuzzini

Last information update: February 2025

Product configuration: QL55

QL55: Minimal section 5 LEDs - Wall Washer - LGC - Tunable White



Product code

QL55: Minimal section 5 LEDs - Wall Washer - LGC - Tunable White

Technical description

Minimal linear recessed miniaturised luminaire. Using LED lamps with a high colour rendering index and a different colour temperature allows dynamic light modulation to be obtained. The variation is achieved by mixing an emission of 3 x 2700K LEDs and 2 x 5700K LEDs. Despite the disparity of lamps that use extreme channels - 2700K and 5700K - the intensity of the flux emitted remains the same. Moreover, even when products of different sizes are used, the colour temperature remains constant and uniform. Main body with die-cast aluminium radiant surface; frameless version for mounting flush with ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Specialised asymmetrical optic system (patented) for obtaining homogeneous and efficient wall lighting. The black polycarbonate perimeter frame is designed to significantly reduce the effect of longitudinal glare while also guaranteeing maximum light uniformity on the wall. Flux enhancer - superpure aluminium reflector - asymmetrical textured PMMA screen. Supplied with an integrated power supply system (basic) that, without using additional components, allows the colour temperature to be changed by simply pressing the buttons (max 4 products). A DALI programmable setup with an intuitive, easy-to-use touch screen can be obtained using codes 6170 + M630. Other management systems are also available with a separate code for larger systems that require the intervention of a specialised technician to programme them: the MH97 + MH93 + MI02 group offers a DALI / KNX programmable solution, and the MH97 + MH93 + M618 group allows the system management to be extended to remote devices like tablet and smartphones too.

Installation

The recess body is inserted in the specific adapter installed previously by means of a steel wire spring - check the thickness of the false ceiling and use a compatible frame available with a separate item code.

Colour
Black (04)

Weight (Kg)
0.47

Mounting

wall recessed|ceiling recessed

Wiring

Control gear units included. Different management systems are available with a separate code. For technical details, properties and connection procedures see the instruction sheet.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	264	Lamp code:	LED
W system:	16.8	Number of lamps for optical assembly:	1
Im source:	850	ZVEI Code:	LED
W source:	8.9	Number of optical assemblies:	1
Luminous efficiency (Im/W, real value):	15.7	Power factor:	See installation instructions
Im in emergency mode:	-	Inrush current:	10 A / 200 µs
Total light flux at or above an angle of 90° [Lm]:	0	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 18 luminaires B16A: 30 luminaires C10A: 31 luminaires C16A: 51 luminaires
Light Output Ratio (L.O.R.) [%]:	31	Minimum dimming %:	1
CRI (typical):	97	Overvoltage protection:	4kV Common mode & 4kV Differential mode
Colour temperature [K]:	Tunable white 2700 - 5700	Control:	DALI-2
Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)		

Polar

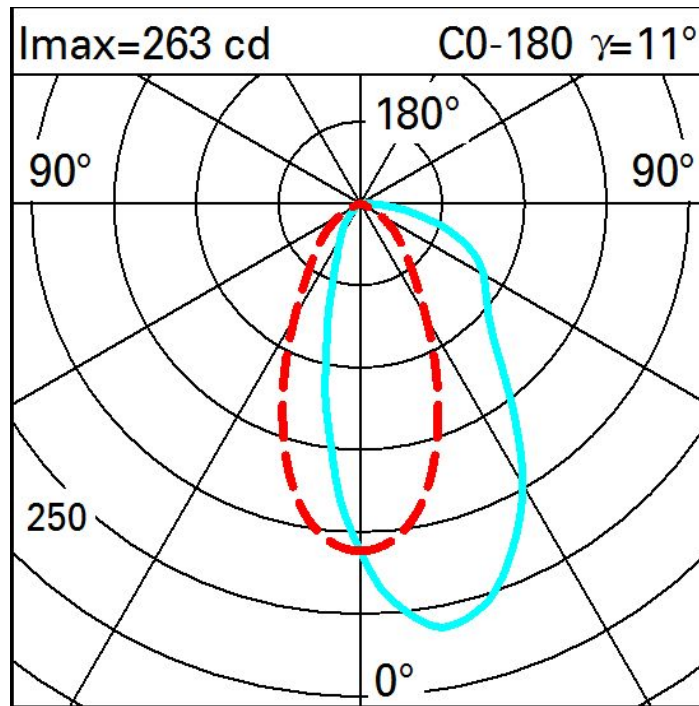

Illuminances

Lux											Wall distance = 1m	
3												
	0.2	0.4	1	6	26	57	26	6	1	0.4	0.2	
2	0.4	1	3	10	26	41	26	10	3	1	0.4	
	0.8	2	4	10	22	30	22	10	4	2	0.8	
1	1.0	2	4	9	16	20	16	9	4	2	1.0	
	1.0	2	4	7	11	13	11	7	4	2	1.0	
0												
	m	-2	-1	0	1	2	3					