



Last information update: February 2025

**Product configuration: QG35**

QG35: Ø 225 mm - warm white - DALI



**Product code**

QG35: Ø 225 mm - warm white - DALI

**Technical description**

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Dissipater made of painted grey die-cast aluminium. Product complete with LED lamp in warm white colour tone (3000K). Wall-washer light emission.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

1.03

**Mounting**

ceiling surface

**Wiring**

product complete with DALI components


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	2947	Colour temperature [K]:	3000
W system:	25.3	MacAdam Step:	2
lm source:	3550	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Lamp code:	LED
Luminous efficiency (lm/W, real value):	116.5	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	83	Control:	DALI-2
CRI (minimum):	80		

Polar

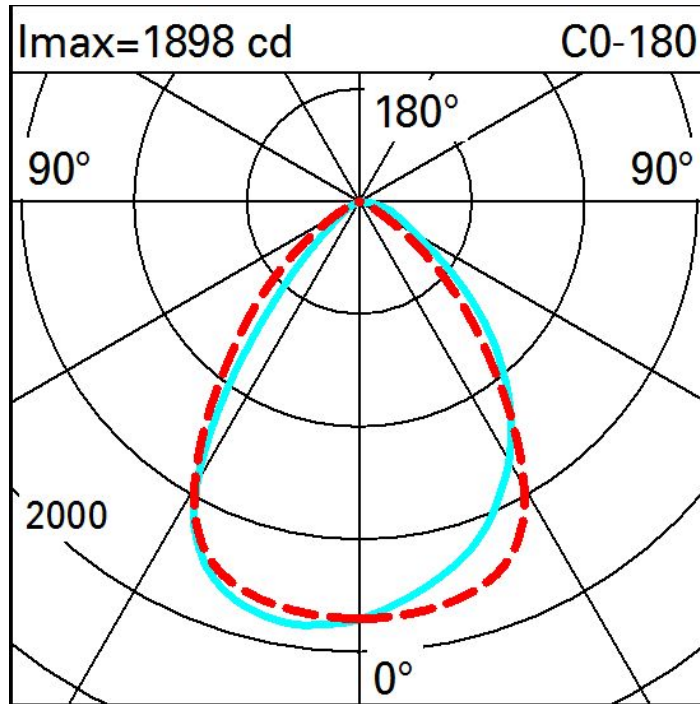

Illuminances

Lux		Wall distance = 1m										
3												
		1	3	9	27	95	156	95	27	9	3	1
2		2	6	18	67	187	279	187	67	18	6	2
		4	13	39	95	172	216	172	95	39	13	4
1		9	21	43	80	117	134	117	80	43	21	9
		12	23	39	58	75	83	75	58	39	23	12
0												
	m	-2	-1	0	1	2	3					