

# QUICK SHIP SPEC SHEET

## LASER BLADE 5

WALL WASHER




SPECIFICATION SHEET

PAGE: 1 OF 2

Project name: \_\_\_\_\_

Type: \_\_\_\_\_

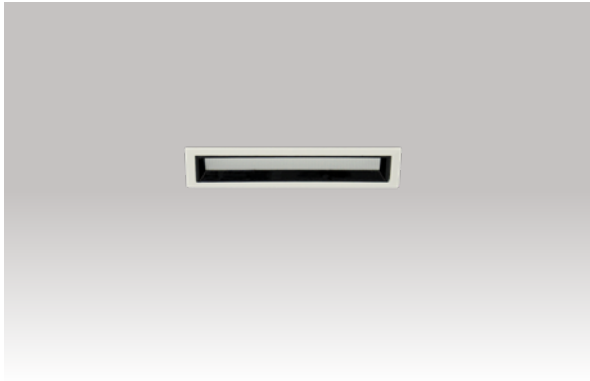

Low luminance architectural downlight

**Luminaire characteristic:**

**Power input:** 13W

**Lumens:** 355 lm (for 3000K, 95CRI)

**Luminaire efficacy:** 27 lm/W

**Source:** White LED, (LM-80 tested)

3000K : 95CRI

**Lumen maintenance:** >90% of initial lumens at 50 000 hours (L90), (LM-79 tested).

**Optic:** Asymmetric Wall Washer.

**Material:**

Body: Die-cast aluminum

Reflector: Thermoplastic

Baffle: Thermoplastic

Housing: Galvanized steel

**Electrical:** Integral high efficiency electronic driver, rated at 50 000 hours 120V-277V.

**Mounting:** New construction housing, suitable for insulated ceiling.

**Finish:** White (RAL9010) painted finish.


**Weight:** 0.79lbs (0.36kg)

**Warranty:** 5 year limited warranty.

**Certification:** cULus listed for damp location.


**Rating:** IP20

Trim

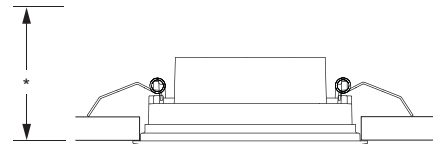

SECTION VIEW

\*For minimum clearance height see mounting info on page 2.



BOTTOM VIEW

# QUICK SHIP SPEC SHEET

## LASER BLADE 5

### WALL WASHER



Project name: \_\_\_\_\_

Type: \_\_\_\_\_

#### TECHNICAL DATA

Visit [iguzzini.com/us](http://iguzzini.com/us) for complete photometric data.


LB05



LOAD (W)	CCT (K)	CRI	OPTIC	LUMENS (lm)	EFFICACY (lm / w)	MAX CANDELA (cd)	MODEL
13W	3000K	95	Wall Washer	355	27	280	I.MQ68

Wall Washer (3000K, 95 CRI)

	Center Beam fc	Beam Width ft
2ft	52.5	1.9
4ft	13.1	3.8
6ft	5.83	5.7
8ft	3.28	7.5
10ft	2.10	9.4
12ft	1.46	11.3



#### MOUNTING


Trim version:

**BI5125** - Standard housing suitable for insulated ceiling

**Dimensions:** 6½" x 11⅝" (166mm x 294mm)

**Hanger bars:** 9" to 15¼" (229 to 387mm)

**Clearance:** 4⅞" (122mm)

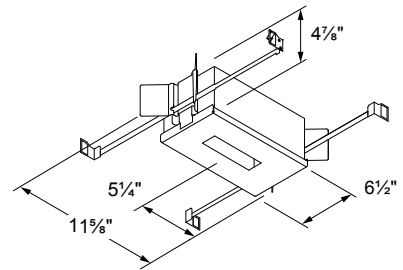

#### INSTALLATION INFO

**Ceiling thickness:** ⅛" to 1⅞" (3mm to 29mm)

**Cut-out dimensions:** 1½" x 5½" (37mm x 141mm)

#### ORDERING INFO

<b>I.MQ68</b> - MODEL	<b>UNV</b> - VOLTAGE	<b>01</b> - FINISH	<b>BI5125</b> - MOUNTING
<b>MODEL</b> Trim ● <b>I.MQ68</b> - 3000K, 95CRI	<b>VOLTAGE</b> ● <b>UNV</b> - 120-277V	<b>FINISH</b> ● <b>01</b> - White	<b>MOUNTING</b> Trim ● <b>BI5125</b> - Insulated ceiling housing