

Last information update: October 2020

Product configuration: 5632+1785

5632: Kriss 150 W QT-DE

**Product code**5632: Kriss 150 W QT-DE **Attention! Code no longer in production****Technical description**

Outdoor wall luminaire made of aluminium. The optic system features a biconvex glass lens in the upper section of the optical assembly and a protection glass in the lower section. This system creates "vertical blades of light" in the upper section of the wall and an 84° light cone in the lower section. Die cast aluminium plate for wall fixing with a hole protected with plastic material for the wiring. The body of the fitting is fixed to the plate with a screw, allowing for easy lamp replacement.

Installation

Fixed to the wall with fischer screws.

Colour

White (01) | Black (04) | Grey (15)

Weight (Kg)

2.52


Mounting

wall surface

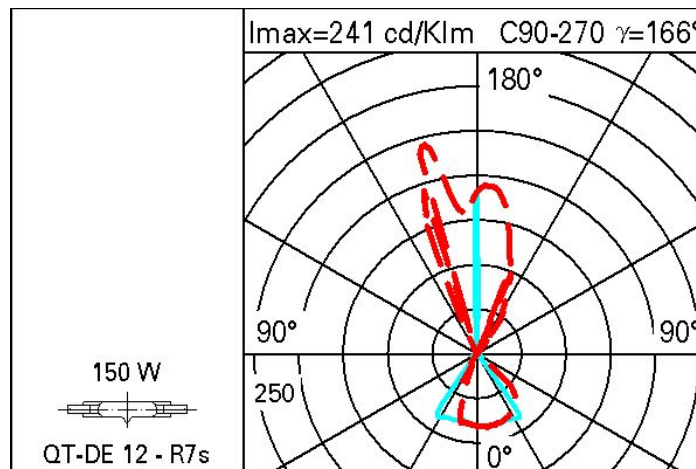
Wiring

Terminal board on the fixing plate.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	296,6	Colour temperature [K]:	3000
W system:	150	Ballast losses [W]:	0
lm source:	2400	Voltage [Vin]:	230
W source:	150	Lamp code:	1785
Luminous efficiency (lm/W, 2 real value):		Socket:	R7s
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	32	ZVEI Code:	QT-DE 12
Light Output Ratio (L.O.R.) [%]:	12	Number of optical assemblies:	1
CRI:	100	Ambient operating temperature range:	from -20°C to +35°C.

Polar

Isolux

