

Last information update: April 2024

**Product configuration: ME70**

ME70: iplan - 596 x 596 mm h 26 mm - neutral white LED- DALI control gear - general light optic

**Product code**ME70: iplan - 596 x 596 mm h 26 mm - neutral white LED- DALI control gear - general light optic **Attention! Code no longer in production****Technical description**

Direct and indirect emission pendant luminaire designed to use neutral white 4000K high colour rendering LEDs. Extruded anodised aluminium perimeter profile. The down light LEDs are arranged inside the perimeter, while the up light LEDs are positioned in the upper section. The opal diffuser screen, together with an inner screen and diffusing film, allows optimum diffusion of the direct light. Luminaire set up for simultaneous switch on of both up/down light emission. Product complete with DALI driver, L=1500 mm supporting cables and special power supply base.

**Installation**

Pendant. System complete with power supply base and L= 1500 mm cables

**Colour**

Grey (15)

**Weight (Kg)**

9.2

**Mounting**

ceiling pendant

**Wiring**

product complete with DALI electronic components


Complies with EN60598-1 and pertinent regulations



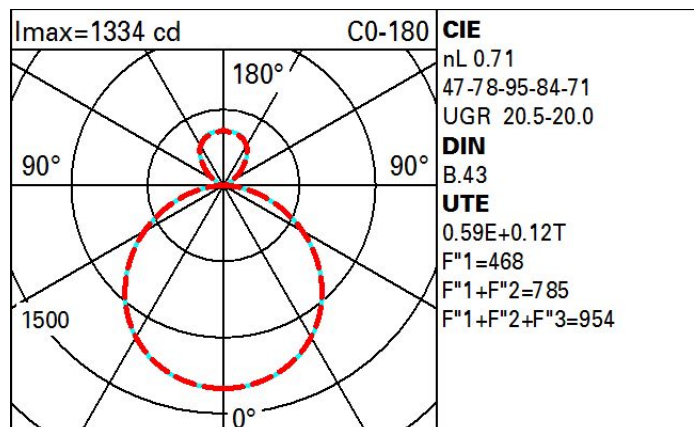
IP20



pending

**Technical data**

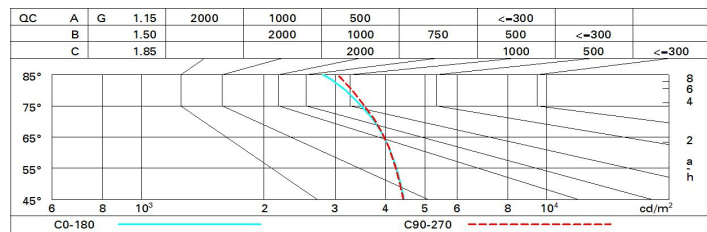
Im system:	4651	Colour temperature [K]:	4000
W system:	41.3	MacAdam Step:	3
Im source:	6550	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	37	Lamp code:	LED
Luminous efficiency (Im/W, real value):	112.6	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	756	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	71	Control:	DALI
CRI (minimum):	80		

**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	44	37	31	28	34	30	29	23	39
1.0	48	42	37	33	39	35	33	27	46
1.5	55	50	45	42	47	43	41	35	59
2.0	60	55	51	48	52	49	46	40	68
2.5	62	58	55	52	55	52	50	44	74
3.0	64	61	58	55	57	55	52	46	78
4.0	66	63	61	59	60	58	55	49	83
5.0	67	65	63	62	62	60	57	51	86

# Luminance curve limit



# UGR diagram

Corrected UGR values (at 6550 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	10.7	17.7	17.2	18.2	18.8	10.7	17.7	17.2	18.2	18.8
	3H	18.2	19.1	18.8	19.7	20.3	17.2	18.1	17.7	18.6	19.3
	4H	18.8	19.6	19.4	20.2	20.9	17.3	18.2	17.9	18.7	19.4
	6H	19.2	20.0	19.8	20.6	21.3	17.4	18.2	18.0	18.8	19.4
	8H	19.4	20.1	20.0	20.7	21.4	17.4	18.1	18.0	18.7	19.4
	12H	19.5	20.2	20.1	20.8	21.5	17.3	18.1	18.0	18.7	19.4
4H	2H	17.3	18.1	17.9	18.7	19.4	18.9	19.7	19.5	20.3	20.9
	3H	19.0	19.7	19.6	20.3	21.0	19.5	20.2	20.1	20.8	21.5
	4H	19.7	20.3	20.3	21.0	21.7	19.8	20.4	20.4	21.0	21.8
	6H	20.3	20.8	20.9	21.5	22.2	20.0	20.5	20.6	21.2	21.9
	8H	20.5	21.0	21.1	21.6	22.4	20.0	20.5	20.7	21.2	22.0
	12H	20.6	21.0	21.3	21.7	22.5	20.0	20.5	20.7	21.2	22.0
8H	4H	19.9	20.5	20.6	21.1	21.9	20.6	21.1	21.3	21.8	22.5
	6H	20.7	21.1	21.4	21.8	22.6	20.9	21.3	21.6	22.0	22.8
	8H	20.9	21.3	21.6	22.0	22.8	21.0	21.4	21.8	22.1	23.0
	12H	21.1	21.4	21.9	22.2	23.0	21.1	21.4	21.9	22.2	23.0
12H	4H	20.0	20.4	20.6	21.1	21.9	20.7	21.2	21.4	21.9	22.7
	6H	20.7	21.1	21.4	21.8	22.6	21.1	21.5	21.8	22.2	23.0
	8H	21.0	21.3	21.7	22.1	22.9	21.3	21.6	22.0	22.3	23.2
Variations with the observer position at spacing:											
S =		1.0H					0.1 / -0.1				
		1.5H					0.3 / -0.3				
		2.0H					0.4 / -0.5				