


Project name: _____

Type: _____

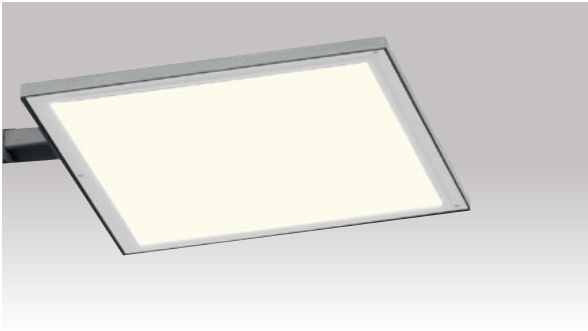

General information

Luminaire characteristics:

Power input: 37.5 to 60W
Lumens: 2150 to 4071lm (delivered)
Luminaire efficacy: 57 to 96lm/W

Source: White LED 3000K (80CRI) or 4000K (70CRI).
Lumen maintenance: >90% of initial lumens at 90 000 hours (L90), LM-80 (LED) / LM-79 tested.

Optics: U.F.O. SOFT is only available with IESNA V.

Body: Aluminum die-cast alloy EN1706AC 46100L, Stainless steel 304 fastening components and hardware.
 All gaskets are HCR Silicone 60 Shore.

Diffuser: Opal polycarbonate sealed at the factory.

Electrical: U.F.O. available with electronic driver 120-277V 50/60Hz.
Operating temperature: -40°C to 40°C.

Control: Please contact factory for dimming options.

Mounting: Universal mounting arms for Ø4" (102mm) pole diameter.


Finish: Gray (RAL9007) painted finish with a high level of weather and UV resistance. The semi-gloss finish coating is electrostatically applied, durable acrylic enamel baked at 200°C for superior color retentive finish.

Weight: Small: 22lbs (10kg) or Large: 33lbs (15kg).


Warranty: 5 year limited warranty.

Certification: cULus listed for wet location.

Ratings: IP67 and IK08.

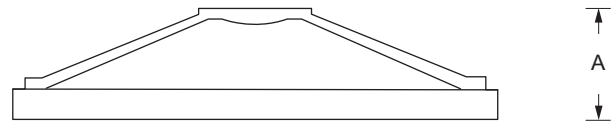

SIDE VIEW

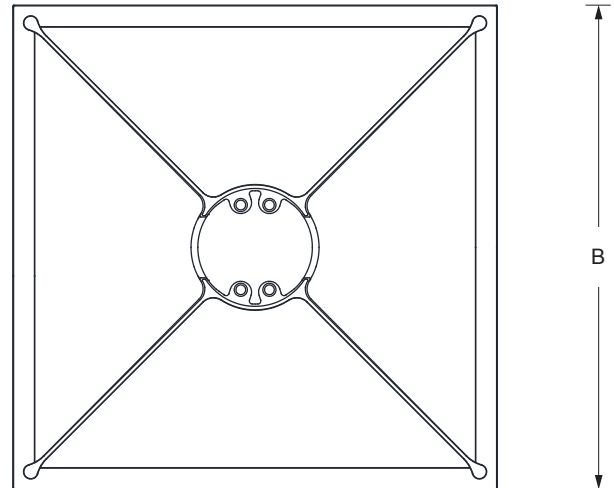


TOP VIEW

		A	∅B
SMALL	in	4-1/2	16-5/8
	mm	114	423
LARGE	in	4-7/8	25
	mm	123	634

Project name: _____

Type: _____

MODEL OPTIONS

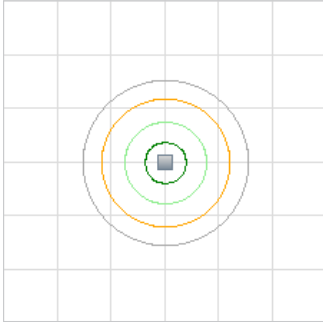


**IES V
(DIFFUSE OPTIC)**

K	SIZE	MODEL	BO (350mA)			
			L/W	LUMENS	WATT	B.U.G.
3000	S	I.BL02	57	2150	37.5	B1-U0-G1
	L	I.BL18	63	3780	60	B2-U0-G1
4000	S	I.BL03	62	2320	37.5	B1-U0-G1
	L	I.BL19	67	4071	60	B2-U0-G1



Project name: _____

Type: _____


MOUNTING OPTIONS




W - WALL MOUNT
NB: FOR SMALL VERSION ONLY




A1 - HORIZONTAL ONE
Arm length: Small: 16¹/₈" (411mm)
Large: 21³/₄" (552mm)

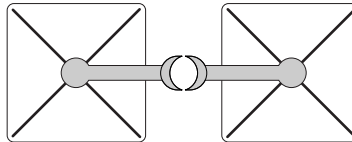

A2 - DOUBLE HORIZONTAL ONE
Arm length: Small: 2 x 16¹/₈" (411mm)
Large: 2 x 21³/₄" (552mm)

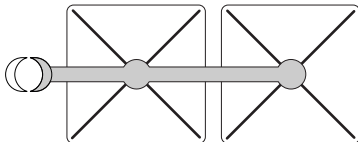

B1 - HORIZONTAL TWO
Arm length: Small: 30¹/₈" (840mm)
Large: 47¹/₈" (1196mm)

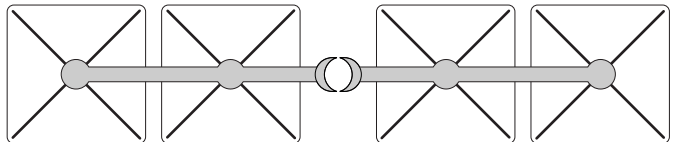

B2 - DOUBLE HORIZONTAL TWO
Arm length: Small: 2 x 30¹/₈" (840mm)
Large: 2 x 47¹/₈" (1196mm)

Project name: _____

Type: _____

ORDERING INFO

MODEL	OUTPUT	VOLTAGE	MOUNTING	FINISH
<input type="radio"/> I.BL02 <input type="radio"/> I.BL03 <input type="radio"/> I.BL18 <input type="radio"/> I.BL19	<input checked="" type="radio"/> BO - 350mA	<input checked="" type="radio"/> UNV - 120-277V	<input type="radio"/> A1 - HORIZONTAL ONE <input type="radio"/> A2 - DOUBLE HORIZONTAL ONE <input type="radio"/> B1 - HORIZONTAL TWO <input type="radio"/> B2 - DOUBLE HORIZONTAL TWO <input type="radio"/> W - WALL MOUNT	<input checked="" type="radio"/> 15 - GRAY

Project name: _____

Type: _____

POLE Ø4" (102mm)

SUPPLIED BY OTHER
CONTACT FACTORY FOR POLE DETAILS

SUPPLIED BY IGUZZINI NORTH AMERICA
CONTACT FACTORY FOR POLE SPECIFICATION

HEIGHT: _____ FT

MODEL: _____

INSTALLATION: Anchor bolts only

ACCESS DOOR: Included (3' from ground)

MATERIAL: Aluminum

Steel

FINISH: 15 - Gray RAL9007

Custom RAL _____


EPA & WEIGHT

MOUNT	SMALL		LARGE	
	WEIGHT lbs	EPA ft²	WEIGHT lbs	EPA ft²
A1	35.1	0.5	49.6	0.8
A2	60.4	0.8	89.5	1.3
B1	61.1	0.9	98.1	1.4
B2	112.4	1.6	186.5	2.6


40ft.

30ft.

20ft.

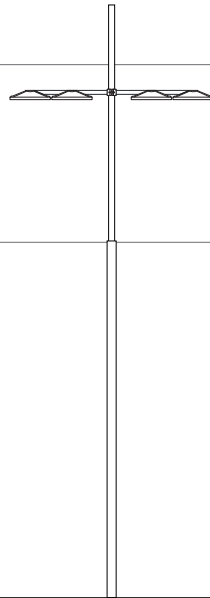

STEPPED

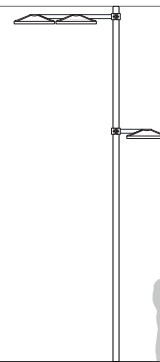

STRAIGHT