


Last information update: May 2024

**Product configuration: MT21**

MT21: 1196 X 296 mm - warm white LED - DALI control gear - general light optic opaline screen

**Product code**MT21: 1196 X 296 mm - warm white LED - DALI control gear - general light optic opaline screen **Attention! Code no longer in production****Technical description**

Direct emission recessed or ceiling-mounted luminaire (with accessories ordered separately) designed to use warm white 3,000K high colour rendering LEDs. The optical assembly consists of a white extruded frame, a satin methacrylate diffuser screen for general light emission and a sheet metal rear closing base. The LEDs are arranged inside the perimeter and the driver is housed in the upper part of the product.

**Installation**

Recessed mounted in plasterboard suspended ceilings (with accessory frame), in suspended ceilings with frame; can be ceiling-mounted with a kit to be ordered separately as an accessory

**Colour**

White (01)

**Mounting**

ceiling recessed|wall surface|ceiling surface

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations




IP20

IP43


On the visible part of the product once installed



EAC

**Technical data**


lm system:	3413	Colour temperature [K]:	3000
W system:	30.4	MacAdam Step:	3
lm source:	4550	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W source:	26	Lamp code:	LED
Luminous efficiency (lm/W, real value):	112.3	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	75	Control:	DALI
CRI:	80		

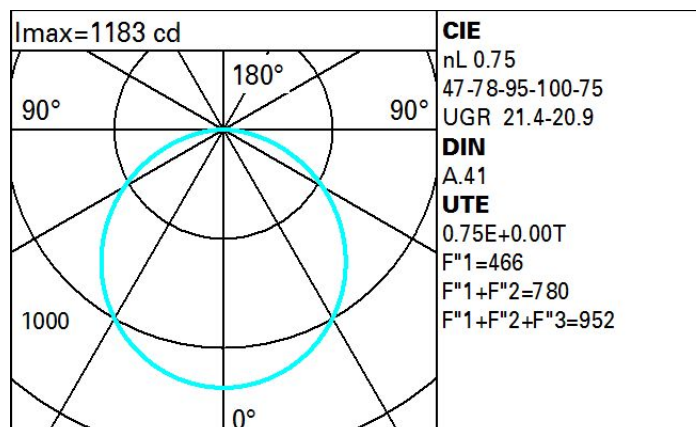**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	49	41	35	31	40	35	34	29	39
1.0	54	46	41	37	45	40	40	34	46
1.5	62	56	51	47	54	50	49	44	59
2.0	66	61	57	54	60	56	55	51	68
2.5	69	65	61	58	63	60	59	55	73
3.0	71	68	64	62	66	63	62	58	77
4.0	74	71	68	66	69	67	66	62	83
5.0	75	73	70	68	71	69	68	64	86

# Luminance curve limit

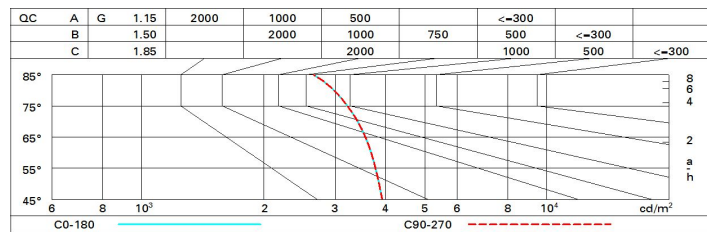

# UGR diagram

Corrected UGR values (at 4550 lm bare lamp luminous flux)											
Reflect.: ceil/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.3	18.5	17.6	18.8	19.1	17.3	18.5	17.6	18.8	19.1
	3H	18.9	20.0	19.3	20.3	20.6	17.8	18.9	18.2	19.2	19.5
	4H	19.6	20.6	19.9	20.9	21.2	18.0	19.0	18.4	19.3	19.7
	6H	20.1	21.0	20.5	21.4	21.7	18.1	19.0	18.5	19.4	19.7
	8H	20.3	21.2	20.7	21.5	21.9	18.1	19.0	18.5	19.4	19.7
	12H	20.4	21.3	20.8	21.6	22.0	18.1	19.0	18.5	19.3	19.7
4H	2H	18.0	19.0	18.4	19.3	19.7	19.6	20.6	19.9	20.9	21.2
	3H	19.8	20.7	20.2	21.0	21.4	20.3	21.1	20.7	21.5	21.9
	4H	20.6	21.4	21.0	21.7	22.1	20.6	21.4	21.0	21.7	22.1
	6H	21.2	21.9	21.7	22.3	22.7	20.8	21.5	21.3	21.9	22.3
	8H	21.4	22.1	21.9	22.5	22.9	20.9	21.5	21.3	21.9	22.4
	12H	21.6	22.2	22.1	22.6	23.1	20.9	21.5	21.4	21.9	22.4
8H	4H	20.9	21.5	21.3	21.9	22.4	21.4	22.1	21.9	22.5	22.9
	6H	21.7	22.2	22.2	22.6	23.1	21.8	22.3	22.3	22.8	23.3
	8H	22.0	22.4	22.5	22.9	23.4	22.0	22.4	22.5	22.9	23.4
	12H	22.2	22.6	22.7	23.1	23.6	22.1	22.5	22.6	23.0	23.5
12H	4H	20.9	21.5	21.4	21.9	22.4	21.6	22.2	22.1	22.6	23.1
	6H	21.7	22.2	22.2	22.7	23.2	22.0	22.5	22.5	22.9	23.5
	8H	22.1	22.5	22.6	23.0	23.5	22.2	22.6	22.7	23.1	23.6
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.1 / -0.1				
	1.5H	0.2 / -0.3					0.2 / -0.3				
	2.0H	0.3 / -0.5					0.3 / -0.5				