


Design iGuzzini iGuzzini

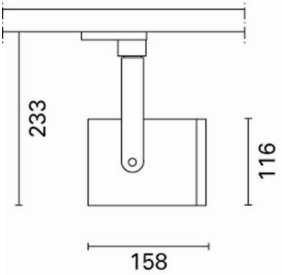

ML00: Spotlight - Small body - LED Warm White - Electronic ballast - Flood Optic

ML00: Spotlight - Small body - LED Warm White - Electronic ballast - Flood Optic **Attention! Code no longer in production**

Adjustable spotlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with ballast. The luminaire comes complete with LED unit with optic warm white tone.

On an electrified track

Weight (Kg)
1.18

three circuit track

Electronic components housed in the luminaire

Complies with EN60598-1 and pertinent regulations




Im system:	2477	CRI (minimum):	80
W system:	23.2	Colour temperature [K]:	3000
Im source:	3100	MacAdam Step:	2
W source:	21	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	106.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1
Beam angle [°]:	42°		

	CIE nL 0.80 99-100-100-100-80 UGR <10-10		Lux			
	DIN A.61		h	d	Em	Emax
	UTE 0.80A+0.00T F*1=991 F*1+F*2=998 F*1+F*2+F*3=999		2	1.5	1059	1306
	CIBSE LG3 L<1500 cd/m ² at 6° UGR<10 L<1500 cd/mq @65°		4	3.1	265	327
			6	4.6	118	145
α=42°			8	6.1	66	82

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	63	67	65	65	62	78
1.0	75	72	69	67	71	69	68	66	82
1.5	79	76	74	73	75	74	73	70	88
2.0	81	79	78	77	78	77	76	74	93
2.5	83	81	80	79	80	79	78	76	95
3.0	84	83	82	81	82	81	80	78	97
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	84	84	84	83	82	80	100

Luminance curve limit

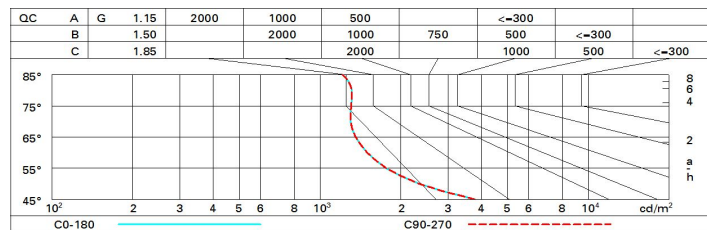

UGR diagram

Corrected UGR values (at 3100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	8.8	9.4	9.1	9.6	9.9	8.8	9.4	9.1	9.6	9.9
	3H	8.8	9.3	9.1	9.6	9.8	8.7	9.2	9.0	9.5	9.8
	4H	8.8	9.3	9.1	9.6	9.9	8.7	9.1	9.0	9.4	9.7
	6H	8.8	9.2	9.1	9.5	9.9	8.6	9.0	8.9	9.4	9.7
	8H	8.8	9.2	9.1	9.5	9.9	8.6	9.0	8.9	9.3	9.7
	12H	8.8	9.2	9.1	9.5	9.9	8.5	8.9	8.9	9.3	9.6
4H	2H	8.7	9.1	9.0	9.4	9.7	8.8	9.3	9.1	9.6	9.9
	3H	8.7	9.1	9.0	9.4	9.8	8.7	9.1	9.1	9.5	9.8
	4H	8.7	9.0	9.1	9.4	9.8	8.7	9.0	9.1	9.4	9.8
	6H	8.7	9.0	9.1	9.4	9.8	8.6	9.0	9.1	9.4	9.8
	8H	8.7	9.0	9.2	9.4	9.9	8.6	8.9	9.0	9.3	9.7
	12H	8.7	9.0	9.2	9.4	9.9	8.6	8.8	9.0	9.3	9.7
8H	4H	8.6	8.9	9.0	9.3	9.7	8.7	9.0	9.2	9.4	9.9
	6H	8.7	8.9	9.2	9.4	9.8	8.7	9.0	9.2	9.4	9.9
	8H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
	12H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
12H	4H	8.6	8.8	9.0	9.3	9.7	8.7	9.0	9.2	9.4	9.9
	6H	8.7	8.9	9.1	9.3	9.8	8.7	8.9	9.2	9.4	9.9
	8H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
Variations with the observer position at spacing:											
S =	1.0H	5.3 / -4.9					5.3 / -4.9				
	1.5H	8.0 / -5.3					8.0 / -5.3				
	2.0H	10.0 / -5.5					10.0 / -5.5				