


Last information update: February 2025

Product configuration: EJ70

EJ70: Square Recessed luminaire - LED - Warm white - Flood optic



Product code

EJ70: Square Recessed luminaire - LED - Warm white - Flood optic

Technical description

square miniaturised recessed luminaire for single LED - fixed optic - flood beam angle. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optic, integrated in a rear position in the black anti-glare screen. Connecting cable supplied. Ballast not included, available with separate code. Warm white LED.

Installation

recessed with steel wire springs for false ceilings from 1 to 20 mm thick - preparation hole 35 x 35

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

Weight (Kg)

0.05

* Colours on request


Mounting

wall recessed|ceiling recessed

Wiring

direct current ballasts to be ordered separately: electronic (MXF9) for max. 7 LEDs; DALI dimmable (BZM4) for max. 20 LEDs (check instructions leaflet for compatible lengths of cables to be used)


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	179	CRI (typical):	92
W system:	2	Colour temperature [K]:	2700
lm source:	210	MacAdam Step:	3
W source:	2	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	89.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	85	Number of optical assemblies:	1
Beam angle [°]:	32°	LED current [mA]:	700
CRI (minimum):	90		

Polar

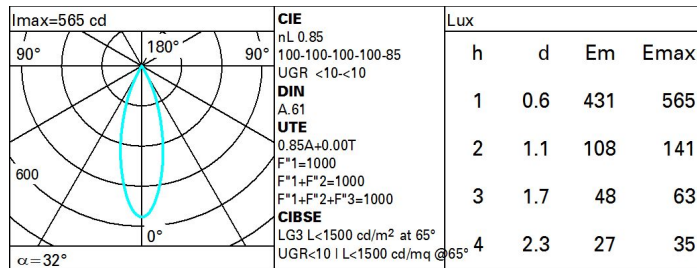

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	77	73	70	68	72	70	69	67	78
1.0	80	77	74	72	76	74	73	71	83
1.5	84	81	79	78	80	79	78	75	89
2.0	87	85	83	82	84	82	81	79	93
2.5	88	87	86	85	86	85	84	81	96
3.0	89	88	88	87	87	86	85	83	98
4.0	90	90	89	89	88	88	87	84	99
5.0	91	90	90	90	89	89	87	85	100

UGR diagram

Corrected UGR values (at 210 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	-3.0	-2.5	-2.7	-2.2	-2.0	-3.0	-2.5	-2.7	-2.2	-2.0
	3H	-3.1	-2.6	-2.8	-2.4	-2.1	-3.1	-2.6	-2.8	-2.4	-2.1
	4H	-3.2	-2.8	-2.9	-2.5	-2.2	-3.2	-2.8	-2.9	-2.5	-2.2
	6H	-3.3	-2.9	-2.9	-2.6	-2.2	-3.3	-2.9	-2.9	-2.6	-2.2
	8H	-3.3	-2.9	-3.0	-2.6	-2.3	-3.3	-2.9	-3.0	-2.6	-2.3
	12H	-3.4	-3.0	-3.0	-2.6	-2.3	-3.4	-3.0	-3.0	-2.6	-2.3
4H	2H	-3.2	-2.8	-2.9	-2.5	-2.2	-3.2	-2.8	-2.9	-2.5	-2.2
	3H	-3.4	-3.0	-3.0	-2.6	-2.3	-3.4	-3.0	-3.0	-2.6	-2.3
	4H	-3.4	-3.1	-3.0	-2.7	-2.4	-3.4	-3.1	-3.0	-2.7	-2.4
	6H	-3.5	-3.2	-3.1	-2.8	-2.4	-3.5	-3.2	-3.1	-2.8	-2.4
	8H	-3.6	-3.3	-3.1	-2.9	-2.5	-3.6	-3.3	-3.1	-2.9	-2.5
	12H	-3.6	-3.4	-3.2	-3.0	-2.5	-3.6	-3.4	-3.2	-3.0	-2.5
8H	4H	-3.6	-3.3	-3.1	-2.9	-2.5	-3.6	-3.3	-3.1	-2.9	-2.5
	6H	-3.7	-3.5	-3.2	-3.0	-2.5	-3.7	-3.5	-3.2	-3.0	-2.5
	8H	-3.7	-3.5	-3.2	-3.1	-2.6	-3.7	-3.5	-3.2	-3.1	-2.6
	12H	-3.8	-3.6	-3.3	-3.1	-2.6	-3.8	-3.6	-3.3	-3.1	-2.6
12H	4H	-3.6	-3.4	-3.2	-3.0	-2.5	-3.6	-3.4	-3.2	-3.0	-2.5
	6H	-3.7	-3.5	-3.2	-3.1	-2.6	-3.7	-3.5	-3.2	-3.1	-2.6
	8H	-3.8	-3.6	-3.3	-3.1	-2.6	-3.8	-3.6	-3.3	-3.1	-2.6
Variations with the observer position at spacing:											
S =	1.0H	0.9 / -25.5					0.9 / -25.5				
	1.5H	9.7 / -26.0					9.7 / -26.0				
	2.0H	11.7 / -26.8					11.7 / -26.8				