

## View Opti Beam Lens square

Design iGuzzini /  
Arup

iGuzzini

Last information update: May 2024

### Product configuration: Q348

Q348: square large body spotlight - medium



### Product code

Q348: square large body spotlight - medium **Attention! Code no longer in production**

### Technical description

Indoor adjustable spotlight with adapter for installation on a three-phase/DALI track. Device made of die-cast aluminium and a front part made of a thermoplastic material. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Optical assembly consisting of Neutral White tone 4000K LEDs with OPTIBEAM LENS technology and a medium light beam. Dimmable DALI driver built-in to box with a semi-hidden system on track. Option of installing a range of flat accessories including an OPTIBEAM REFRACTOR for varying light distribution, an elliptical distribution refractor, a louver, a soft lens and an outdoor accessory like an asymmetric visor for eliminating stray light dispersion on the ceiling.

### Installation

On a three-phase/DALI electrified track

### Colour

Black (04) | Black / White (47)

### Weight (Kg)

1.79


### Mounting

dali track|three circuit track

### Wiring

Product complete with DALI dimmable components, housed in a semi-hidden box on the track.

Complies with EN60598-1 and pertinent regulations




### Technical data

Im system:	3096	CRI (minimum):	80
W system:	29	Colour temperature [K]:	4000
Im source:	3600	MacAdam Step:	2
W source:	24	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	106.8	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	86	Number of optical assemblies:	1
Beam angle [°]:	28°	Control:	DALI

### Polar

Imax=11105 cd		Lux			
90°	180°	90°	h	d	Em Emax
			2	1	2239 2776
			4	2	560 694
			6	3	249 308
			8	4	140 174
$\alpha = 28^\circ$					

### Isolux

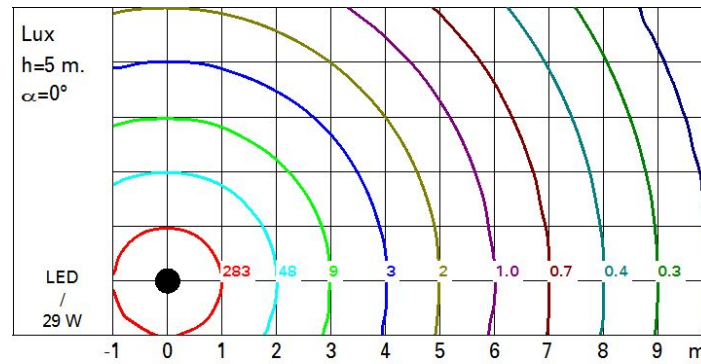

### UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	13.6	15.6	14.0	15.9	16.2	13.6	15.6	14.0	15.9	16.2
	3H	14.5	16.0	14.9	16.3	16.7	13.9	15.5	14.3	15.8	16.1
	4H	14.8	16.0	15.1	16.4	16.7	14.1	15.3	14.4	15.7	16.0
	6H	14.9	16.0	15.3	16.3	16.7	14.1	15.1	14.5	15.4	15.8
	8H	15.0	16.0	15.4	16.3	16.7	14.1	15.1	14.5	15.4	15.8
	12H	14.9	15.9	15.3	16.3	16.7	14.0	15.0	14.4	15.4	15.7
4H	2H	14.1	15.3	14.4	15.7	16.0	14.8	16.0	15.1	16.4	16.7
	3H	15.1	16.1	15.5	16.4	16.8	15.3	16.3	15.7	16.6	17.0
	4H	15.4	16.4	15.9	16.8	17.2	15.4	16.4	15.9	16.8	17.2
	6H	15.4	17.0	15.9	17.4	17.9	15.3	16.8	15.7	17.3	17.7
	8H	15.3	17.1	15.8	17.6	18.1	15.2	16.9	15.7	17.4	17.9
	12H	15.3	17.1	15.8	17.6	18.1	15.1	16.9	15.6	17.4	17.9
8H	4H	15.2	16.9	15.7	17.4	17.9	15.3	17.1	15.8	17.6	18.1
	6H	15.4	17.1	15.9	17.6	18.1	15.5	17.2	16.0	17.6	18.2
	8H	15.5	17.0	16.0	17.5	18.1	15.5	17.0	16.0	17.5	18.1
	12H	15.7	16.7	16.2	17.2	17.8	15.7	16.7	16.2	17.2	17.8
12H	4H	15.1	16.9	15.6	17.4	17.9	15.3	17.1	15.8	17.6	18.1
	6H	15.4	17.0	16.0	17.4	18.0	15.5	17.0	16.0	17.5	18.0
	8H	15.7	16.7	16.2	17.2	17.8	15.7	16.7	16.2	17.2	17.8
Variations with the observer position at spacing:											
S =		1.0H	0.4 / -0.3				0.4 / -0.3				
		1.5H	1.0 / -0.9				1.0 / -0.9				
		2.0H	1.7 / -1.4				1.7 / -1.4				