


Last information update: May 2025

Product configuration: Q262

Q262: fixed circular recessed luminaire - Ø125 mm - tunable white

**Product code**

Q262: fixed circular recessed luminaire - Ø125 mm - tunable white

Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with tunable White LED with a colour change temperature from 2700K to 6500K. General light emission, with controlled luminance $UGR < 19$ 1500 cd/m^2 $\alpha > 65^\circ$ flood optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1

Mounting

ceiling recessed

Wiring

Product complete with DALI dimmable power supply.

Notes

TPb rated
DT8 - 1 DALI address

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	1659	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W system:	16.9	Lamp code:	LED
Im source:	2100	Number of lamps for optical assembly:	1
W source:	15	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	98.2	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Minimum dimming %:	1
Light Output Ratio (L.O.R.) [%]:	79	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Beam angle [°]:	66°	Control:	DALI-2
Colour temperature [K]:	Tunable white 2700 - 6500		


Polar

Imax=1567 cd		CIE		Lux			
				h	d	Em	Emax
90°	180°	nL 0.79	96-100-100-100-79	1	1.3	1159	1432
		UGR 18.2-18.2	DIN A.61	2	2.6	290	358
		UTE 0.79A+0.00T	F*1=959	3	3.9	129	159
		F*1+F*2=1000	F*1+F*2+F*3=1000	4	5.2	72	89
		CIBSE LG3 L<1500 cd/m² at 65°	UGR<19 L<1500 cd/mq @ 65°				
$\alpha = 66^\circ$							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	63	61	65	63	62	60	75
1.0	73	70	67	65	69	67	66	64	80
1.5	77	75	73	71	74	72	71	69	87
2.0	80	78	76	75	77	75	75	72	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	80	79	78	76	97
4.0	84	83	82	82	81	81	80	78	98
5.0	84	84	83	83	82	82	80	78	99

Luminance curve limit

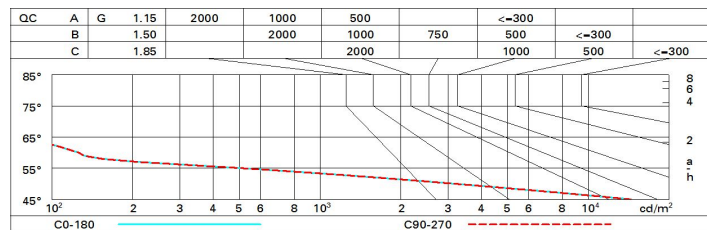

UGR diagram

Corrected UGR values (at 2100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	18.8	19.4	19.1	19.7	19.9	18.8	19.4	19.1	19.7	19.9
	3H	18.7	19.2	19.0	19.5	19.8	18.7	19.2	19.0	19.5	19.8
	4H	18.6	19.1	18.9	19.4	19.7	18.6	19.1	18.9	19.4	19.7
	6H	18.5	19.0	18.9	19.3	19.6	18.5	19.0	18.9	19.3	19.6
	8H	18.5	18.9	18.9	19.3	19.6	18.5	18.9	18.9	19.3	19.6
	12H	18.5	18.9	18.8	19.2	19.6	18.5	18.9	18.8	19.2	19.6
4H	2H	18.6	19.1	18.9	19.4	19.7	18.6	19.1	18.9	19.4	19.7
	3H	18.5	18.9	18.8	19.2	19.6	18.5	18.9	18.8	19.2	19.6
	4H	18.4	18.7	18.8	19.1	19.5	18.4	18.7	18.8	19.1	19.5
	6H	18.3	18.6	18.7	19.0	19.4	18.3	18.6	18.7	19.0	19.4
	8H	18.2	18.5	18.7	18.9	19.4	18.2	18.5	18.7	18.9	19.4
	12H	18.2	18.5	18.6	18.9	19.3	18.2	18.5	18.6	18.9	19.3
8H	4H	18.2	18.5	18.7	18.9	19.4	18.2	18.5	18.7	18.9	19.4
	6H	18.1	18.4	18.6	18.8	19.3	18.1	18.4	18.6	18.8	19.3
	8H	18.1	18.3	18.6	18.8	19.3	18.1	18.3	18.6	18.8	19.3
	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
12H	4H	18.2	18.5	18.6	18.9	19.3	18.2	18.5	18.6	18.9	19.3
	6H	18.1	18.3	18.6	18.8	19.3	18.1	18.3	18.6	18.8	19.3
	8H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2
Variations with the observer position at spacing:											
S =	1.0H	4.6 / -25.8					4.6 / -25.8				
	1.5H	7.4 / -32.6					7.4 / -32.6				
	2.0H	9.4 / -33.5					9.4 / -33.5				